



SUMMARY TEST DATA ON BPM-2G18G-180-SFF-MB

Customer: _____
Job No: _____
Model No: **BPM-2G18G-180-SFF-MB**
Serial No: **PL52974/2519**

Tested By: **A. Mousavi**
Date: **5/10/2025**
Temp: **25°C**
Drawing No: **27631760** Rev: **A1**

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz	PMI QA
2	Insertion Loss:	5.5 dB Max.	4.9 dB See Plot	
3	VSWR:	2.0:1 Max. 1.5:1 Goal.	1.91:1 See Plot	
5	Speed:	100 ns Max On/Off	See Typical Charaterisitcs	
6	Phase Shift	$\pm 30^\circ$	+ 27.37 ° - 11.87 °	
7	Amplitude Balance:	± 2.0 dB	+ 1.92 dB - 0.49 dB	
8	Phase Shift Control Input	TTL "0" = 0° TTL "1" = 180°	PASS	
9	DC Supply:	+5 VDC @ 70 mA Max. -12 VDC @ 30 mA Max.	+5 VDC @ 42 mA -12VDC @ 8 mA	PMI QA

QA/QC Approval:

Carmereng Velazquez


Date: **5/12/25**




SUMMARY TEST DATA ON BPM-2G18G-180-SFF-MB

PL52974/2519

Insertion Loss at Phase Settings

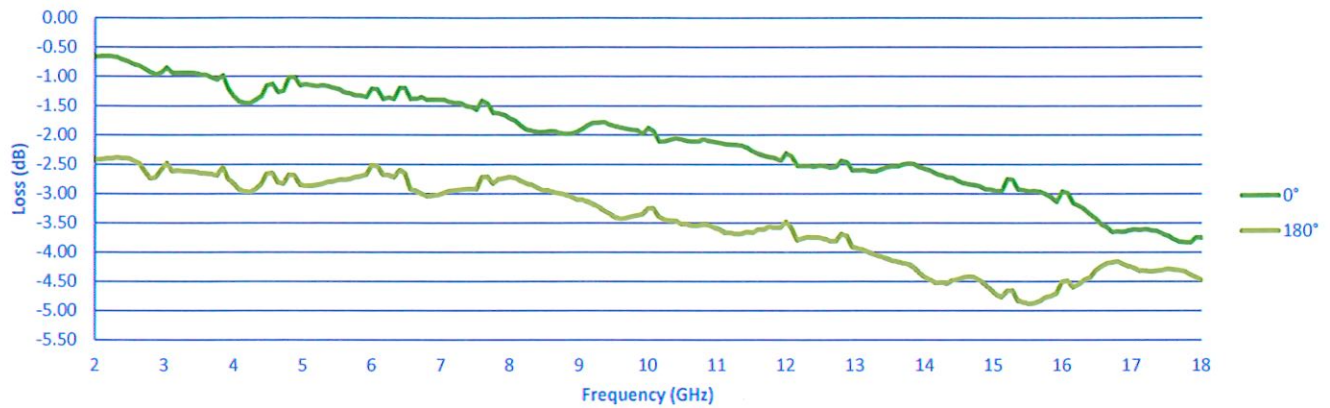

VSWR (Input)

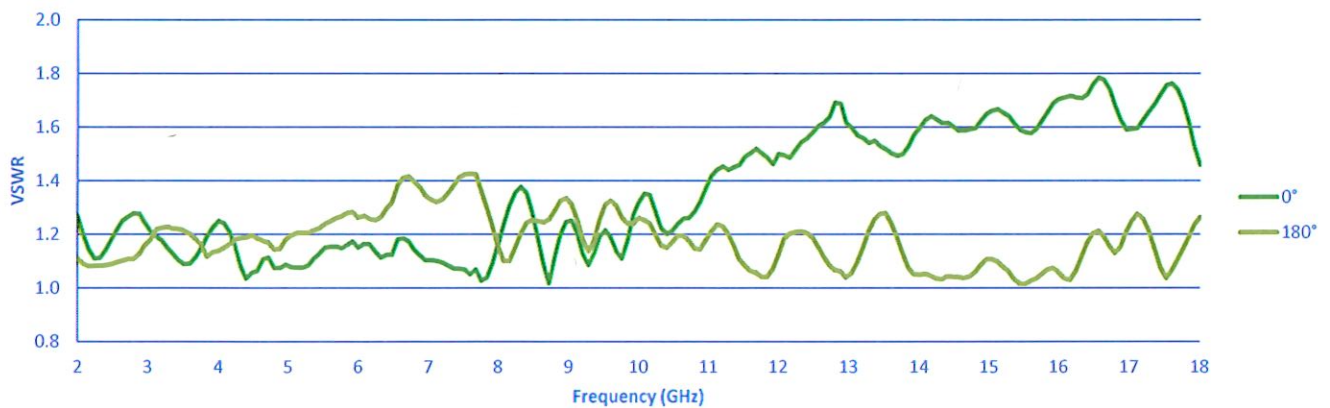

VSWR (Output)







SUMMARY TEST DATA ON BPM-2G18G-180-SFF-MB

PL52974/2519

PHASE SHIFT FROM NORMALIZED 0° STATE

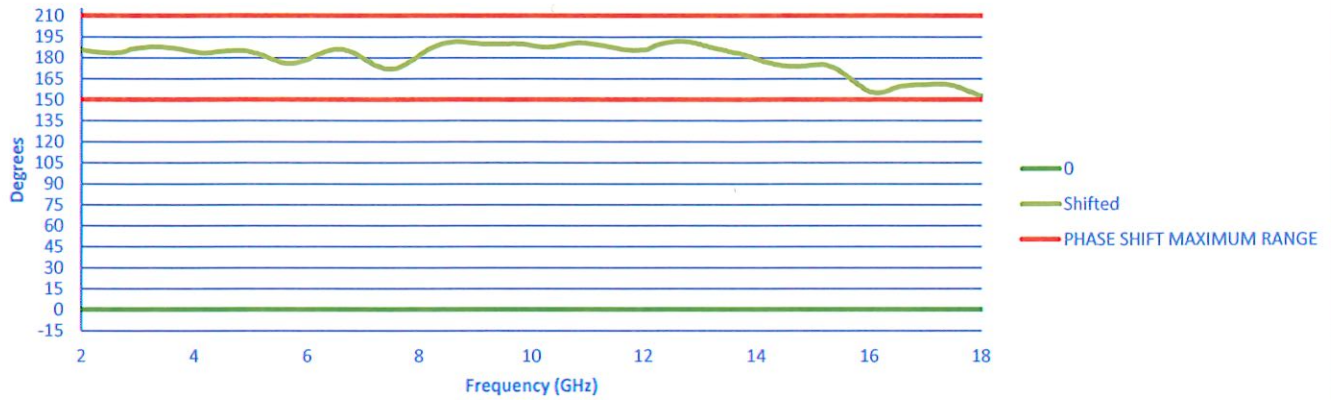

PHASE SHIFT DELTA FROM TARGET 180°

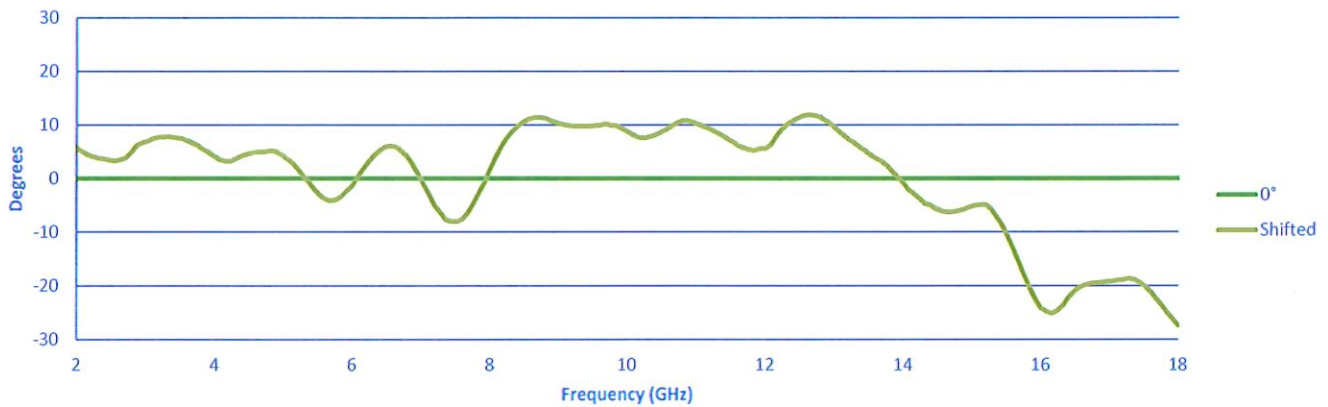

AMPLITUDE BALANCE FROM NORMALIZED 0° STATE

