



**SUMMARY TEST DATA
ON
BPM-2G18G-180-SFF-MB**

Customer: _____
Job No: _____
Model No: **BPM-2G18G-180-SFF-MB**
Serial No: **PL53013/2521**

Tested By: **A. Mousavi**
Date: **Wednesday, May 14, 2025**
Temp: **25°C**
Drawing No: **27631760** Rev: **A1**

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 to 18.0 GHz	2.0 to 18.0 GHz	PMI QA4
2	Insertion Loss:	5.5 dB Max.	5.2 dB See Plot	
3	VSWR:	2.0:1 Max. 1.5:1 Goal.	1.58:1 See Plot	
5	Speed:	100 ns Max On/Off	See Typical Charaterisitcs	
6	Phase Shift	±30°	+ 28.86 ° - 4.84 °	
7	Amplitude Balance:	±2.0 dB	+ 1.94 dB - 0.82 dB	
8	Phase Shift Control Input	TTL "0" = 0° TTL "1" = 180°	PASS	
9	DC Supply:	+5 VDC @ 70 mA Max. -12 VDC @ 30 mA Max.	+5 VDC @ 42 mA -12VDC @ 8 mA	PMI QA4

QA/QC Approval: _____

Cammeron Kelly


Date: 5/14/25




**SUMMARY TEST DATA
ON
BPM-2G18G-180-SFF-MB**

PL53013/2521


Insertion Loss at Phase Settings

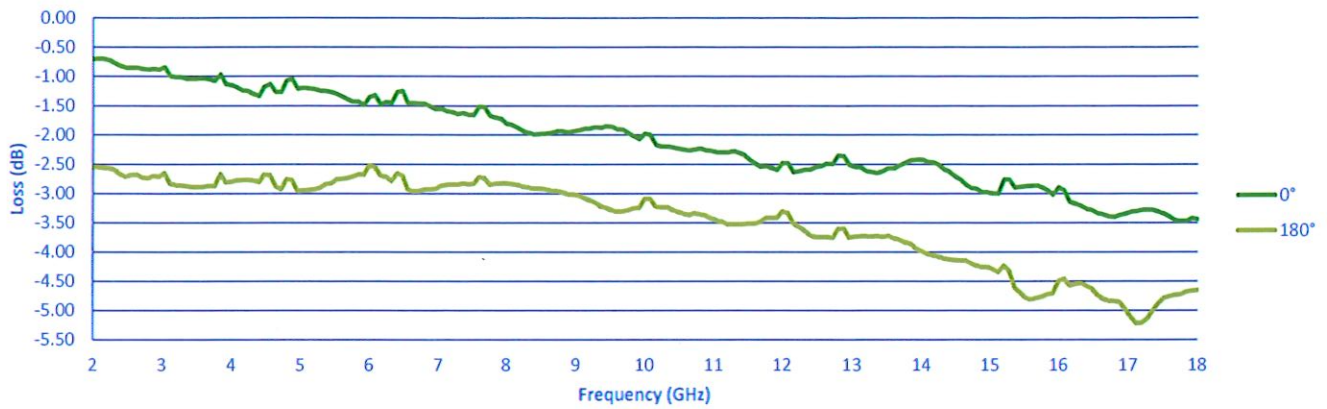

VSWR (Input)

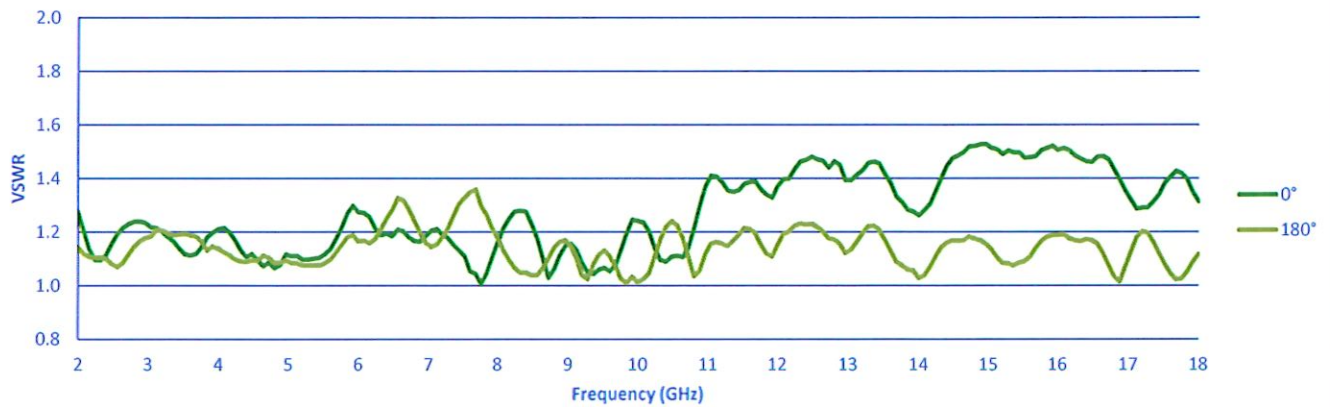

VSWR (Output)

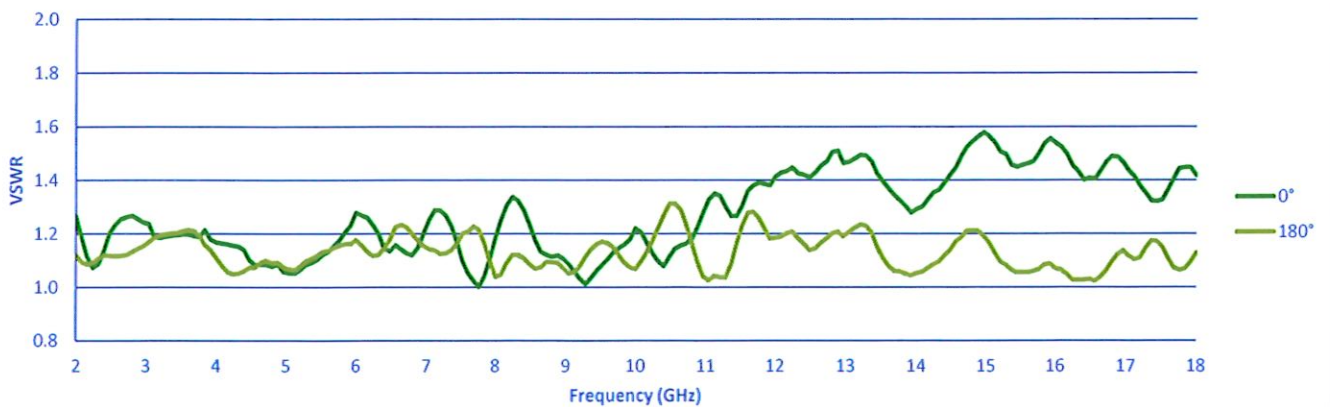





SUMMARY TEST DATA ON BPM-2G18G-180-SFF-MB

PL53013/2521

PHASE SHIFT FROM NORMALIZED 0° STATE

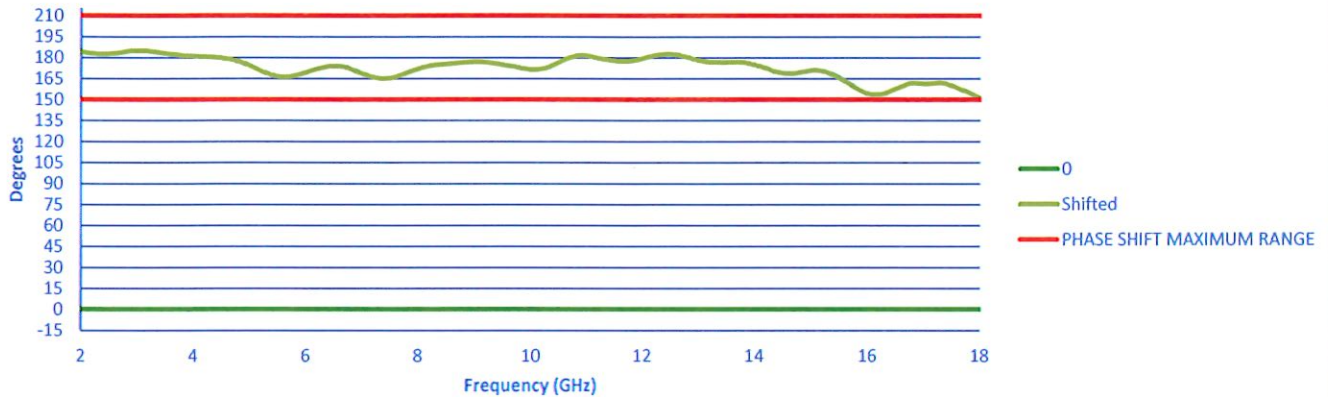

PHASE SHIFT DELTA FROM TARGET 180°

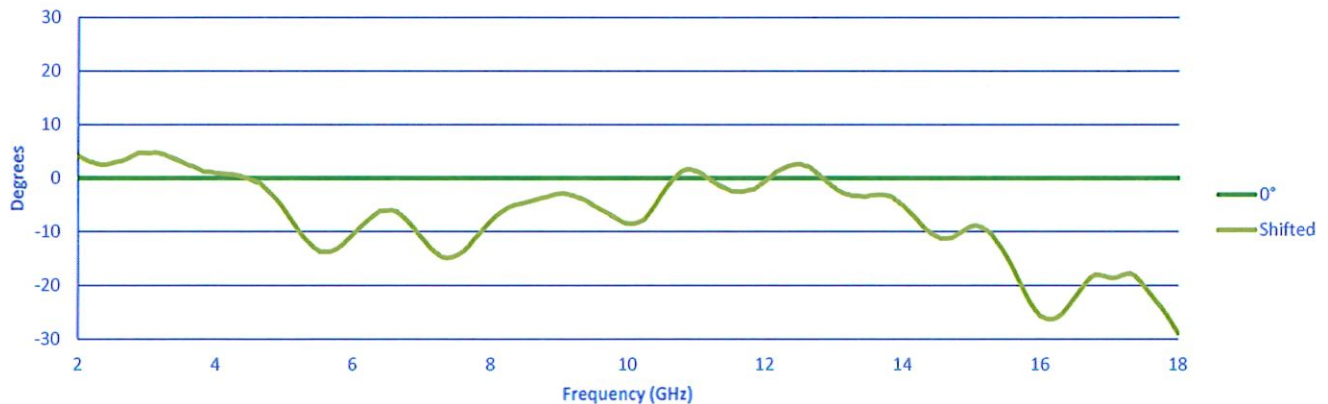

AMPLITUDE BALANCE FROM NORMALIZED 0° STATE

