




Summary Data
For
ERDLVA-218-CW-75MV

Customer: _____
 SO No: _____
 Model No: ERDLVA-218-CW-75MV
 Serial No: PL35870

Tested By: JOHNM
 Temperature: -28C, 25C, 85C
 Date 4/5/2022
 Drawing No: 27642440 Rev: A1

| TEST ITEM NO | PARAMETERS | SPECIFIED VALUE | TEST RESULTS | QA QC |
|--------------|-------------------------------------|---|------------------------|------------|
| 1 | Frequency Range: | 2 to 18 GHz | 2 to 18 GHz | PMI QA3 |
| 2 | VSWR: | 2.5:1 MAX @ -20 dBm | 1.24:1 MAX | |
| 3 | Input Power: | 23 dBm Max. | Pass | |
| 4 | VIDEO OUT TSS: | -42 dBm MAX | -43dBm | |
| 5 | VIDEO OUT Dynamic Range: | -40 to +20 dBm | -40 to +20 dBm | |
| 6 | VIDEO OUT Log Slope Fixed: | 75 ± 10mV/dB | 73.4-76.9mV/dB | |
| 7 | VIDEO OUT Log Linearity: | ±1.0 dB MAX @25C ±1.5 dB MAX @ Over Temperature | See attached Graphs | |
| 8 | VIDEO OUT DC Offset: | 0 to 125 mV @25C | 107mV | |
| 9 | VIDEO OUT Rise Time (10% to 90%): | 25 ns MAX | 21.3ns | |
| 10 | VIDEO OUT Settling Time: | ±0.5dB within 25ns from 90% | <0.5dB | |
| 11 | VIDEO OUT Recovery Time: | 500ns MAX | 300ns | |
| 12 | VIDEO OUT Video Frequency Flatness: | 3.0 dB p-p MAX @ -20dBm | 3.0dB p-p MAX @ -20dBm | |



**Summary Data
For
ERDLVA-218-CW-75MV**

| | | | | |
|----|---|--|---------------------------------|--------------------------|
| 13 | VIDEO OUT CW Immunity: | CW Immune Power -50 to -10 dBm | Pass | PMI QAS |
| | | CW Attack Time 1500us | 1400us | |
| | | CW Release Time 250us | 30us | |
| 17 | Pulse droop | 1dB Max for 250us pulses | <1dB | |
| 18 | VIDEO OUT Pulse Response, input Signal: | 100 ns to 300 us | 100 ns to 300 us | |
| 19 | VIDEO LOAD Impedance: | 93 ±1 Ω | 93Ω | |
| 21 | VIDEO OUT Noise Level (RMS): | 102 mV max | 52mV | |
| 22 | VIDEO OUT Propagation Delay: | 35 ns MAX from RF 10% to 10% video (excluding cable) | 30ns | |
| 23 | Power Supply | +12 V @ 250 mA MAX -12 V @ 250 mA MAX | +12 V @ 150 mA -12 V @ 60 mA | |

QA/QC Approval: *H. Newton Morgan* Date: 4-7-22



PLANAR MONOLITHICS INDUSTRIES
 4921 Robert J. Mathews Parkway, Suite 1
 El Dorado Hills, CA 95762
 Phone: 916-542-1401 Fax: 301-662-1731
 Email: sales@pmi-rf.com | www.pmi-

LOG TRANSFER WITH FREQUENCY
 MODEL: ERDLVA-218-CW-75MV
 TESTED BY: J.Merriner
 DATE: 3-30-22
 SERIAL NO: PL 35870
 Test Temp: +25C

VOS= 107MV

Frequency

| | | |
|-------|----------------|------|
| 2 GHz | INTERCEPT (mV) | 3267 |
| | SLOPE (mV/dB) | 72.5 |

| | | | | | | | | | | | | |
|-------|-------|-------|-------|------|------|------|-------|-------|-------|------|-------|------|
| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
| 361 | 725 | 1085 | 1443 | 1849 | 2209 | 2544 | 2888 | 3232 | 3626 | 4012 | 4353 | 4720 |
| -5 | -4 | -7 | -11 | 32 | 30 | 2 | -17 | -35 | -4 | 19 | -2 | 2 |
| -0.07 | -0.06 | -0.09 | -0.15 | 0.44 | 0.41 | 0.03 | -0.23 | -0.49 | -0.05 | 0.27 | -0.03 | 0.03 |

RF Input Power (dBm)

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|----------|----------------|------|
| 4.67 GHz | INTERCEPT (mV) | 3312 |
| | SLOPE (mV/dB) | 75.6 |

| | | | | | | | | | | | | |
|------|-------|-------|-------|-------|------|------|------|------|------|------|-------|-------|
| 310 | 658 | 1020 | 1390 | 1783 | 2182 | 2582 | 2958 | 3319 | 3700 | 4086 | 4441 | 4790 |
| 24 | -6 | -22 | -31 | -16 | 5 | 27 | 24 | 7 | 10 | 18 | -5 | -35 |
| 0.32 | -0.08 | -0.30 | -0.40 | -0.21 | 0.07 | 0.35 | 0.32 | 0.10 | 0.13 | 0.24 | -0.07 | -0.46 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|----------|----------------|------|
| 7.33 GHz | INTERCEPT (mV) | 3352 |
| | SLOPE (mV/dB) | 75.2 |

| | | | | | | | | | | | | |
|------|------|-------|-------|------|------|------|------|------|-------|------|------|-------|
| 348 | 721 | 1077 | 1441 | 1847 | 2237 | 2628 | 2995 | 3352 | 3721 | 4113 | 4481 | 4832 |
| 5 | 2 | -18 | -30 | 0 | 14 | 29 | 19 | 0 | -7 | 9 | 1 | -24 |
| 0.07 | 0.03 | -0.24 | -0.40 | 0.00 | 0.18 | 0.38 | 0.26 | 0.00 | -0.09 | 0.12 | 0.01 | -0.32 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|--------|----------------|------|
| 10 GHz | INTERCEPT (mV) | 3448 |
| | SLOPE (mV/dB) | 75.3 |

| | | | | | | | | | | | | |
|-------|------|-------|-------|------|------|------|------|------|------|------|-------|-------|
| 430 | 815 | 1175 | 1529 | 1947 | 2336 | 2721 | 3078 | 3462 | 3835 | 4217 | 4575 | 4911 |
| -5 | 3 | -13 | -36 | 6 | 18 | 26 | 7 | 14 | 10 | 16 | -3 | -43 |
| -0.07 | 0.04 | -0.18 | -0.48 | 0.07 | 0.24 | 0.35 | 0.09 | 0.19 | 0.14 | 0.21 | -0.04 | -0.58 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|-----------|----------------|------|
| 12.67 GHz | INTERCEPT (mV) | 3420 |
| | SLOPE (mV/dB) | 75.4 |

| | | | | | | | | | | | | |
|-------|------|-------|-------|------|------|------|------|------|-------|------|------|-------|
| 400 | 787 | 1143 | 1501 | 1916 | 2306 | 2694 | 3053 | 3428 | 3789 | 4178 | 4562 | 4898 |
| -3 | 7 | -14 | -33 | 4 | 17 | 28 | 10 | 8 | -8 | 4 | 11 | -31 |
| -0.04 | 0.09 | -0.19 | -0.44 | 0.06 | 0.23 | 0.37 | 0.13 | 0.11 | -0.11 | 0.05 | 0.14 | -0.41 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|-----------|----------------|------|
| 15.33 GHz | INTERCEPT (mV) | 3397 |
| | SLOPE (mV/dB) | 75.7 |

| | | | | | | | | | | | | |
|------|------|-------|-------|------|------|------|------|------|-------|------|------|-------|
| 372 | 754 | 1111 | 1470 | 1883 | 2275 | 2671 | 3034 | 3405 | 3765 | 4155 | 4539 | 4887 |
| 3 | 6 | -15 | -35 | 0 | 13 | 31 | 15 | 8 | -10 | 1 | 7 | -24 |
| 0.04 | 0.08 | -0.20 | -0.46 | 0.00 | 0.18 | 0.41 | 0.20 | 0.11 | -0.14 | 0.01 | 0.09 | -0.31 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|--------|----------------|------|
| 18 GHz | INTERCEPT (mV) | 3296 |
| | SLOPE (mV/dB) | 73.5 |

| | | | | | | | | | | | | |
|-------|------|-------|-------|------|------|------|------|-------|-------|-------|------|------|
| 347 | 724 | 1080 | 1443 | 1848 | 2222 | 2573 | 2928 | 3274 | 3636 | 4025 | 4400 | 4785 |
| -7 | 2 | -10 | -14 | 23 | 29 | 13 | 0 | -22 | -28 | -6 | 1 | 18 |
| -0.10 | 0.03 | -0.13 | -0.19 | 0.31 | 0.40 | 0.17 | 0.00 | -0.30 | -0.37 | -0.09 | 0.01 | 0.25 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

Flatness P-P

| | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 1.6 | 2.0 | 2.0 | 1.8 | 2.2 | 2.0 | 2.4 | 2.6 | 3.0 | 2.8 | 2.8 | 3.0 | 2.6 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

| | |
|------------------|------|
| Slope Avg(mv/dB) | 74.8 |
|------------------|------|



PLANAR MONOLITHICS INDUSTRIES
 4921 Robert J. Mathews Parkway, Suite 1
 El Dorado Hills, CA 95762
 Phone: 916-542-1401 Fax: 301-662-1731
 Email: sales@pmi-rf.com | www.pmi-

LOG TRANSFER WITH FREQUENCY
 MODEL: ERDLVA-218-CW-75MV
 TESTED BY: J.Merriner
 DATE: 3-30-22
 SERIAL NO: PL 35870
 Test Temp: -28C

VOS= 80MV

Frequency

| | | |
|-------|----------------|------|
| 2 GHz | INTERCEPT (mV) | 3347 |
| | SLOPE (mV/dB) | 75.3 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|------|------|-------|-------|------|------|-------|-------|-------|-------|------|------|------|
| 357 | 729 | 1087 | 1418 | 1842 | 2239 | 2592 | 2957 | 3314 | 3707 | 4108 | 4500 | 4866 |
| 22 | 18 | -1 | -46 | 1 | 22 | -2 | -13 | -33 | -16 | 8 | 24 | 13 |
| 0.30 | 0.24 | -0.01 | -0.61 | 0.02 | 0.29 | -0.02 | -0.17 | -0.43 | -0.21 | 0.11 | 0.32 | 0.18 |

RF Input Power (dBm)

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|----------|----------------|------|
| 4.67 GHz | INTERCEPT (mV) | 3384 |
| | SLOPE (mV/dB) | 78.0 |

| | | | | | | | | | | | | |
|------|------|-------|-------|-------|-------|------|------|------|-------|------|-------|------|
| 309 | 676 | 1029 | 1373 | 1782 | 2212 | 2630 | 3016 | 3390 | 3770 | 4175 | 4549 | 4944 |
| 44 | 21 | -15 | -61 | -42 | -2 | 26 | 22 | 6 | -4 | 11 | -5 | 0 |
| 0.57 | 0.28 | -0.20 | -0.79 | -0.54 | -0.03 | 0.33 | 0.28 | 0.08 | -0.05 | 0.14 | -0.06 | 0.00 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|----------|----------------|------|
| 7.33 GHz | INTERCEPT (mV) | 3452 |
| | SLOPE (mV/dB) | 77.4 |

| | | | | | | | | | | | | |
|------|------|-------|-------|-------|------|------|------|-------|-------|-------|------|------|
| 380 | 766 | 1116 | 1454 | 1885 | 2310 | 2702 | 3077 | 3449 | 3814 | 4226 | 4621 | 5011 |
| 26 | 24 | -13 | -62 | -18 | 19 | 24 | 12 | -3 | -25 | -1 | 7 | 10 |
| 0.33 | 0.31 | -0.17 | -0.80 | -0.24 | 0.25 | 0.31 | 0.15 | -0.04 | -0.33 | -0.01 | 0.09 | 0.13 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|--------|----------------|------|
| 10 GHz | INTERCEPT (mV) | 3551 |
| | SLOPE (mV/dB) | 77.0 |

| | | | | | | | | | | | | |
|------|------|-------|-------|-------|------|------|------|-------|------|------|-------|------|
| 489 | 872 | 1223 | 1567 | 2008 | 2427 | 2802 | 3168 | 3540 | 3940 | 4339 | 4670 | 5103 |
| 18 | 16 | -18 | -59 | -3 | 31 | 21 | 2 | -11 | 5 | 19 | -35 | 13 |
| 0.24 | 0.21 | -0.23 | -0.76 | -0.04 | 0.41 | 0.28 | 0.03 | -0.14 | 0.06 | 0.24 | -0.46 | 0.16 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|-----------|----------------|------|
| 12.67 GHz | INTERCEPT (mV) | 3523 |
| | SLOPE (mV/dB) | 77.6 |

| | | | | | | | | | | | | |
|------|------|-------|-------|-------|------|------|------|------|-------|-------|------|------|
| 445 | 830 | 1180 | 1517 | 1958 | 2382 | 2769 | 3136 | 3523 | 3882 | 4290 | 4709 | 5084 |
| 28 | 24 | -14 | -65 | -12 | 24 | 22 | 1 | 0 | -29 | -9 | 22 | 8 |
| 0.35 | 0.31 | -0.18 | -0.84 | -0.16 | 0.30 | 0.29 | 0.02 | 0.00 | -0.37 | -0.12 | 0.28 | 0.11 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|-----------|----------------|------|
| 15.33 GHz | INTERCEPT (mV) | 3499 |
| | SLOPE (mV/dB) | 77.7 |

| | | | | | | | | | | | | |
|------|------|-------|-------|-------|------|------|------|-------|-------|-------|------|------|
| 415 | 808 | 1159 | 1494 | 1933 | 2357 | 2744 | 3114 | 3497 | 3854 | 4265 | 4679 | 5071 |
| 23 | 27 | -10 | -63 | -13 | 23 | 22 | 3 | -2 | -33 | -11 | 15 | 19 |
| 0.29 | 0.35 | -0.13 | -0.81 | -0.16 | 0.30 | 0.28 | 0.04 | -0.03 | -0.43 | -0.14 | 0.19 | 0.24 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|--------|----------------|------|
| 18 GHz | INTERCEPT (mV) | 3398 |
| | SLOPE (mV/dB) | 75.1 |

| | | | | | | | | | | | | |
|------|------|------|-------|------|------|-------|-------|-------|-------|-------|------|------|
| 406 | 798 | 1146 | 1478 | 1912 | 2314 | 2640 | 3006 | 3363 | 3719 | 4126 | 4550 | 4956 |
| 10 | 27 | 0 | -43 | 15 | 42 | -7 | -16 | -35 | -54 | -22 | 26 | 57 |
| 0.14 | 0.36 | 0.00 | -0.58 | 0.20 | 0.56 | -0.10 | -0.22 | -0.46 | -0.72 | -0.30 | 0.35 | 0.76 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

Flatness P-P

| | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2.4 | 2.6 | 2.6 | 2.6 | 3.0 | 2.8 | 2.8 | 2.8 | 3.0 | 3.0 | 3.0 | 2.8 | 3.0 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

| | |
|------------------|------|
| Slope Avg(mv/dB) | 76.9 |
|------------------|------|



PLANAR MONOLITHICS INDUSTRIES
 4921 Robert J. Mathews Parkway, Suite 1
 El Dorado Hills, CA 95762
 Phone: 916-542-1401 Fax: 301-662-1731
 Email: sales@pmi-rf.com | www.pmi-

LOG TRANSFER WITH FREQUENCY
 MODEL: ERDLVA-218-CW-75MV
 TESTED BY: J.Merriner
 DATE: 3-30-22
 SERIAL NO: PL 35870
 Test Temp: +85C

VOS= 110MV

Frequency

| | | |
|-------|----------------|------|
| 2 GHz | INTERCEPT (mV) | 3119 |
| | SLOPE (mV/dB) | 70.4 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|-------|-------|------|------|------|------|------|-------|-------|-------|------|------|-------|
| 269 | 619 | 1020 | 1389 | 1764 | 2093 | 2415 | 2745 | 3080 | 3462 | 3846 | 4183 | 4508 |
| -34 | -36 | 13 | 30 | 53 | 30 | 0 | -22 | -39 | -9 | 23 | 8 | -19 |
| -0.48 | -0.51 | 0.19 | 0.43 | 0.75 | 0.43 | 0.00 | -0.31 | -0.55 | -0.12 | 0.33 | 0.12 | -0.27 |

RF Input Power (dBm)

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|----------|----------------|------|
| 4.67 GHz | INTERCEPT (mV) | 3157 |
| | SLOPE (mV/dB) | 73.8 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|------|-------|-------|------|------|------|------|------|------|------|------|-------|-------|
| 221 | 513 | 937 | 1316 | 1684 | 2055 | 2442 | 2824 | 3164 | 3542 | 3923 | 4261 | 4565 |
| 16 | -61 | -6 | 4 | 3 | 5 | 23 | 36 | 7 | 16 | 28 | -3 | -68 |
| 0.22 | -0.83 | -0.08 | 0.05 | 0.04 | 0.07 | 0.31 | 0.49 | 0.10 | 0.22 | 0.38 | -0.04 | -0.92 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|----------|----------------|------|
| 7.33 GHz | INTERCEPT (mV) | 3185 |
| | SLOPE (mV/dB) | 73.6 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|-------|-------|-------|------|------|------|------|------|------|------|------|-------|-------|
| 232 | 561 | 973 | 1353 | 1724 | 2090 | 2482 | 2851 | 3187 | 3553 | 3943 | 4288 | 4595 |
| -8 | -48 | -4 | 8 | 11 | 9 | 33 | 34 | 2 | 0 | 22 | -1 | -62 |
| -0.12 | -0.65 | -0.05 | 0.11 | 0.16 | 0.13 | 0.45 | 0.47 | 0.03 | 0.00 | 0.30 | -0.01 | -0.84 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|--------|----------------|------|
| 10 GHz | INTERCEPT (mV) | 3260 |
| | SLOPE (mV/dB) | 74.3 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|-------|-------|-------|------|------|------|------|------|------|------|------|------|-------|
| 263 | 632 | 1028 | 1403 | 1782 | 2149 | 2557 | 2922 | 3277 | 3649 | 4032 | 4375 | 4659 |
| -26 | -28 | -4 | 0 | 7 | 3 | 39 | 33 | 17 | 17 | 29 | 0 | -87 |
| -0.35 | -0.38 | -0.05 | 0.00 | 0.10 | 0.04 | 0.53 | 0.44 | 0.22 | 0.23 | 0.38 | 0.00 | -1.18 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|-----------|----------------|------|
| 12.67 GHz | INTERCEPT (mV) | 3248 |
| | SLOPE (mV/dB) | 74.0 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|-------|-------|------|------|------|------|------|------|------|------|------|------|-------|
| 257 | 626 | 1027 | 1403 | 1782 | 2146 | 2545 | 2908 | 3257 | 3620 | 4008 | 4361 | 4658 |
| -30 | -31 | 0 | 6 | 15 | 9 | 37 | 30 | 9 | 2 | 20 | 3 | -70 |
| -0.40 | -0.42 | 0.00 | 0.08 | 0.20 | 0.12 | 0.51 | 0.41 | 0.12 | 0.03 | 0.27 | 0.04 | -0.95 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|-----------|----------------|------|
| 15.33 GHz | INTERCEPT (mV) | 3220 |
| | SLOPE (mV/dB) | 74.7 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|-------|-------|-------|------|------|------|------|------|------|------|------|------|-------|
| 231 | 558 | 975 | 1353 | 1727 | 2100 | 2514 | 2889 | 3235 | 3595 | 3987 | 4341 | 4647 |
| -1 | -47 | -4 | 0 | 1 | 0 | 41 | 42 | 15 | 1 | 19 | 0 | -68 |
| -0.01 | -0.63 | -0.05 | 0.01 | 0.01 | 0.00 | 0.55 | 0.56 | 0.20 | 0.01 | 0.26 | 0.00 | -0.91 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

| | | |
|--------|----------------|------|
| 18 GHz | INTERCEPT (mV) | 3111 |
| | SLOPE (mV/dB) | 73.3 |

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|------|-------|-------|------|------|------|------|------|-------|-------|------|------|-------|
| 199 | 482 | 910 | 1288 | 1656 | 2027 | 2402 | 2774 | 3106 | 3462 | 3848 | 4212 | 4552 |
| 19 | -64 | -3 | 9 | 11 | 15 | 24 | 29 | -5 | -16 | 4 | 2 | -25 |
| 0.26 | -0.88 | -0.04 | 0.12 | 0.14 | 0.21 | 0.32 | 0.40 | -0.07 | -0.21 | 0.05 | 0.02 | -0.34 |

| |
|----------------------|
| Measured Value (mV) |
| Error (mV) |
| LINEARITY ERROR (dB) |

Flatness P-P

| -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 1.0 | 2.0 | 1.6 | 1.6 | 1.8 | 1.6 | 2.2 | 2.4 | 2.6 | 2.6 | 2.6 | 2.6 | 2.0 |

| | |
|------------------|------|
| Slope Avg(mv/dB) | 73.4 |
|------------------|------|


PL35890

File Trace/Chan Response Marker/Analysis Stimulus Utility Help

Trace 1

Reference Position 4.00 Div

Tr 1 S11 SWR 0.100U/ 1.00U

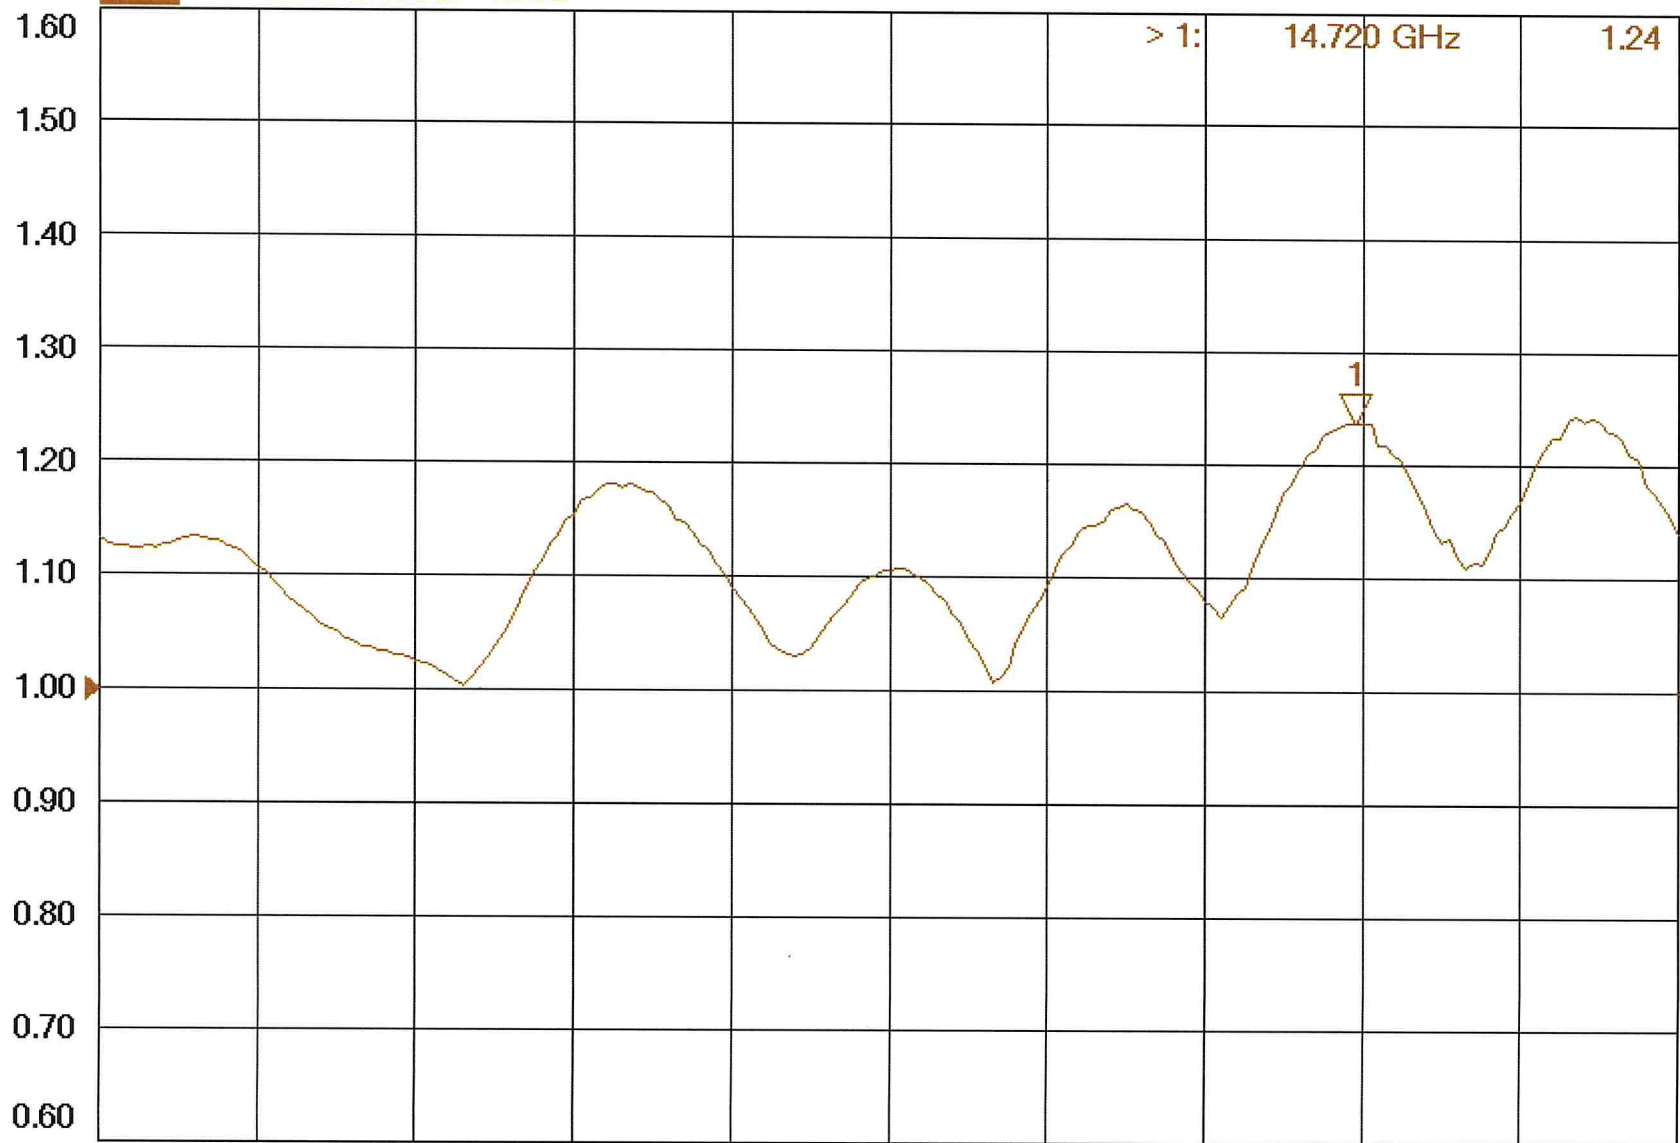

1 >Ch1: Start 2.00000 GHz — Stop 18.00000 GHz

Scale

Autoscale

Autoscale All

Scale

Reference Level

* Reference Position

Electrical Delay

Phase Offset

More ▶

Cont. CH 1: S11 C 2-Port

LCL