


Product Specification


CMIBFNF-3.3-4.2G Hybrid Band Pass Band Reject Diplexer

Electrical Specifications

Parameter	Specification	
	Band Pass	Band Reject
Input Frequency Range	2 ~ 8 GHz	
Frequency Range	3300 ~ 4200MHz	3300 ~ 4200MHz
Insertion Loss	2.5 dB Max	2 dB @ 2000 ~ 3100 MHz 4 dB @ 4500 ~ 8000 MHz
Rejection	55 dB @ DC ~ 2700 MHz 55 dB @ 5100 ~ 8000 MHz	40 dB Min
VSWR @ Common Port	2.0:1 Max	
Power	1 Watt	
Connectors	SMA (F)	
Dimensions	See Attached Drawing (All Dimensions are in Inches)	

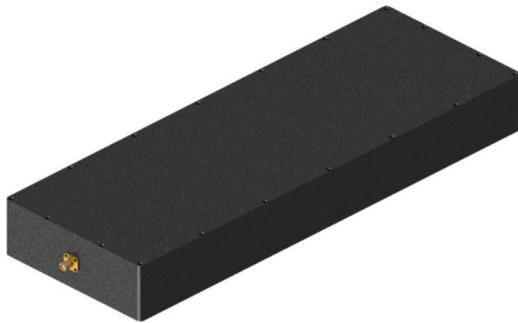

Transmission Frequency Response

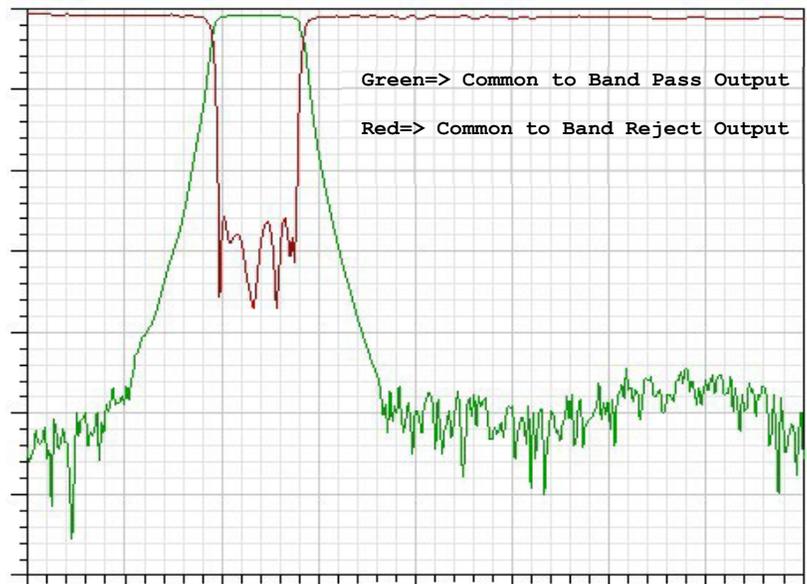

Outline Drawing

