

Product Specification


CMIF0020A-LS
Suspended Substrate Strip-Line Low Pass Filter



Parameters	Electrical Specifications
Frequency Range	DC to 2GHz
Insertion Loss	≤ 1.5dB
VSWR	≤ 1.3:1
Rejection	≥50dB @ 2.5~13GHz
Power Handling	10W
Port Connectors	SMA-Female
Surface Finish	Natural color conductive oxidation or Black Paint
Dimensions	See Attached Drawing

Features

- Wide frequency range
- High Reliability
- High “Q”
- Low Loss
- High Rejection
- Small Size

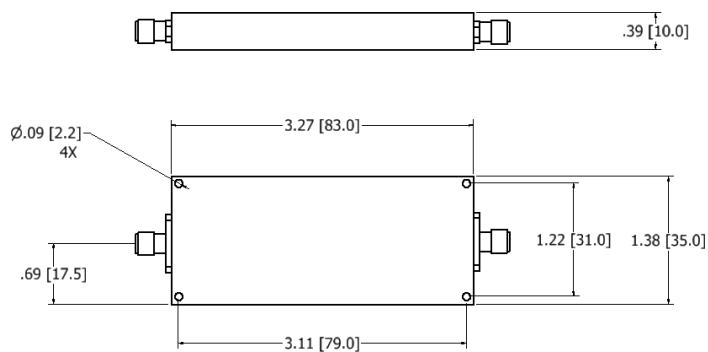

Dimensions are in Inches [mm]