

Product Specification


CMIF0060-LS
Suspended Substrate Strip-Line Low Pass Filter



Parameters	Electrical Specifications
Frequency Range	DC to 5.4GHz
Insertion Loss	≤ 1.0dB
VSWR	≤ 1.5:1
Rejection	≥45dB @ 6.9~14GHz
Power Handling	15W
Port Connectors	SMA-Female
Surface Finish	Natural color conductive oxidation or Black Paint
Dimensions	See Attached Drawing

Features

- Wide frequency range
- High Reliability
- High “Q”
- Low Loss
- High Rejection
- Small Size

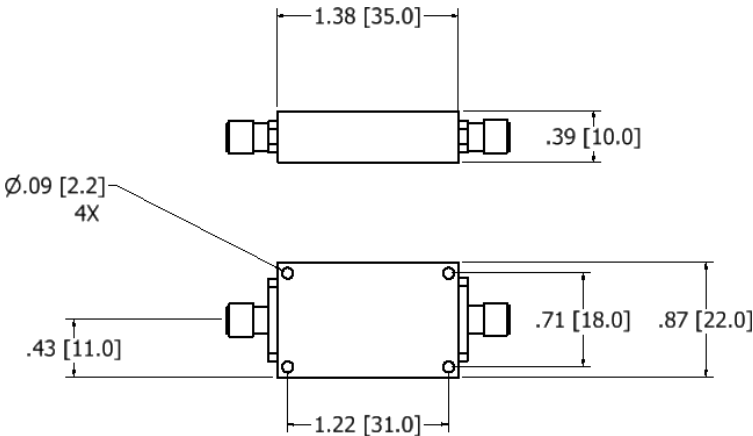

Dimensions are in Inches [mm]