

Product Specification



CMIF15130-HS
Suspended Substrate Strip-Line High Pass Filter



Parameters	Electrical Specifications
Frequency Range	1.5 to 13GHz
Insertion Loss	≤ 1.5dB
VSWR	≤ 2.0:1
Rejection	≥50dB @ DC-1GHz
Power Handling	10W
Port Connectors	SMA-Female
Surface Finish	Natural color conductive oxidation or Black Paint
Dimensions	See Attached Drawing
Mounting Hole Diameter	0.09 [2.2] Inch [mm]

Features

- Wide frequency range
- High Reliability
- High “Q”
- Low Loss
- High Rejection
- Small Size

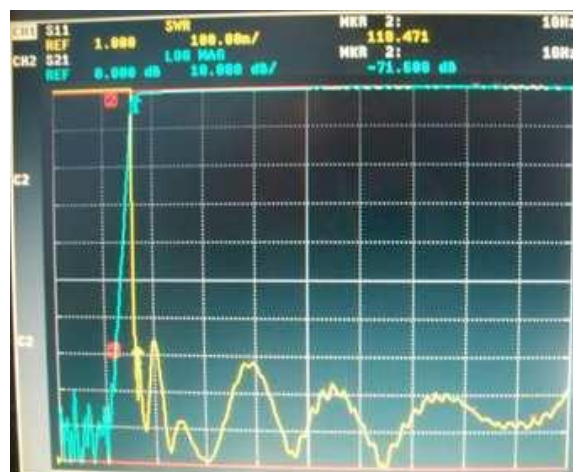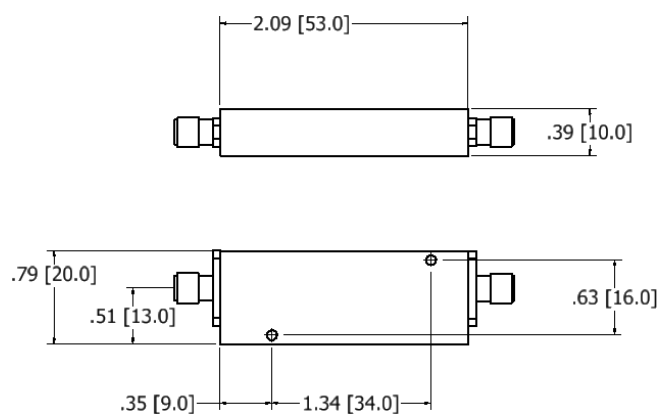

Dimensions are in Inches [mm]