


THIS IS A CAD DRAWING - DO NOT MAKE MANUAL CHANGES TO IT.
PROPERTY OF CMI - DO NOT COPY OR DISTRIBUTE WITHOUT PERMISSION.

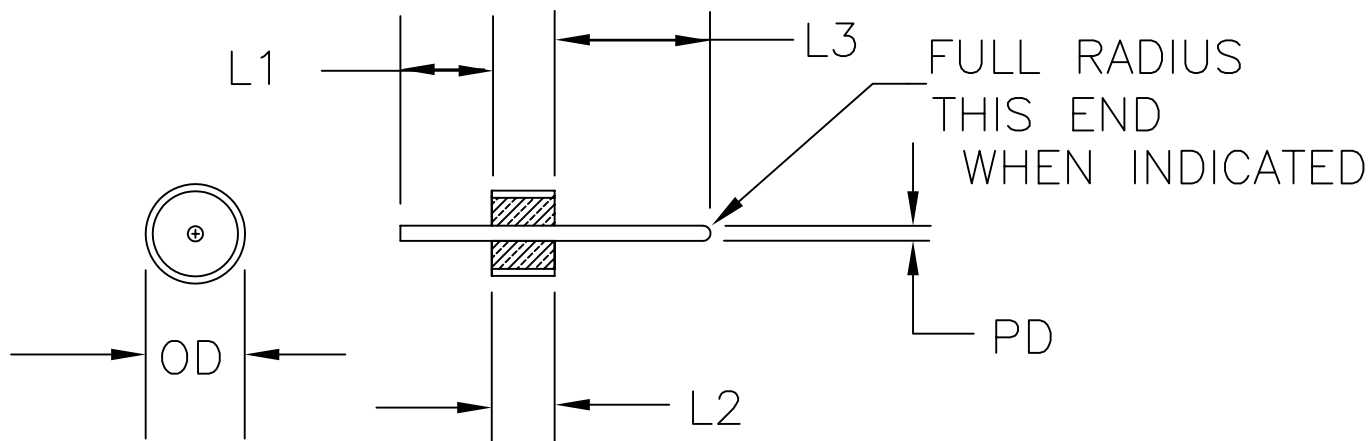

PART NUMBER	OD +/- .002	PD +/- .001	L1 +/- .007	L2 +/- .003	L3 +/- .007	GLASS	RADIUS (Y/N)
SK 2102-01							
SK 2102-02	0.098	0.015	0.073	0.062	0.143		N
SK 2102-03	0.050	0.018	0.055	0.040	0.150		N
SK 2102-04	0.050	0.018	0.025	0.040	0.075		Y
SK 2102-05	0.050	0.018	0.027	0.040	0.027		Y
SK 2102-06	0.076	0.025	0.400	0.040	0.200		N
SK 2102-07	0.076	0.012	0.033	0.055	0.080		Y
SK 2102-08	0.076	0.025	0.090	0.055	0.200		N
SK 2102-09	.098+/- .001	0.015	0.100	.063+/- .001	0.165	7052	N
SK 2102-10	0.098	0.025	0.098	0.0625	0.120	7052	N

NOTES:

1. MATERIAL: BUSHING — KOVAR
LEAD — KOVAR
2. GLASS: CORNING 7070 OR EQUIVALENT.
3. PLATING: GOLD PER MIL-G-45204, TYPE III, GRADE A,
CLASS 2, OVER 150 μINCH OF NICKEL.
4. IMPEDANCE: 50 ± 2 OHMS.
5. UPPER OPERATING FREQUENCY: 50GHz.
6. HERMETICITY: FINE LEAKAGE RATE SHALL NOT EXCEED
 1×10^{-8} cc/SEC. PER MIL-STD-202, METHOD 112C.

[illegible]