

## Frequency Quadrupler, Model E-4X

### Description:

Spacek Labs' passive frequency quadrupler, Model E-4X, has an input frequency range of 17.5 to 20 GHz generating an output frequency range of 70 to 80 GHz. This is a cost-effective frequency multiplier with similar models available from 18 to 110 GHz in complete waveguide output bandwidths from K-band to W-band. All designs are a balanced configuration to suppress undesired harmonics and are unconditionally stable for any input/output VSWR. To meet your needs, features can be added such as coaxial output adapters and additional filtering. MIL-spec or space-qualified units available.

### Features:


- Balanced Circuitry
- Unconditionally Stable
- Coaxial input, waveguide output, and filtering options available
- MIL-spec or space-qualified units available

### Electrical Specifications:

Description	Min.	Typ.	Max.
Input Frequency Range	17.5 GHz	-	20 GHz
Input Power Level	-	+15 dBm	-
Output Frequency Range	70 GHz	-	80 GHz
Conversion Loss	-	-	22.0 dB

### Mechanical Specifications:

Description	Specification
Connectors I/O	SMA(F) / WR-12
Dimensions OA	See outline
Material	Brass
Finish	Gold-plate
Weight	2.0 oz

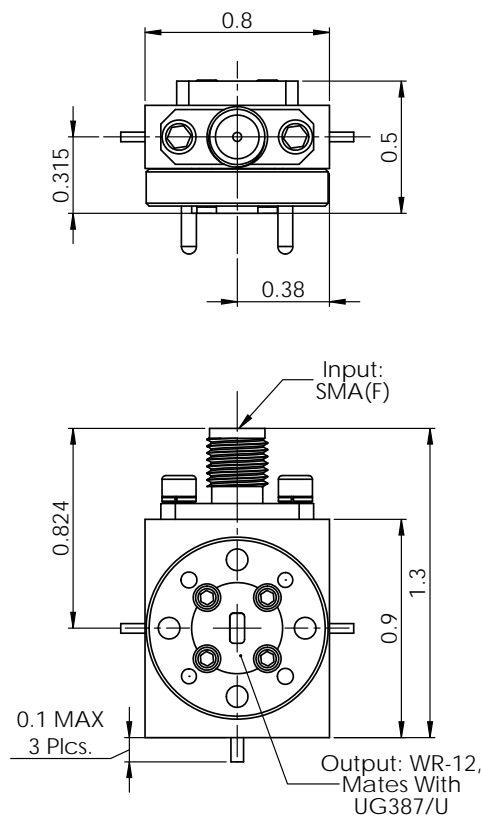

**OUTLINE:** Dimensions in inches (Not to scale)

PASSIVE FREQUENCY MULTIPLIER