

Frequency Tripler, Model KKa-3X

Description:

Spacek Labs' passive frequency tripler, Model KKa-3X, has an input frequency range of 6 to 13.3 GHz generating an output frequency range of 18 to 40 GHz. This is a cost-effective frequency multiplier with similar models available from 18 to 110 GHz in complete waveguide output bandwidths from K-band to W-band. All designs are a balanced configuration to suppress undesired harmonics and are unconditionally stable for any input/output VSWR. To meet your needs, features can be added such as coaxial output adapters and additional filtering. MIL-spec or space-qualified units available.

Features:

- Balanced Circuitry
- Unconditionally Stable
- Coaxial input, waveguide output, and filtering options available
- MIL-spec or space-qualified units available

Electrical Specifications:


Description	Min.	Typ.	Max.
Input Frequency Range	6 GHz	-	13.3 GHz
Input Power Level	-	+17 dBm	-
Output Frequency Range	18 GHz	-	40 GHz
Conversion Loss	-	-	17.0 dB

Mechanical Specifications:

Description	Specification
Connectors I/O	SMA(F) / WRD-180
Dimensions OA	See outline
Material	Brass
Finish	Gold-plate
Weight	1.5 oz



Pictured with waveguide to coaxial transition

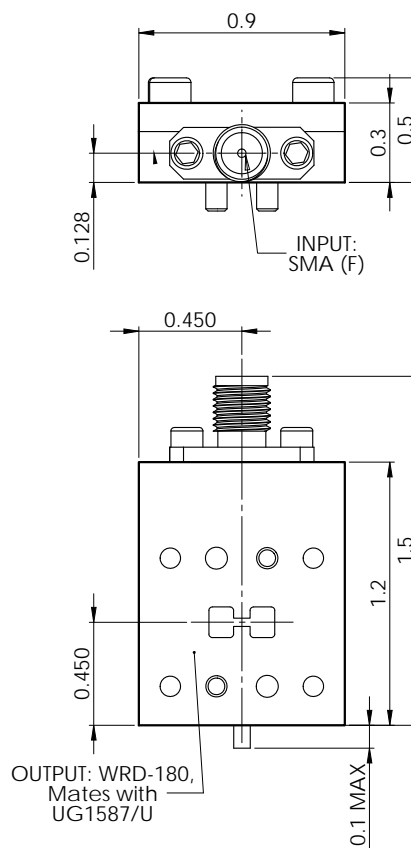

OUTLINE: Dimensions in inches (Not to scale)

PASSIVE FREQUENCY MULTIPLIER