



Features and Benefits

Frequency range: 120MHz

Supply voltage: 5.0V

Steady current: 40mA Max

Output waveform: Sinewave

Frequency stability vs. operating temperature: ± 0.28 PPM

Operating temperature: -40°C to $+85^{\circ}\text{C}$

Size: 14.3x9.6x6.5mm

Typical Applications

SATCOM System

Cellular Base Stations


Radar Applications

Description

TCXO1490BM-STR3-120MHz-A is designed for applications where exceptional frequency stability and timing is required. It has both excellent temperature performance and short-term stability. These characteristics make it an excellent choice for timing applications.

Mechanical Drawing & Pin Connections

Drawing No: MD230027-1

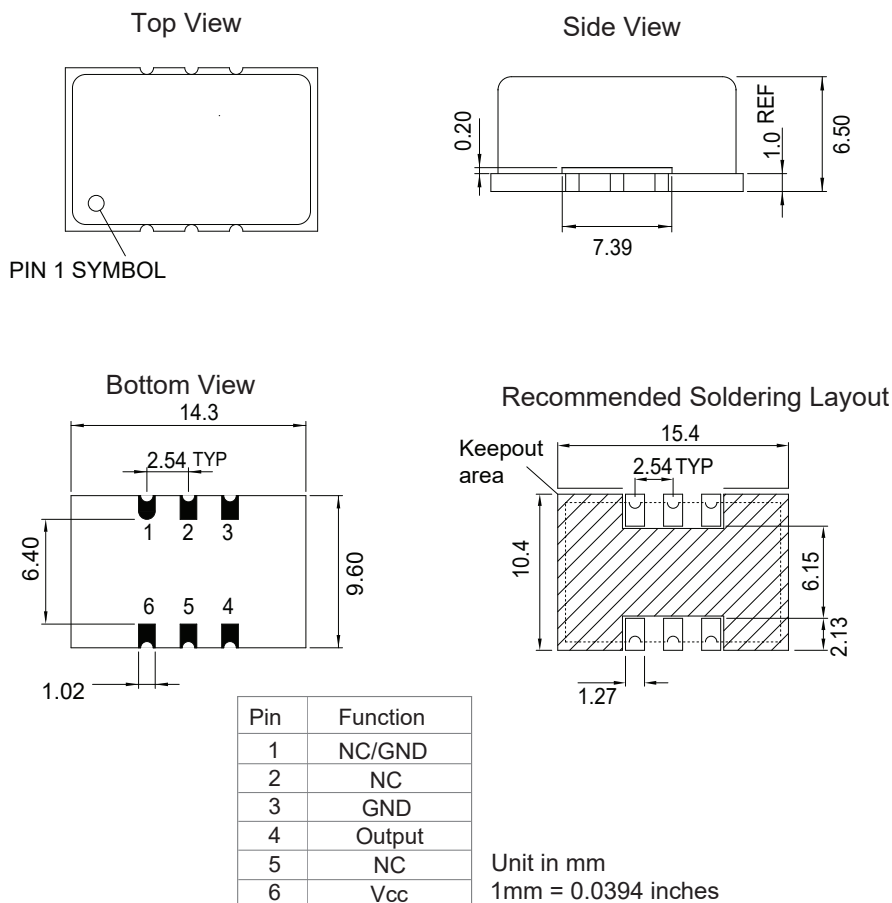



Specifications

| Oscillator Specification | Sym | Condition | Value | | | Unit | Note |
|---|------------------|---|----------|------|-------|------|--|
| | | | Min. | Typ. | Max. | | |
| Operational Frequency | F _{nom} | | | 120 | | MHz | |
| RF Output | | | | | | | |
| Signal Waveform | | | Sinewave | | | | |
| Load | R _L | | | 50 | | ohm | |
| Output power | | | 10 | | | dBm | |
| Power Supply | | | | | | | |
| Supply Voltage | V _{cc} | | 4.75 | 5 | 5.25 | V | |
| Current | | At maximum supply voltage | | | 40 | mA | |
| Frequency Stability | | | | | | | |
| Frequency stability (Overall) | | Includes of frequency tolerance@25°C and frequency stability versus operating temperature range and voltage variance and IR reflow and output load variation and 20 years aging | -4.6 | | +4.6 | ppm | |
| Versus Operating Temperature Range | | -40°C to +85°C | -0.28 | | +0.28 | ppm | Referenced to the midpoint between minimum and maximum frequency value |
| Nominal Frequency Tolerance | | Frequency at 25°C ,before reflow. | -0.5 | | +0.5 | ppm | |
| Versus supply voltage | | ±5% change | -0.05 | | +0.05 | ppm | |
| Versus load | | ±10% change | -0.05 | | +0.05 | ppm | |
| Holdover stability | | Including 24 hours aging, supply voltage 3.3+-5% and frequency stability over temperature, load change +-5% | -0.37 | | +0.37 | ppm | |
| Aging | | 24 hours at 25°C | -4 | | +4 | ppb | |
| | | First year at 25°C | -0.8 | | +0.8 | ppm | |
| | | 20 years at 25°C | -2.5 | | +2.5 | ppm | |
| SSB Phase noise | | 10Hz | | -85 | | dBc | |
| | | 100Hz | | -116 | | dBc | |
| | | 1kHz | | -144 | | dBc | |
| | | 10kHz | | -155 | | dBc | |
| SSB Phase noise | | 100kHz | | -158 | | dBc | |
| Environmental, Mechanical Conditions | | | | | | | |
| Operating temperature range | | -40°C to +85°C | | | | | |
| Thermal Shock | | MIL-STD-883 1010 Condition B, JESD22-A104 Condition B under -55°C, 125°C; soak time is 10 mins, with total 200 cycles | | | | | |
| Vibration Test | | MIL-STD-883 2007 Condition A, JESD22-B103 Condition 1 under 10~2000Hz, 1.52mm, 20G, each axis for 4hrs | | | | | |
| Mechanical Shock | | MIL-STD-883 2002 Condition B, JESD22-B104 Condition B under 1500G, half-sine, 0.5ms, each axis for 3 times | | | | | |