

**SUMMARY TEST DATA
ON
APD-2-500M2G-SFF-30W**

Customer: _____
 SO No: _____
 Model No: APD-2-500M2G-SFF-30W
 Serial No: 44440
 Part No: _____

Tested By: K Craven
 Temperature: +25°C
 Date: 7/22/2024
 Drawing No: 27648020 Rev: A1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.5 to 2 GHz	0.5 to 2 GHz	PMI QA2	
2	Insertion Loss:	≤0.5 dB	0.3 dB See Plot		
3	VSWR:	Input 1.25:1 Max Output 1.20:1 Max	1.17:1 1.1:1 See Plot		
4	Isolation:	20 dB Min.	23.49 dB See Plot		
5	Amplitude Balance:	≤±0.2 dB	0 dB Max 0 dB Min See Plot		
6	Phase Balance:	≤±2°	0° Max -0.1° Min See Plot		PMI QA2

QA/QC Approval:   PMI
QA2

Date: 7/24/2024

SUMMARY TEST DATA
ON
APD-2-500M2G-SFF-30W

44440

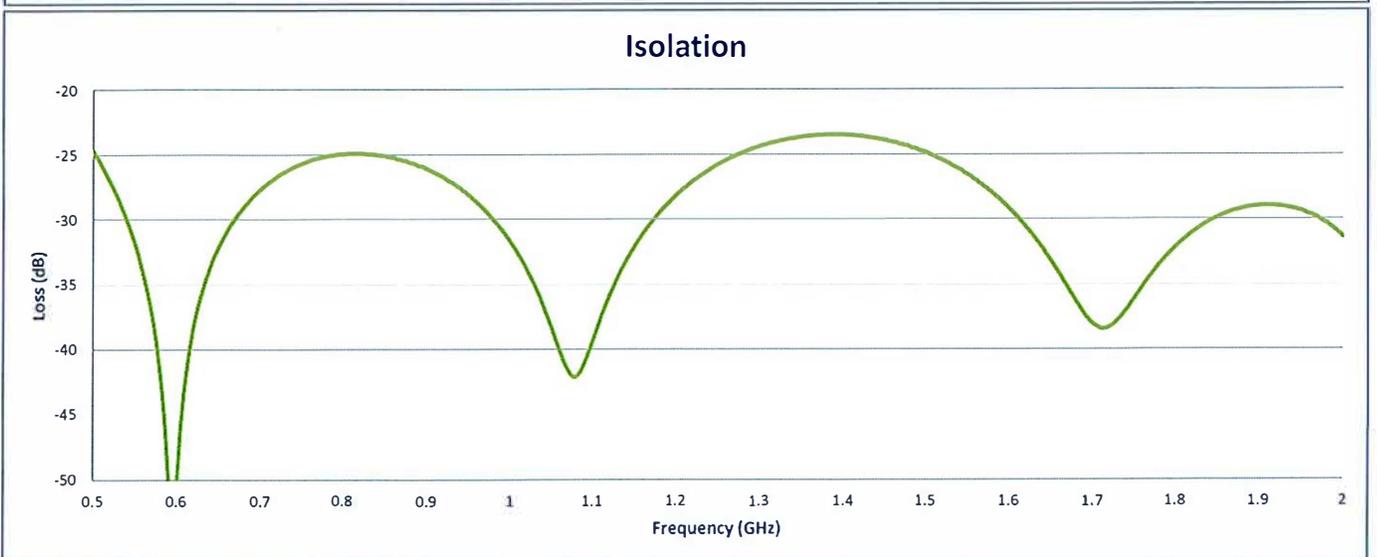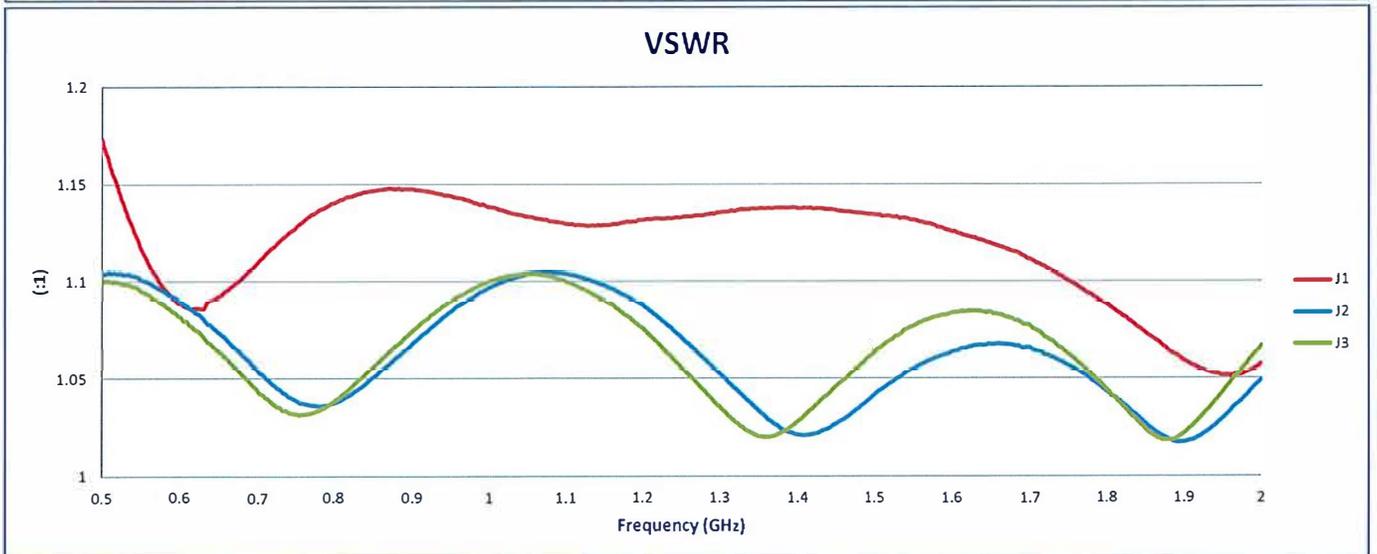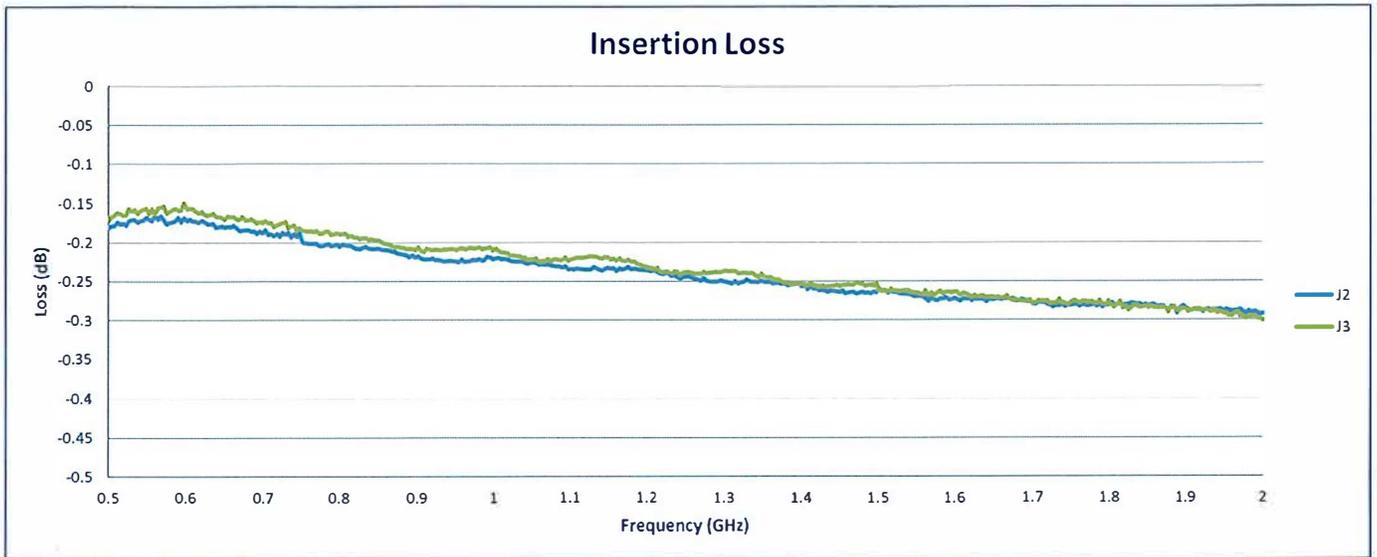

SUMMARY TEST DATA
ON
APD-2-500M2G-SFF-30W

44440

