



**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

Customer: \_\_\_\_\_ Tested By: H. HOLVICK  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: POB-16-48-22-LCA Date: 01/12/15  
Serial No: PL16364/1502 Drawing No: POB-16-48-22-LCA Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	4.0 to 8.0 GHz	4.0 to 8.0 GHz See Plot	
2	Gain:	+16 dB Typ.	17.6 dB Avg. See Plot	
3	Gain Flatness:	±1.0 dB Typ.	+/-0.10 dB See Plot	
4	Noise Figure:	3.0 dB Typ.	3.1 dB Max.	
5	OP1dB:	+20dBm Min. +22dBm Typ.	+21.5 dBm Min.	
6	VSWR Input: VSWR Output:	2.0:1 Typ 2.0:1 Typ	1.54:1 1.28:1 See Plot	
7	DC Supply:	+12VDC @ 225mA Typ.	+12VDC @ 152 mA	

QA/QC Approval: \_\_\_\_\_


Date: \_\_\_\_\_



**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

Model Number: POB-16-48-22-LCA  
Serial Number: PL16364

Temperature: +25C

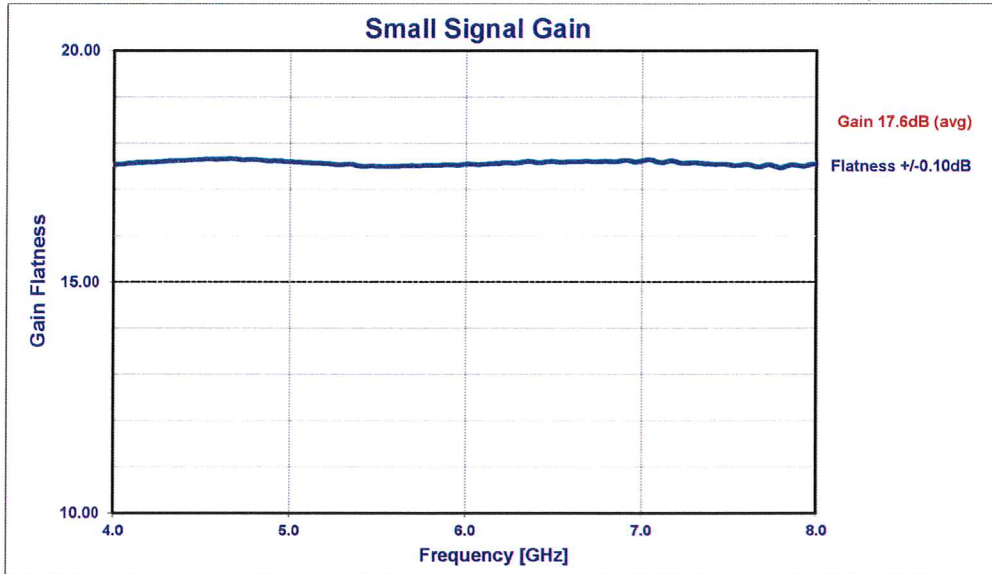



**SUMMARY TEST DATA  
ON  
POB-16-48-22-LCA**

Model Number: POB-16-48-22-LCA  
Serial Number: PL16364

Temperature: +25C

