


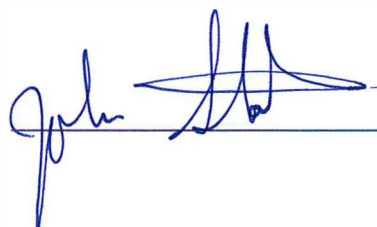

**SUMMARY TEST DATA
ON
POB-16-48-22-LCA**

Customer: _____ Tested By: H. HOLVICK
SO No: _____ Temperature: +25°C
Model No: POB-16-48-22-LCA Date: 01/12/15
Serial No: PL16366/1502 Drawing No: POB-16-48-22-LCA Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	4.0 to 8.0 GHz	4.0 to 8.0 GHz See Plot	
2	Gain:	+16 dB Typ.	17.8 dB Avg. See Plot	
3	Gain Flatness:	±1.0 dB Typ.	+/-0.09 dB See Plot	
4	Noise Figure:	3.0 dB Typ.	3.1 dB Max.	
5	OP1dB:	+20dBm Min. +22dBm Typ.	+21.2 dBm Min.	
6	VSWR Input: VSWR Output:	2.0:1 Typ 2.0:1 Typ	1.62:1 1.30:1 See Plot	
7	DC Supply:	+12VDC @ 225mA Typ.	+12VDC @ 144 mA	


QA/QC Approval:  _____ Date: 1/12/15



**SUMMARY TEST DATA
ON
POB-16-48-22-LCA**

Model Number: POB-16-48-22-LCA
Serial Number: PL16366

Temperature: +25C

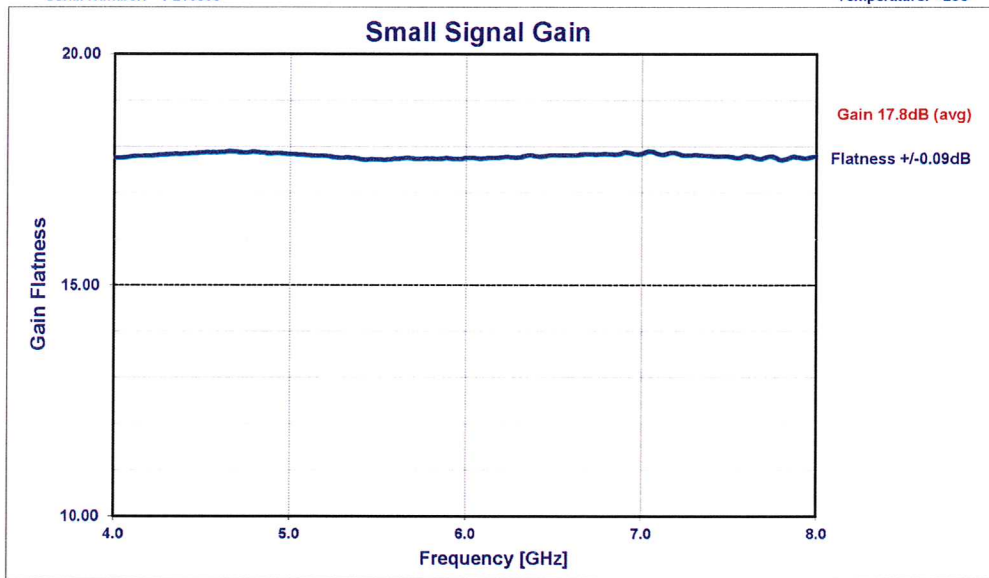



**SUMMARY TEST DATA
ON
POB-16-48-22-LCA**

Model Number: POB-16-48-22-LCA
Serial Number: PL16366

Temperature: +25C

