



**SUMMARY TEST DATA  
ON  
P1T-500M18G-80-R-SFF-SW21841A**

PL20654/1710

Customer: \_\_\_\_\_ Tested By: Jerry N.  
 SO No: \_\_\_\_\_ Temperature: +25°C  
 Model No: P1T-500M18G-80-R-SFF-SW21841A Date: 1/30/19  
 Serial No: PL20654/1710 Drawing No: 27629121 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.5 TO 18.0 GHz	0.5 TO 18.0 GHz	
2	Isolation	45 dB Min (0.5 to 1.0 GHz) 70 dB Min (1.0 to 2.0 GHz) 85 dB Min (2.0 to 12.4 GHz) 80 dB Min (12.4 to 18.0 GHz)	1.0 GHz -93.62 dB 2.0 GHz -97.49 dB 12.4 GHz -91.06 dB 18.0 GHz -81.90 dB (See Plot)	
3	Insertion Loss	1.0 dB Max (0.5 to 2.0 GHz) 1.2 dB Max (2.0 to 4.0 GHz) 1.5 dB Max (4.0 to 8.0 GHz) 2.0 dB Max (8.0 to 12.4 GHz) 2.5 dB Max (12.4 to 18.0 GHz)	2.0 GHz -0.60 dB 4.0 GHz 1.19 dB 8.0 GHz -1.21 dB 12.4 GHz -1.47 dB 18.0 GHz -2.06 dB (See Plot)	
4	VSWR IN/OUT "On Position"	1.4:1 Max (0.5 to 4.0 GHz) 1.6:1 Max (4.0 to 8.0 GHz) 1.9:1 Max (8.0 to 18.0 GHz)	Input VSWR 4.0 GHz 1.26:1 8.0 GHz 1.36:1 18.0 GHz 1.58:1 Output VSWR 4.0 GHz 1.31:1 8.0 GHz 1.27:1 18.0 GHz 1.65:1 (See Plot)	
5	Input Power	2W Average 10W Peak @ 1 µsec PW	Pass	
6	Rise / Fall Time (10% to 90% RF & 90% to 10% RF)	2 ns Max	2 ns See Typical Characteristics	
7	Delay On / Off (50% to 10% / 90% RF)	20 ns Max	19.6 ns See Typical Characteristics	
8	DC Supply	+15VDC @ 100 mA Typ -15VDC @ 45 mA Typ	40 mA 29 mA	
9	Control Signal	TTL COMPATIBLE 0 "ISOLATION" 1 "INSERTION LOSS"	Pass	


QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_



**SUMMARY TEST DATA  
ON  
P1T-500M18G-80-R-SFF-SW21841A**

PL20654/1710

**(J1 – J2) Insertion Loss and Return Loss**

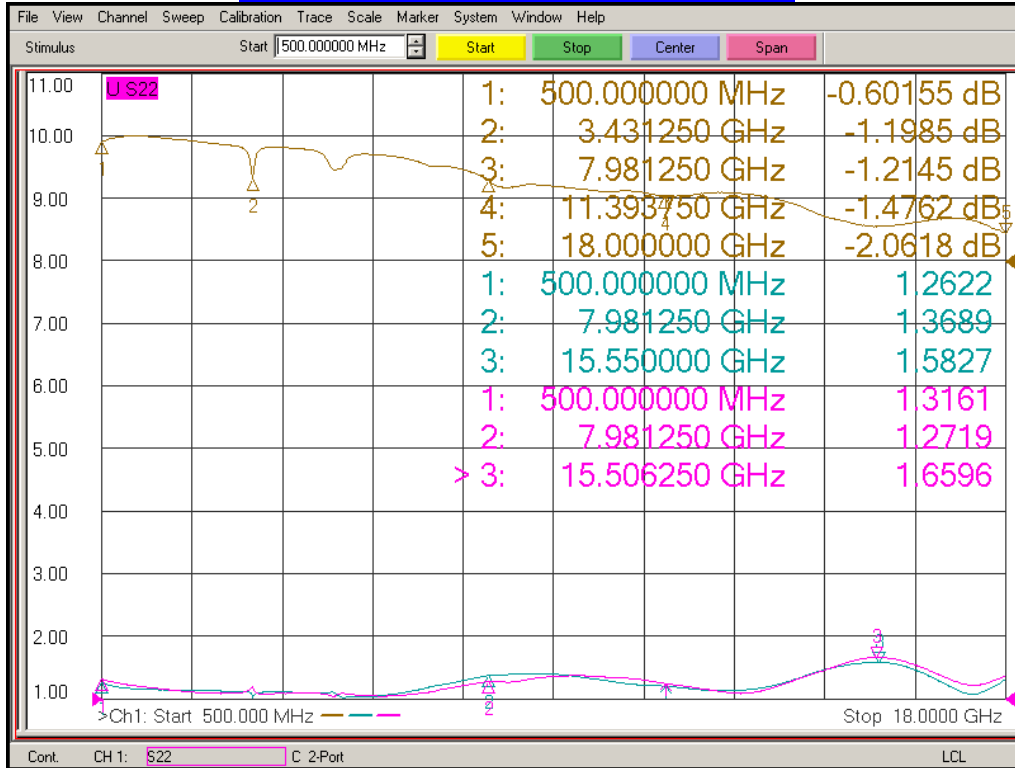

**(J1 – J2) Isolation**

