



**SUMMARY TEST DATA  
ON  
P1T-6G12G-80-T-SFF-1W**

PL23884/1845

Customer: \_\_\_\_\_ Tested By: Jerry N.  
SO No: \_\_\_\_\_ Temperature: +25°C  
Model No: P1T-6G12G-80-T-SFF-1W Date: 11/11/18  
Serial No: PL23884/1845 Drawing No: 27633390 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	6.0 to 12.0 GHz	6.0 to 12.0 GHz	
2	Insertion Loss:	1.75dB Max	1.70 dB (See Plot)	
3	Isolation:	80dB Min	91.19 dB (See Plot)	
4	VSWR:	2.0:1 Max (1.5:1 Goal)	1.94 :1	
5	Switching Speed:	25ns Typ	23.8 ns See Typical Characteristics	
6	Operating Power:	+30dBm Max	Pass	
7	Control	TTL Logic "0" = Insertion Loss "1" = Isolation	Pass	
8	Power Supply:	+5VDC @ 50mA Max -15VDC @ 75mA Max	35 mA 45 mA	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)



**SUMMARY TEST DATA  
ON  
P1T-6G12G-80-T-SFF-1W**

PL23884/1845

**(J1-J2) Insertion Loss and Return Loss**

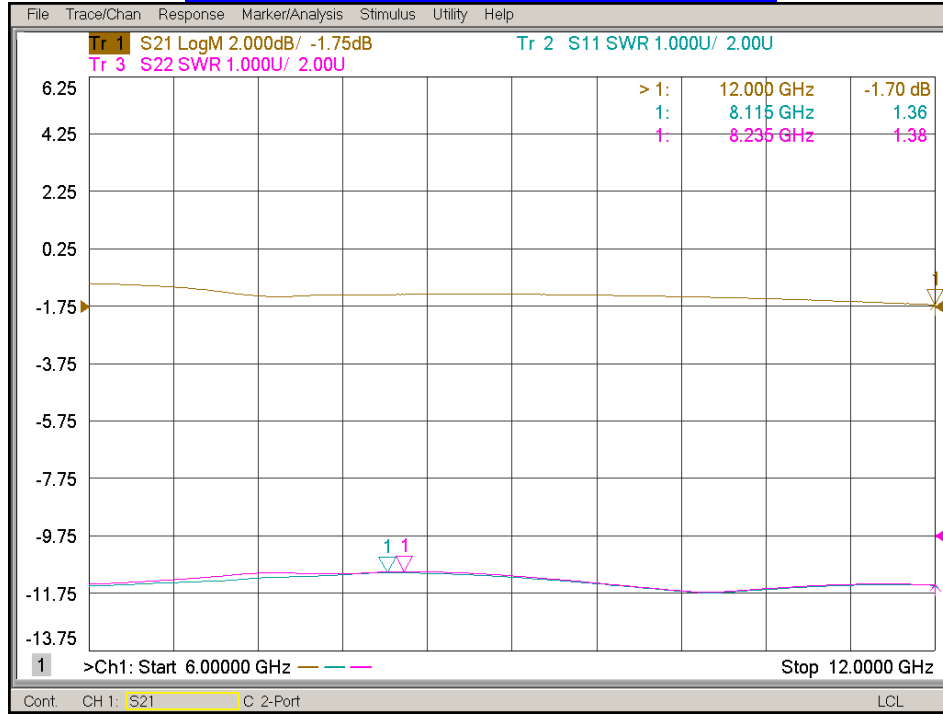

**(J1 - J2) Isolation**

