



**SUMMARY TEST DATA
ON
P1T-DC40G-65-T-292FF-1NS**

PL24103/1851

Customer: _____ Tested By: A. Lopez
SO No: _____ Temperature: +25°C
Model No: P1T-DC40G-65-T-292FF-1NS Date: 12/21/18
Serial No: PL24103/1851 Drawing No: 26921858 Rev: A2

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	DC to 40GHz	DC to 40GHz (See Plot)	PMI QA 1	
2	Isolation:	65dB Typ, 55dB Min	67.87 dB (See Plot)		
3	Insertion Loss:	5.5dB Typ, 6.8dB Max	6.62dB (See Plot)		
4	VSWR In/Out:	2.0:1 Typ, 2.2:1 Max	2.19:1 See Plot		
5	Input Power:	+17dBm CW Max	Pass		
6	Switching Speed:	5ns Typ, 6ns Max	Pass (See Typical Characteristics)		
7	Rise/Fall Time:	0.9ns Typ, 1.0ns Max	Pass (See Typical Characteristics)		
8	Control Signal:	TTL "1" On	Pass		
9	DC Voltage:	+8 to +15V @ 15mA Max -8 to -15V @ 40mA Max	+8 to +15V @ 8mA -8 to -15V @ 27mA		PMI QA 1

QA/QC Approval: _____

PMI
QA 1

Date: _____

12/22/18


7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
P1T-DC40G-65-T-292FF-1NS**

PL24103/1851

(J1-J2) Insertion Loss and Return Loss

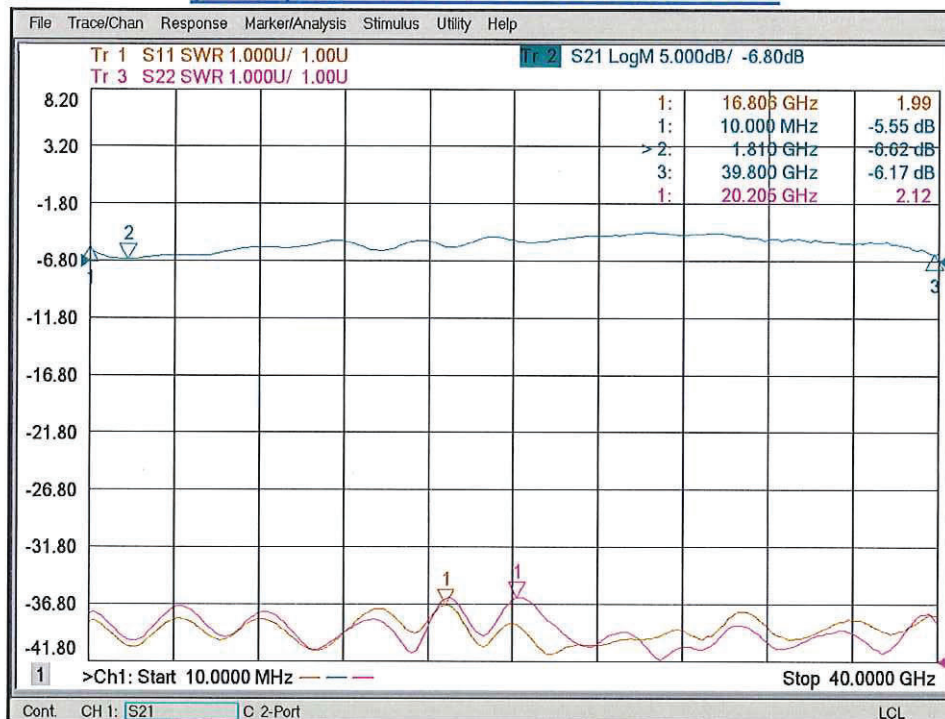

(J1 - J2) Isolation and Termination Return Loss

