



**SUMMARY TEST DATA
ON
SWN-1170-4DT-SP**

Customer : _____
 Job No : _____
 Model No : SWN-1170-4DT-SP
 Serial No : PL7700

Tested By : Hugo Gonzales
 Temperature : +25°C
 Date : 07/09/10


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	PASS/FAIL	QA/QC
1	Frequency Range:	0.5 – 18 GHz	0.5 – 18 GHz	
2	Insertion Loss:	3.75 dB Typical	See Plot	
3	Isolation:	70 dB Min.	See Plot	
4	VSWR:	2.0:1 Max.	See Plot	
5	Switching Speed:	100 nS Max.	Pass See Typical Characteristics	
6	Input Power:	+10 dBm CW Max.	Pass	
7	DC Supply:	+5VDC @ 200 mA -5VDC @ 100 mA	+5 VDC @ 113mA -5 VDC @ 82mA	
8	Control Signal:	TTL "0" → (On) TTL "1" → (Off)	Pass	

Production Manager Approval: _____ Date: _____

QA/QC Approval: _____ Date: _____




Insertion Loss and Return Loss (J1 – J3)

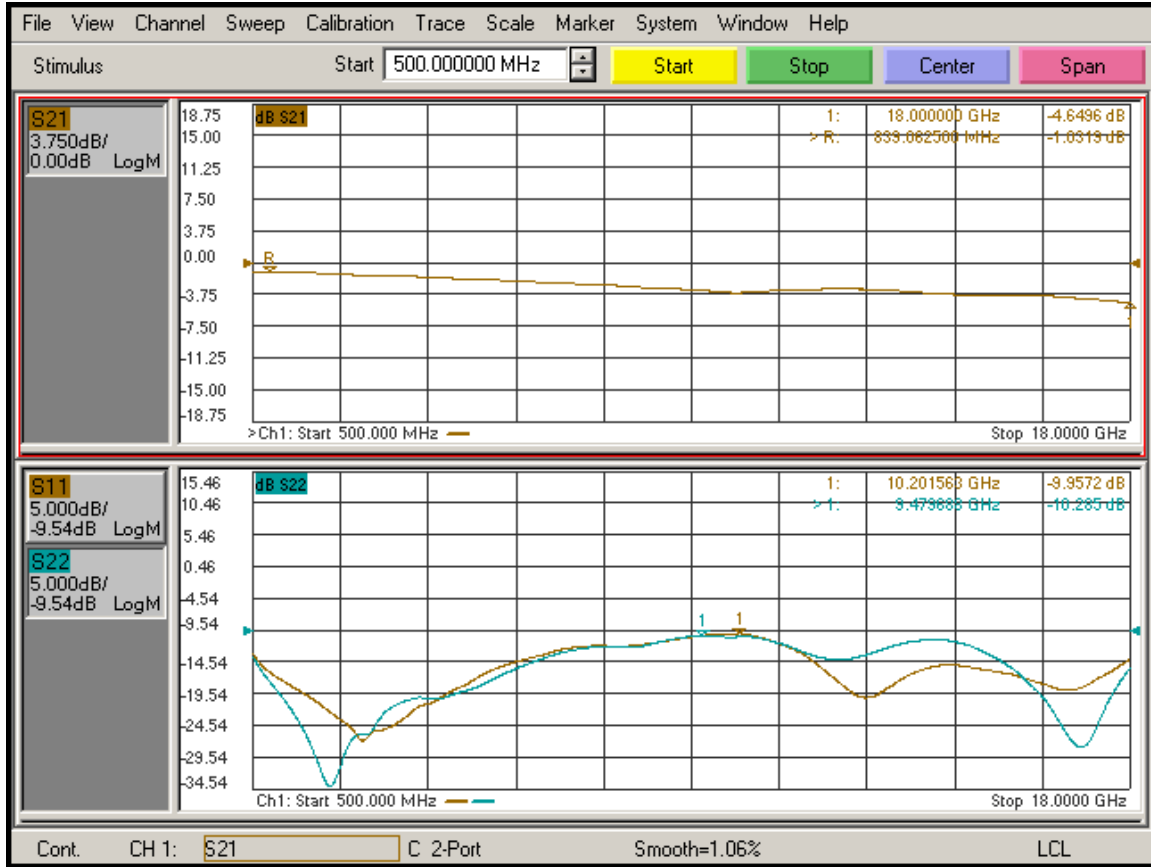




Insertion Loss and Return Loss (J1 - J4)

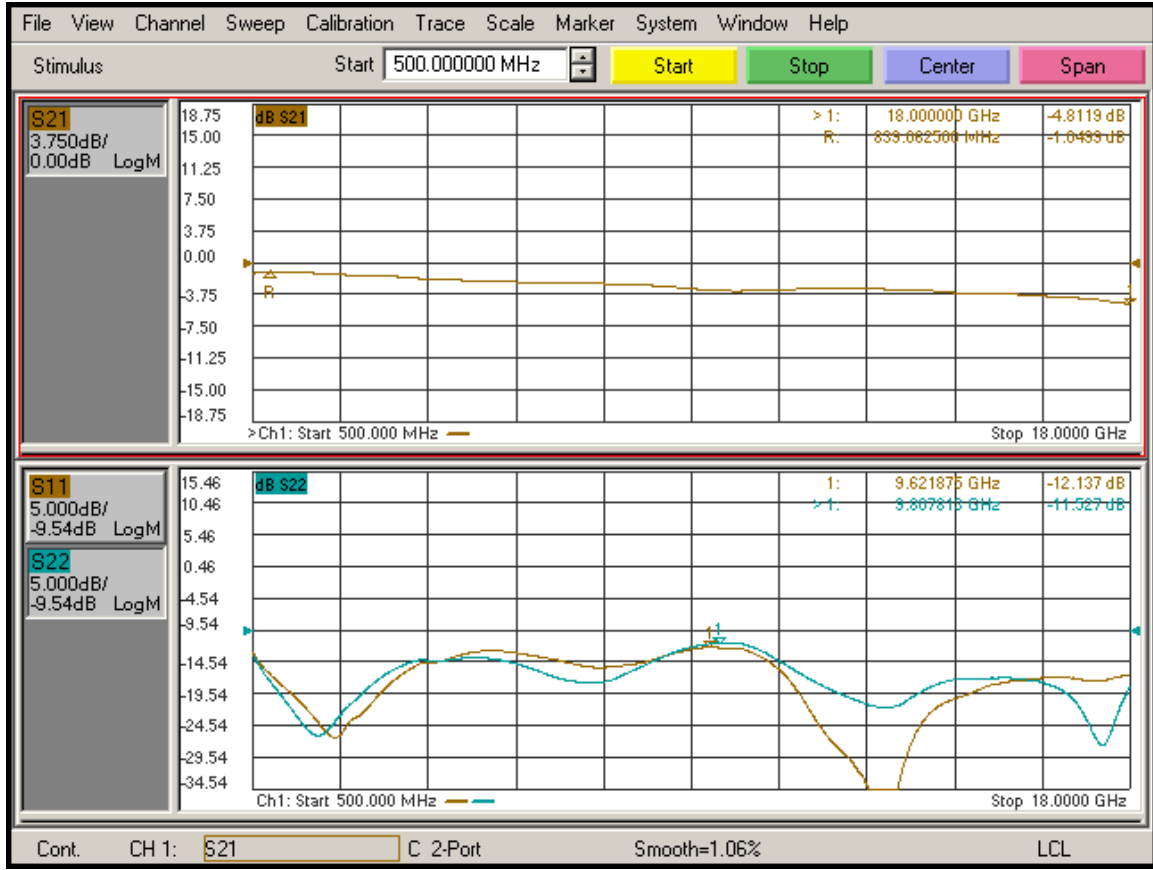




Insertion Loss and Return Loss (J1 - J6)

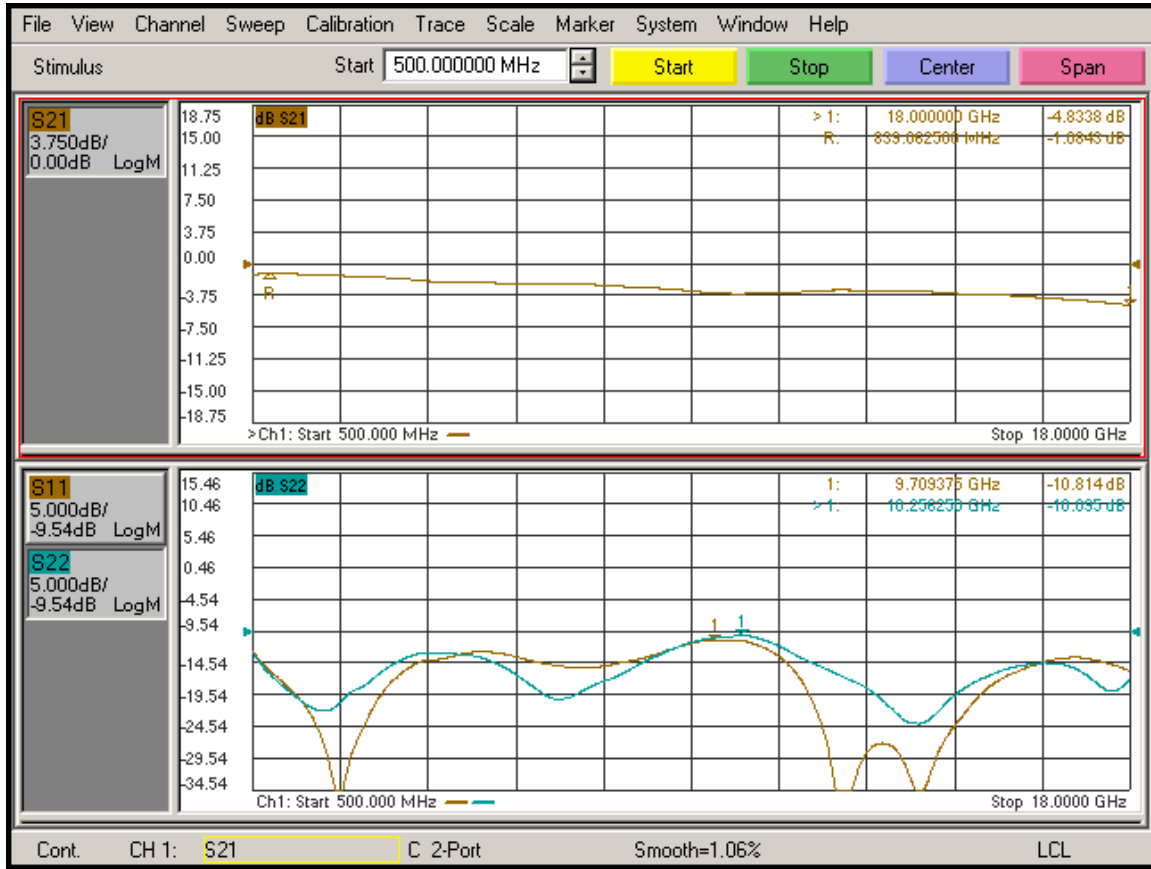



Insertion Loss and Return Loss (J1 – J7)

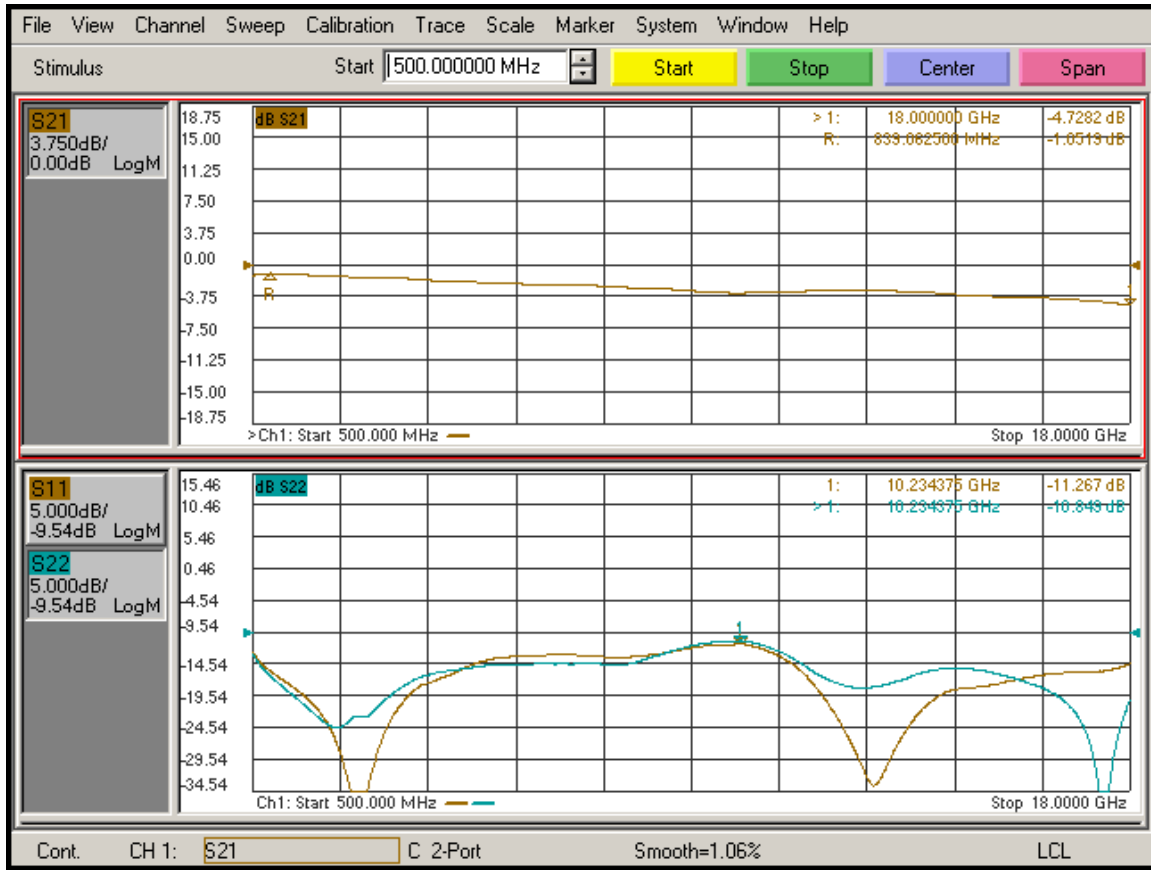



Isolation (J1 – J7); With (J1 – J3) ON

