



Electrical Specifications



Center Frequency (F_o)	10.000 MHz
Passband Width @ -3 dB	1.5 KHz min
Ripple	1.0 dB max
Insertion Loss	4.0 dB max
Stopband Width@ -60 dB	+/- 6 KHz max
Ultimate Attenuation	70 dB min
Spurs	60dB min
Input Level	0dBm
Impedance $Z_{in} = Z_{out}$	50 Ohms

Operating Temperature

-40°C to +85°C

Mechanical Drawing & Pin Connections

Drawing No : MD220036-1

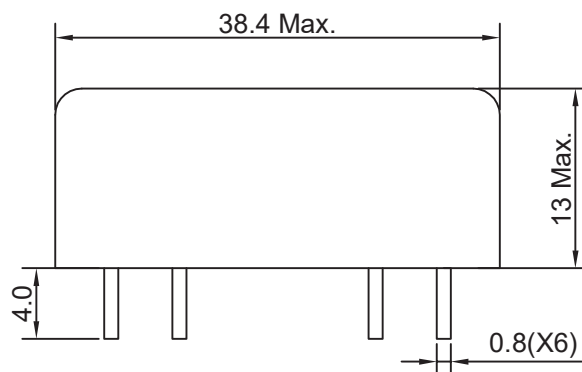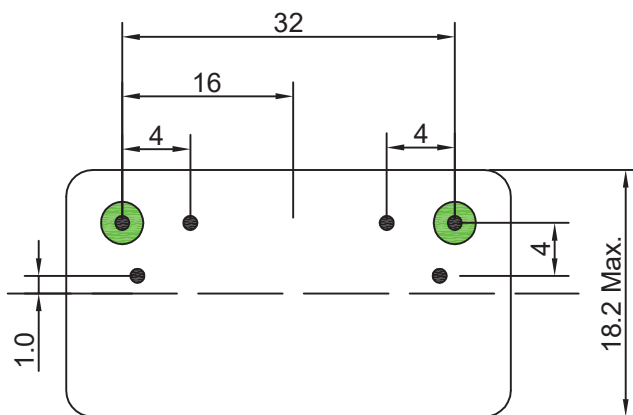

Unit in mm
1mm = 0.0394 inches