



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

DEI5865-10.7MHz

10.7MHz Crystal Filter

Electrical Specifications


| | |
|-------------------------|-----------------|
| Center Frequency (Fo) | 10.7 MHz |
| Passband Width @ -3 dB | +/- 100 KHz min |
| Ripple | 2.0 dB max |
| Insertion Loss | 4.0 dB max |
| Stopband With @ - 60 dB | +/- 300 KHz max |
| Input Power | 0dBm max |
| Spurious | 40dB mim |
| Impedance Zin = Zout | 50 Ohms |

Operating Temperature

-30°C to +70°C

Mechanical Drawing & Pin Connections

Drawing No : MD230018-2

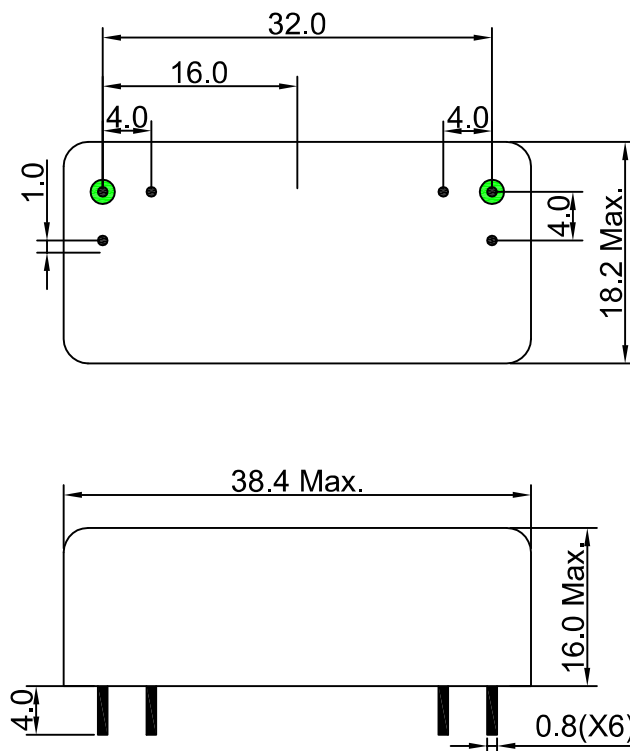

Unit in mm
1mm = 0.0394 inches