



**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-55-SFF-1**

PL25420/1916

Customer: _____ Tested By: L. McGraw
SO No: _____ Temperature: +25°C
Model No: P2T-500M18G-80-T-55-SFF-1 Date: 04/17/19
Serial No: PL25420/1916 Drawing No: 27624509 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	0.5 to 18.0 GHz	0.5 to 18.0 GHz See Plot	PMI QA1
2	Insertion Loss:	3.5 dB Max	3.3dB See Plot	
3	Isolation:	80 dB Typ	85dB See Plot	
4	VSWR:	2:1 Max	1.9:1 See Plot	
5	Switching Speed:	50% TTL to 10%/90% RF 25ns Typ	37 ns See Typical Characteristics	
6	Input Power:	+20 dBm CW	Pass	
7	Survival Power:	+23 dBm CW	Pass	
8	Control:	TLL LOGIC "0" = J1-J2 ON TLL LOGIC "1" = J1-J3 ON	Pass	
9	Power Supply:	+5V @ 65 mA Max -5V @ 50 mA Max	+5V @ 44 mA -5V @ 33 mA	PMI QA1

QA/QC Approval: _____

PMI
QA1

Date: _____


4/17/19




**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-55-SFF-1**

PL25420/1916

(J1 – J2) Insertion Loss and Return Loss

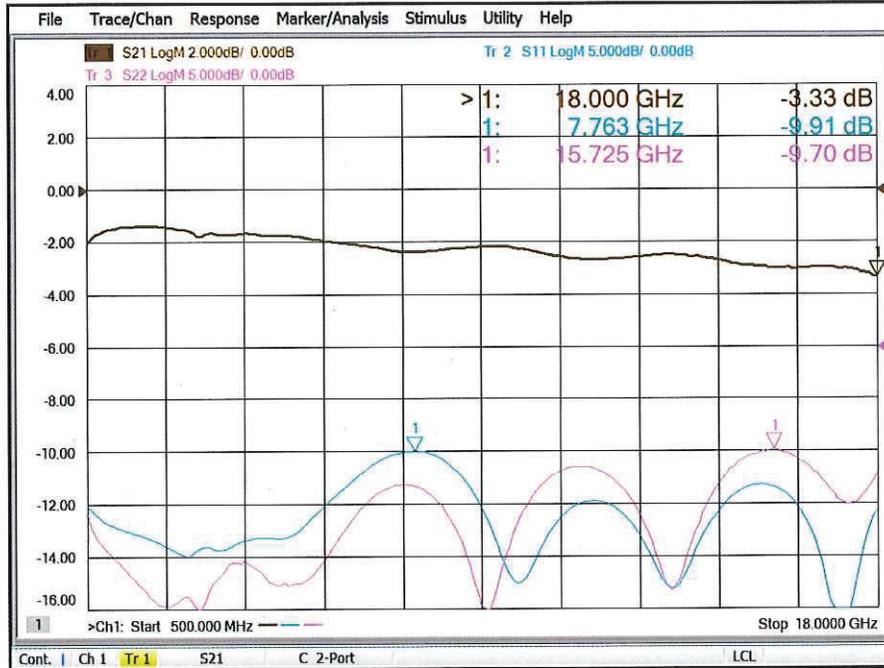

(J1 – J2) Isolation and Termination

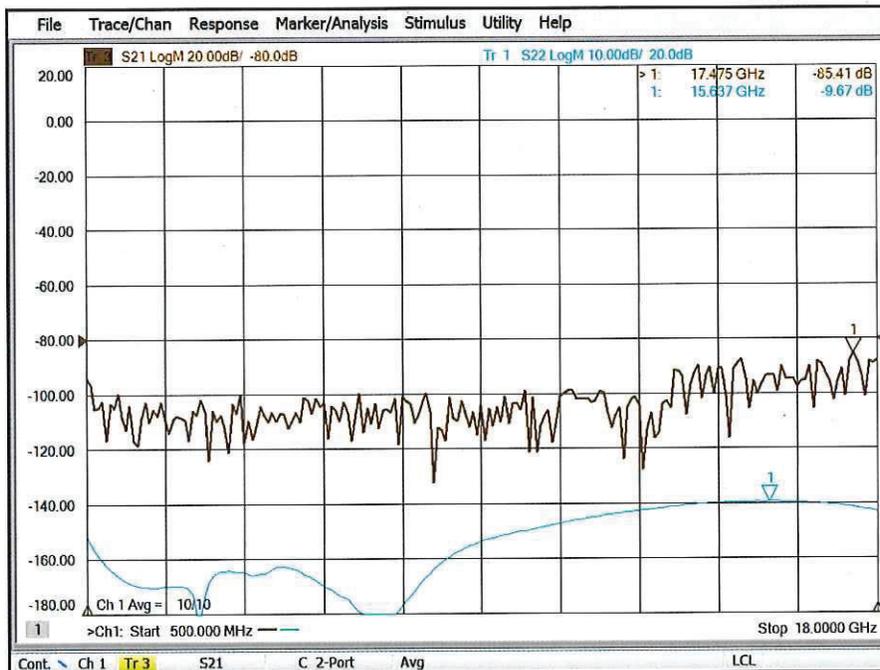




**SUMMARY TEST DATA
ON
P2T-500M18G-80-T-55-SFF-1**

PL25420/1916

(J1 – J3) Insertion Loss and Return Loss

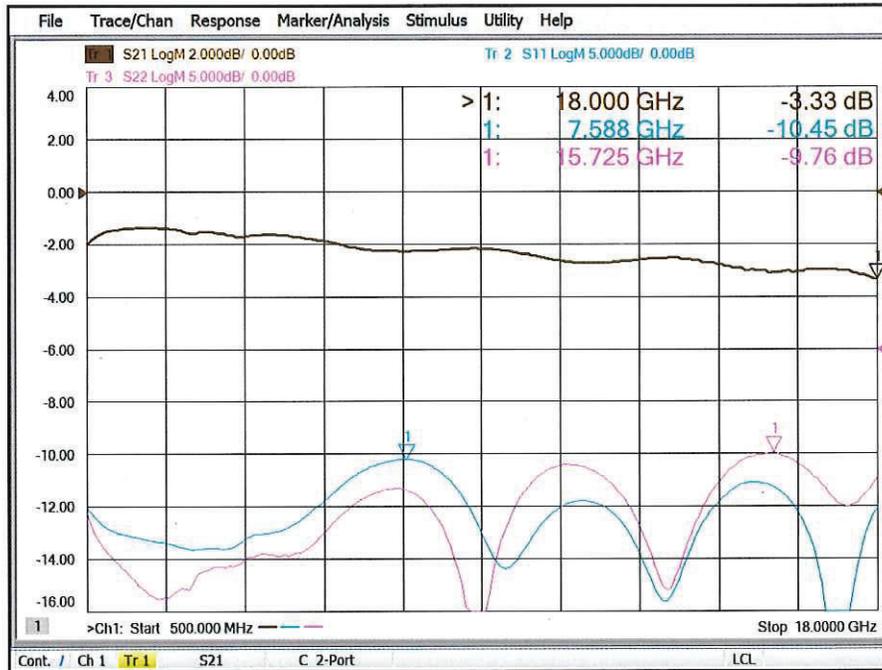

(J1 – J3) Isolation and Termination

