

**SUMMARY TEST DATA
ON
PE2-30-3R58R5-1R5-10-12-SFF**

Customer: _____
 SO No: _____
 Model No: PE2-30-3R58R5-1R5-10-12-SFF
 Serial No: PL57811/2605




Tested By: A. Mousavi
 Temperature: +2 °C
 Date: 1/31/2026
 Drawing No: 27605444 REV: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	3.5 TO 8.5 GHz	3.5 TO 8.5 GHz	PMI QAA
2	Gain:	32 dB TYP 30 dB Min	+ 31.7 dB Max. + 30.45 dB Min. See Graph	
3	Gain Flatness:	±1.5 dB Max.	±0.62 dB See Graph	
4	Noise Figure :	2.5 dB MAX	1.82 dB See Graph	
5	OP1dB:	+14 dBm MIN	+ 14.89 dBm See Graph	
6	VSWR: (Input/Output)	2.0:1 Max.	1.84 :1 (In)	
			1.29 :1 (Out) See Graph	
7	DC Supply:	+12 to +15 VDC @ 200 mA MAX	+12 to +15 VDC @ 180 mA	PMI QAA

QA/QC Approval: *Cumurung Keleng*

Date: 02/17/2026

**SUMMARY TEST DATA
ON
PE2-30-3R58R5-1R5-10-12-SFF**

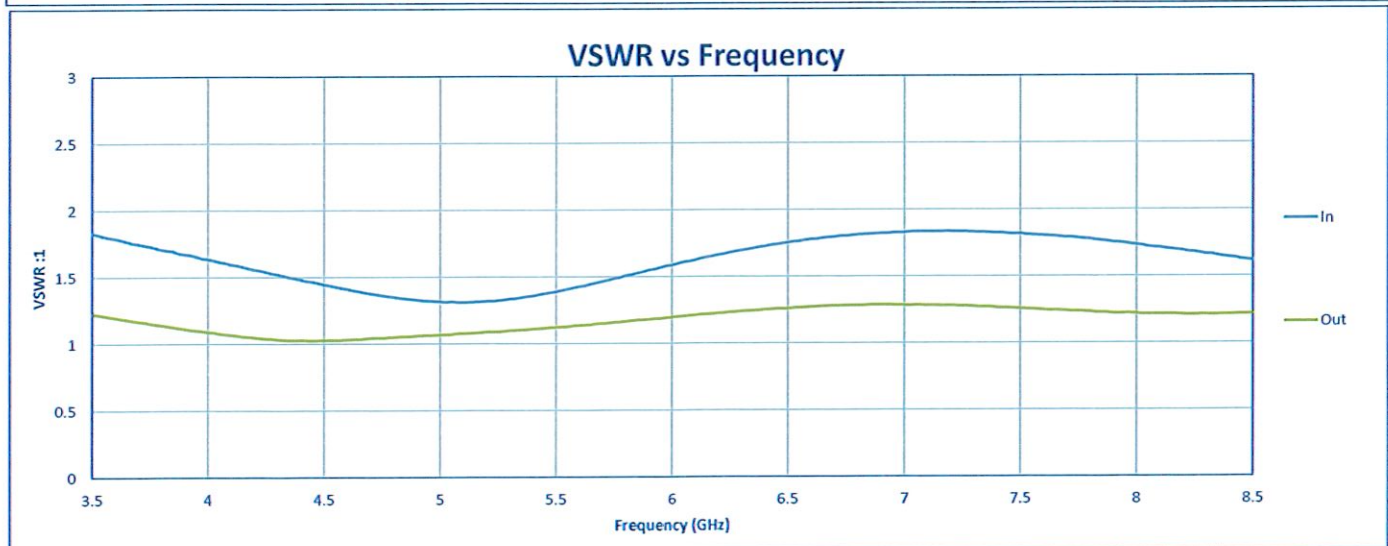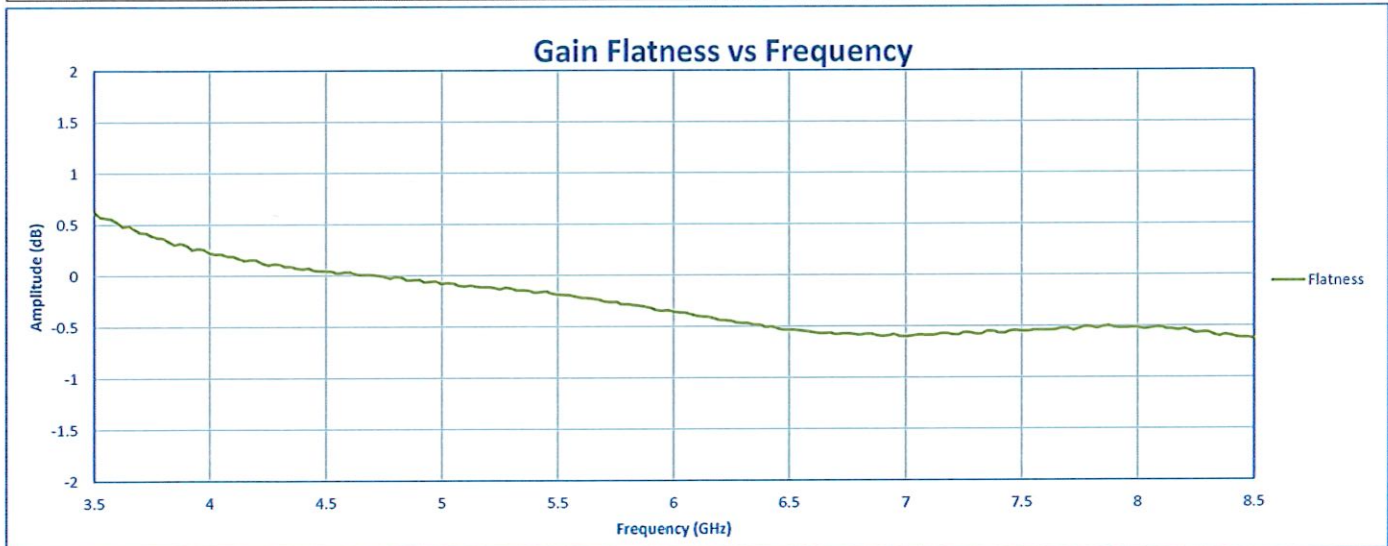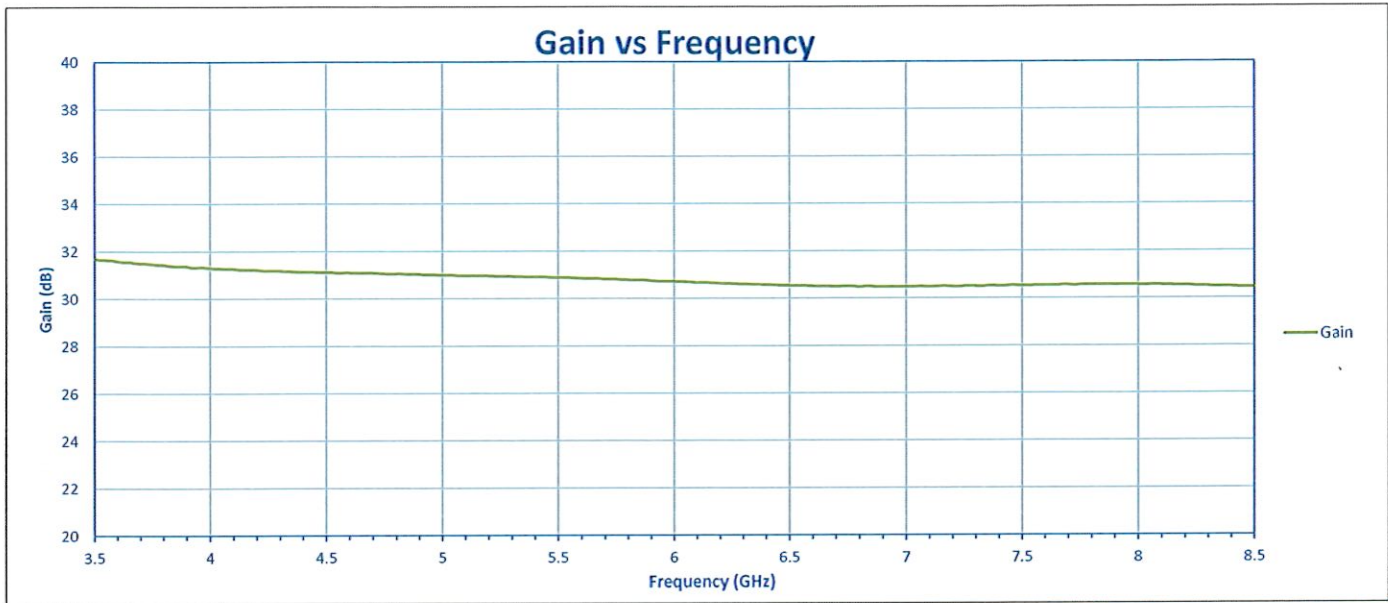

SUMMARY TEST DATA ON PE2-30-3R58R5-1R5-10-12-SFF

