

**SUMMARY TEST DATA
ON
LM-20M18G-100W-15DBM**

Customer: _____
SO No: _____
Model No: LM-20M18G-100W-15DBM
Serial No: PL61076/2628

Tested By: OLIVER K
Temperature: +25°C
Date: 7/7/2026
Drawing No: 27640060 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	20 MHz to 18 GHz	20 MHz to 18 GHz	PMI QA6
2	Insertion Loss:	2.6 dB Max. @ -10 dBm Input Power	2.02 dB See Graph	
3	VSWR:	2.0:1 Max. @ -10 dBm Input Power	1.94:1 In 1.93:1 Out See Graph	
4	Input Power:	100W cw Max. @ -55C TO +85C	Pass See Typical Characteristics	
5	Max. Pulsed Peak Power Handling:	1kW Peak (0.1% Duty Cycle, 1µsec Max. Pulse Width)	Pass See Typical Characteristics	
6	Flat Leakage:	+15 dBm Max. 100W CW	Pass See Typical Characteristics	
7	Recovery Time:	100 ns Max.	Pass See Typical Characteristics	
8	Limiting Threshold: P1dB:	+5 dBm Min.	+6 dBm See Graph	PMI QA6

QA/QC Approval:

Anthony Karczy
PMI
QA6


Date:

7/20/26


SUMMARY TEST DATA ON LM-20M18G-100W-15DBM

PL61076/2628

Insertion Loss

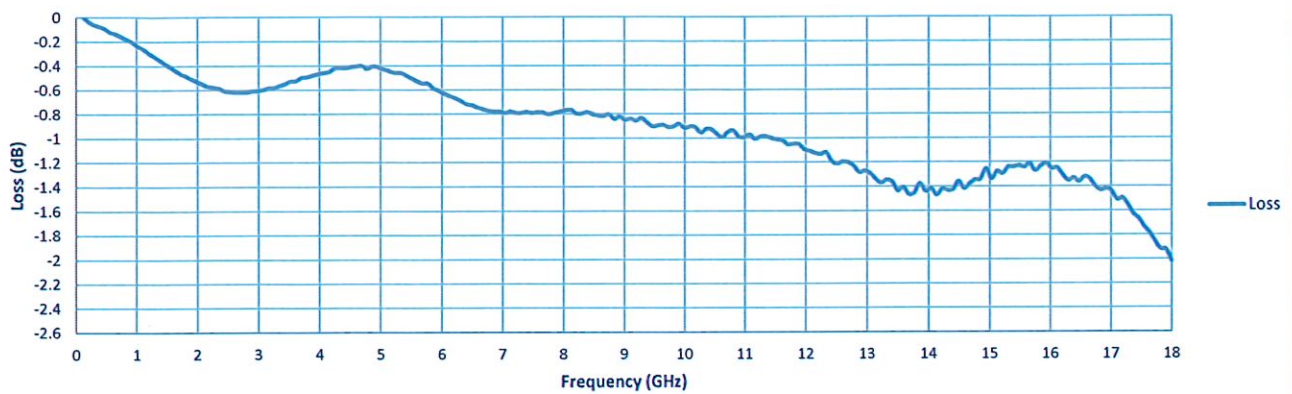

VSWR

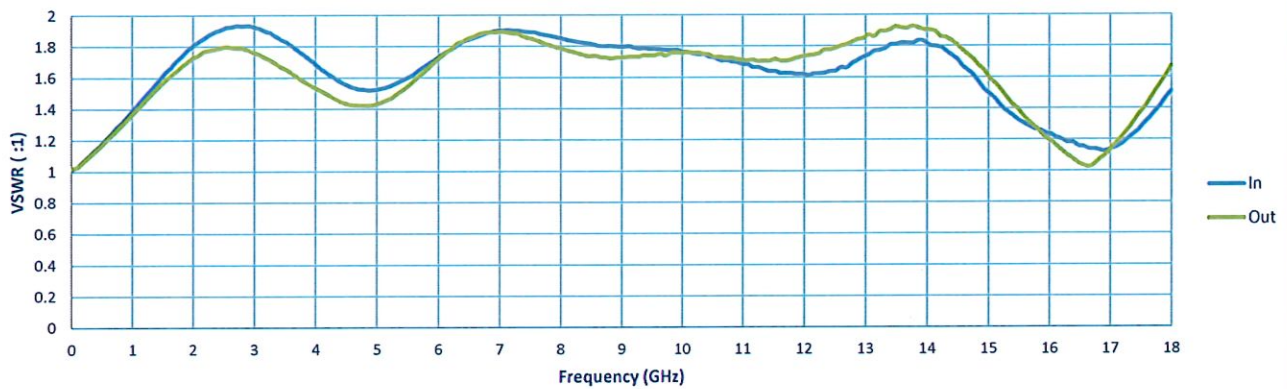

Limiter Response with Frequency

