



SUMMARY TEST DATA ON PDT-8G12G-40-515-SFF

Customer: _____
SO No: _____
Model No: PDT-8G12G-40-515-SFF
Serial No: PL62145/2636

Tested By: K. Wagaman
Temperature: +25° C, -54° C
Date: 8/31/2026
Drawing No: 27630580 Rev: A3

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		QA QC
			+25° C	-54° C	
1	Frequency Range:	8 GHz to 12 GHz	8 GHz to 12 GHz		PMI QA6
2	Insertion Loss:	2 dB Max., 8-10 GHz 2.3 dB Max., 10-12 GHz	1.87 dB 2.02 dB See Graph	1.87 dB 1.95 dB See Graph	
3	Isolation:	40 dB Min.	49.8 dB See Graph	50.5 dB See Graph	
4	VSWR:	1.8:1 Typ.	1.37:1 In 1.34:1 Out See Graph	1.36:1 In 1.36:1 Out See Graph	
5	Switching Speed:	200 ns Max.	Pass See Typical Characteristics	Pass See Typical Characteristics	
6	Input Power	40 dBm CW Avg.	Pass See Typical Characteristics	Pass See Typical Characteristics	
7	Operating Peak Power:	57 dBm Max 1 μ s Pulse Width, 1% Duty Cycle.	Pass See Typical Characteristics	Pass See Typical Characteristics	
8	DC Supply:	+5 V @ 100 mA Max.. -15 V @ 100 mA Max.	+5V @ 26 mA -15 V @ 0 mA	+5 V @ 25 mA -15 V @ 0 mA	
9	Control:	Logic Table		Pass	PMI QA6
		CTL1	Function		
		1	J0-J1		
		0	J0-J2		

QA/QC Approval: _____


Anthony Karoly

PMI
QA6


Date: _____

8/31/26

Insertion Loss

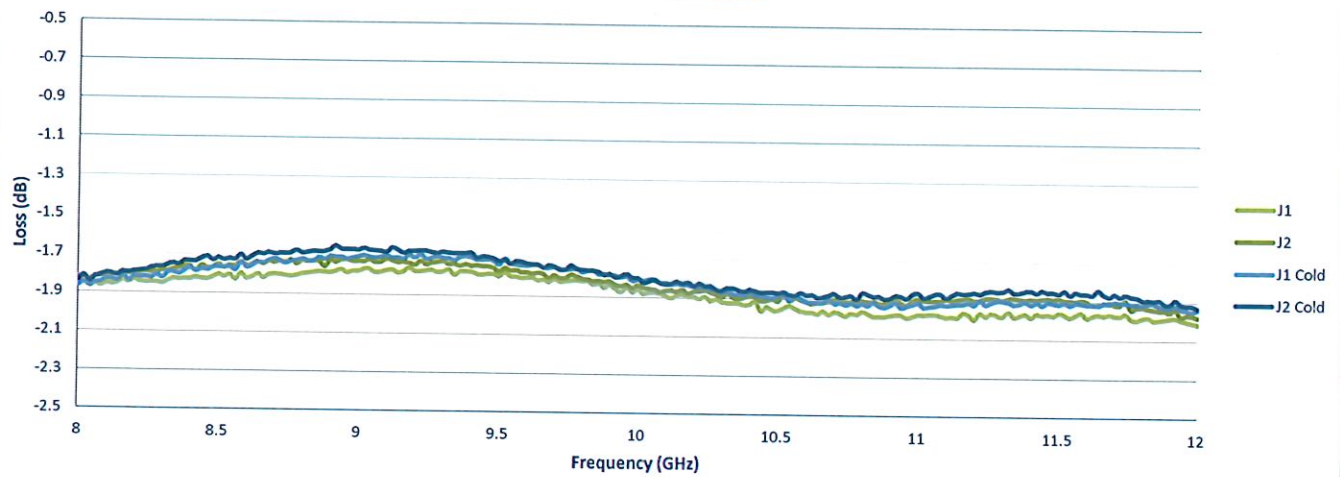

VSWR

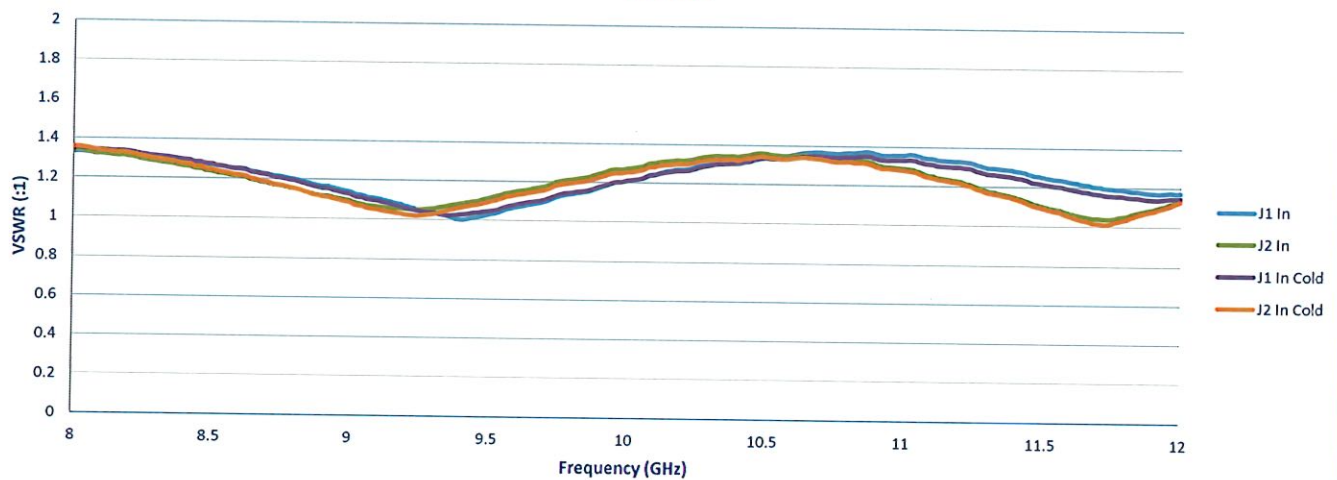

Isolation

