



Features and Benefits

25 KHz to 200 MHz operating frequency range for 3.3V supply
15 mA max.
Less than +/- 25 ppm over -40°C to +85°C
CMOS output
7.0 x 5.0 x 1.4 mm SMD
3.3V supply voltage


Typical Applications

CPU, Graphics, Multimedia A/V clocks
MPEG/DVD/HDTV clocks
Laser engine pixel/set-top clocks
OC-3, OC-12, OC-48 and OC-192 clocks
SONET/SDH/ATM clocks


Fast Ethernet and Gigabit Ethernet clocks
NTSC/PAL encoder/Decoder clocks
PLL/synthesizer clocks
Fibre channel and ADSL clocks

Mechanical Drawing & Pin Connections


Drawing No: MD150027-2

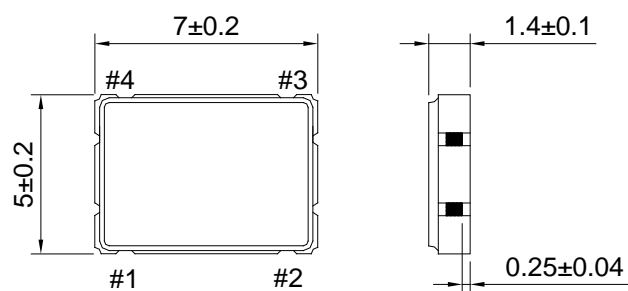

PAD	Function
#1	Enable/Disable
#2	Ground
#3	Output
#4	Supply Voltage

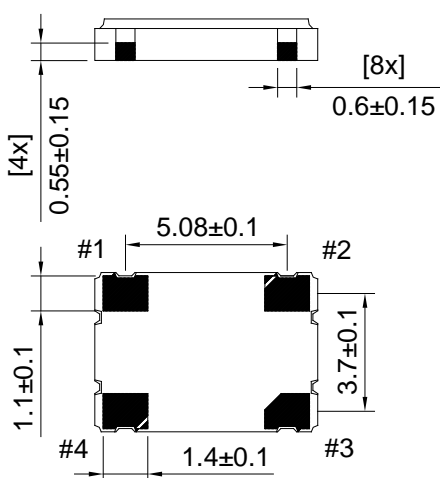

Unit : mm

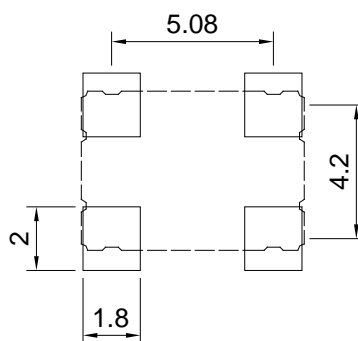



Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Nominal Frequency	F _{nom}			50		MHz	
Output Wave Form			CMOS				
Output Voltage Level(High)			2.97			V	
Output Voltage Level(Low)					0.33	V	
Output Load				15		pF	
Duty Cycle			40	50	60	%	Optional: 50%+/-5%
Rise and Fall Times		Measured between 10% <-->90% of wave form(CL=15pF)			10.0	nSec	
Start Time					5.0	mSec	
Tri-State Function		Output is high impedance when “0” is applied to pin 1					
		Disable time is 150 nsec max.					
Power Supply							
Supply Voltage	V _{cc}		3.135	3.3	3.465	V	
Supply Current		At maximum supply voltage			15	mA	
Frequency Stability							
Vs. Temperature		From -40°C to +85°C			+/-25	ppm	
Aging		Per year			+/-3	ppm	
Parameter	Reference Std.			Test Condition			
Operating Temperature range	-40°C to +85°C						
Storage Temperature range	-50°C to +100°C						