



REVISION				
LTR	ECO	DESCRIPTION	DATE	APPROVED
PRE		INITIAL RELEASE	3/28/25	KB

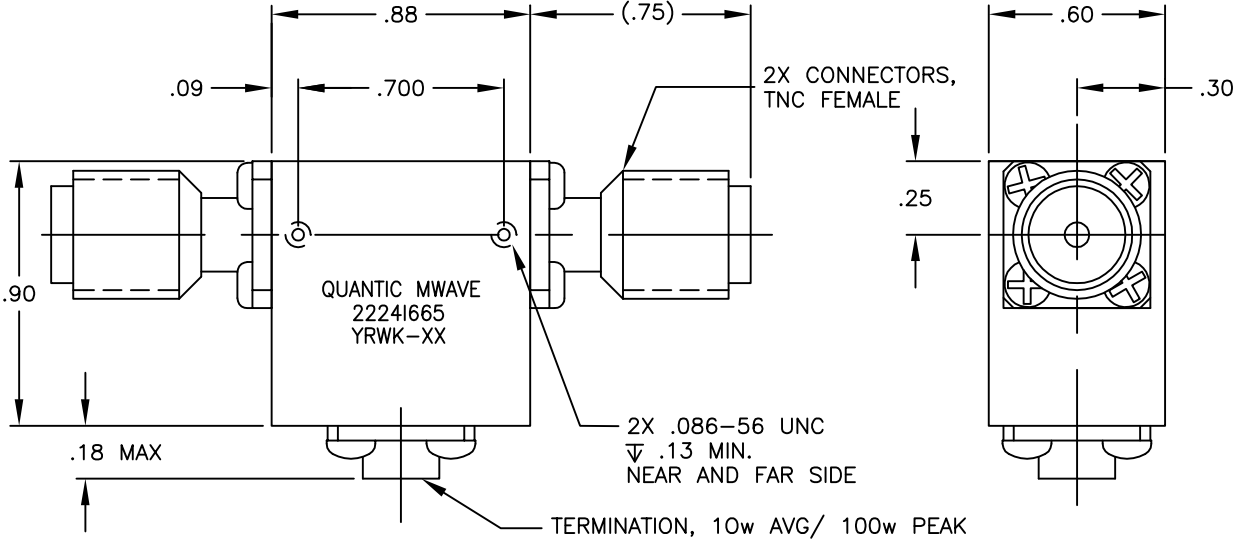

SPECIFICATIONS:

FREQUENCY	2.2-2.4 GHz
ISOLATION	25 dB MIN
INSERTION LOSS	.2 dB MAX
V.S.W.R.	1.12:1 MAX
POWER:	30w AVG/ 1Kw Pk FWD
OPERATING TEMP:	0 TO +70 °C

OUTLINE DRAWING



2 MARK APPROX AS SHOWN
IAW SMP 1036 (LASER)

1 M WAVE DESIGN CATALOG MODEL

NOTES:

DIMENS. ARE IN INCHES FRACT.±1/32 ANG±0°30' TOL .XX±.02 .XXX±.010
DO NOT SCALE DRAWING

CONTR. NO
DRWN BAM 3/28/25
CHK
DSGN KRB 3/28/25
ENG
QA
APPD

Quantic™ M-Wave			
TITLE ISOLATOR, S BAND			
SIZE A	CODE IDENT 0M2Z7	PART NO. 2224I665	
SCALE NONE	WEIGHT N/A	SHEET 1 OF 1	