

# DESCRIPTION

PMI MODEL: P8T-0R5G18G-70-T-SFF IS A SINGLE POLE EIGHT THROW ABSORPTIVE SWITCH. THIS MODEL HAS THE FOLLOWING SPECIFICATIONS.

# SPECIFICATIONS

- FREQUENCY RANGE:..... 0.5 TO 18.0 GHz
- INSERTION LOSS:..... 4.5 dB MAX
- ISOLATION:..... 0.5 GHz TO 2 GHz: 60 dB MIN  
2 GHz TO 18 GHz: 70 dB MIN
- VSWR:..... IN / OUT: 2.0:1 Typ  
TERMINATED OUT: 2.0:1 Typ
- RISE/FALL TIME:..... 10 ns TYPICAL, 15 ns MAX
- DELAY ON/OFF:..... 75 ns TYPICAL, 100 ns MAX
- INPUT POWER:..... +20 dBm CW MAX
- SURVIVAL POWER:..... 1 WATT CW MAX (+30 dBm)  
10 WATTS PEAK 1 μs PULSE,  
1% DUTY CYCLE
- CONTROL:..... TTL CONTROL – SEE LOGIC TABLE
- POWER SUPPLY:..... +5VDC @ 400 mA MAX  
-5VDC @ 100 mA MAX
- CONNECTORS IN/OUT:..... SMA (F) REMOVABLE
- CONTROL CONNECTORS:..... SOLDER PINS
- SIZE:..... 4.00" (L) X 1.50" (W) X 0.40" (H)
- FINISH:..... GOLD PLATED

# ENVIRONMENTAL RATINGS


- TEMPERATURE:..... -55°C TO +85°C (OPERATING)  
-65°C TO +125°C (STORAGE)
- HUMIDITY:..... MIL-STD-202G, METHOD 103B COND. B
- SHOCK:..... MIL-STD-202G, METHOD 213B COND. B
- VIBRATION:..... MIL-STD-202G, METHOD 204D COND. B
- ALTITUDE:..... MIL-STD-202G, METHOD 105C COND. B
- TEMPERATURE CYCLE:..... MIL-STD-202G, METHOD 107G COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE  
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.010  
X.XXX ±0.005

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	04/12/11	
	A2	ECN # 13-0062	06/17/13	

# MECHANICAL OUTLINE

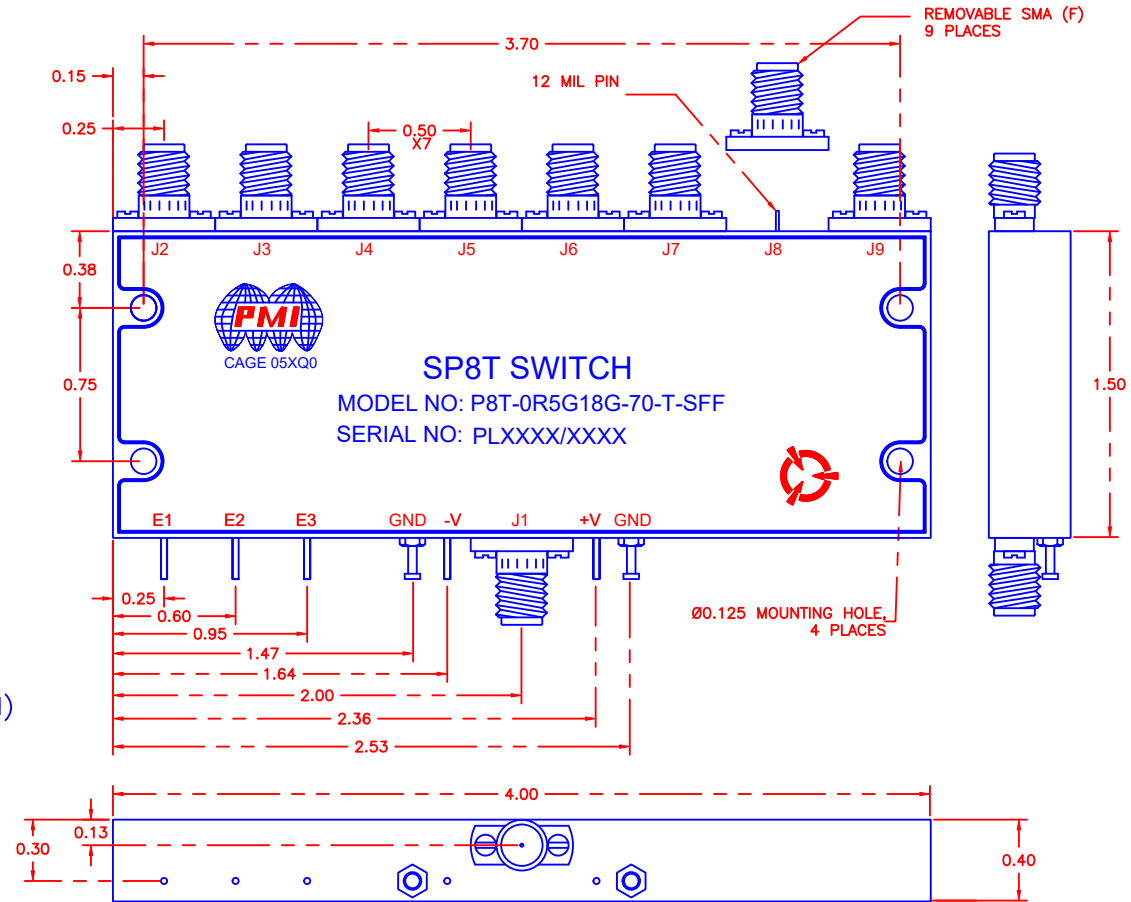

LOGIC TABLE				
3 BIT DECODER				
E1	E2	E3	FUNCTION	
0	0	0	J1-J2 "Low Loss"	
0	0	1	J1-J3 "Low Loss"	
0	1	0	J1-J4 "Low Loss"	
0	1	1	J1-J5 "Low Loss"	
1	0	0	J1-J6 "Low Loss"	
1	0	1	J1-J7 "Low Loss"	
1	1	0	J1-J8 "Low Loss"	
1	1	1	J1-J9 "Low Loss"	

# PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD  
FREDERICK, MARYLAND 21704 USA  
TEL: 301-662-5019 FAX: 301-662-1731  
WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN DPD		04/12/11	PRODUCT FEATURE P8T-0R5G18G-70-T-SFF		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. 27014421
ISSUED			SCALE N:S		SHEET 1 OF 1