
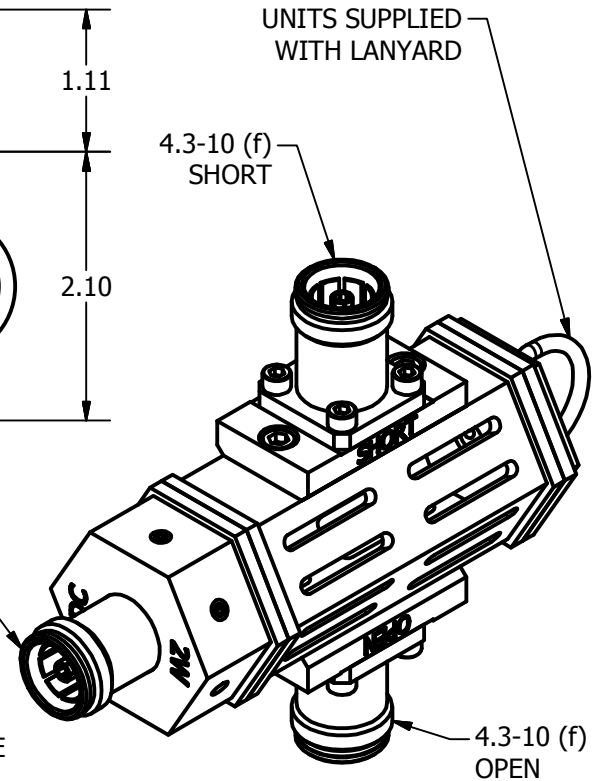
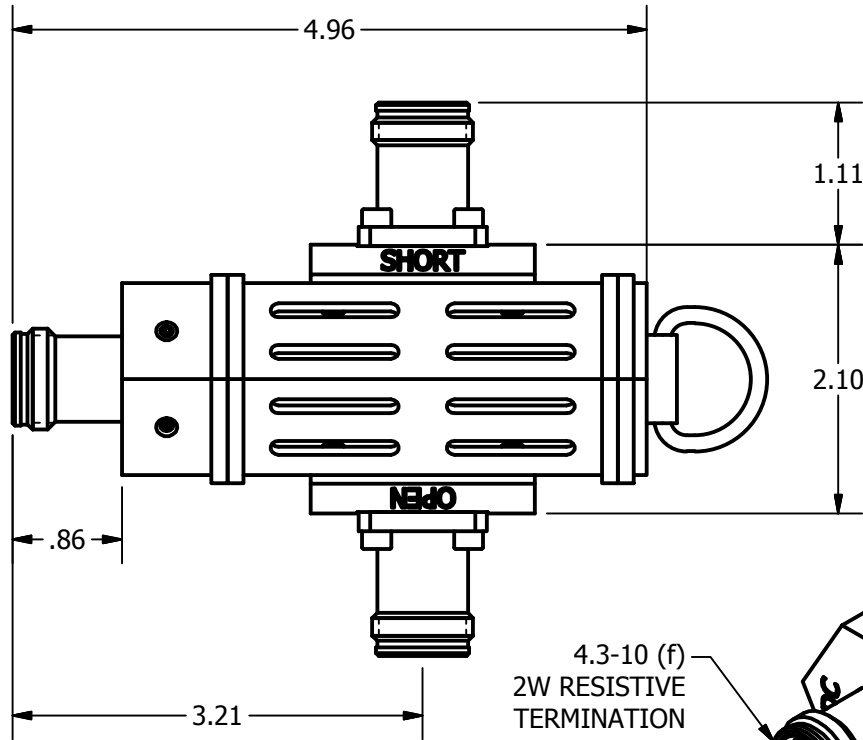


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ENGINEERING RELEASE	2/13/2025	DM

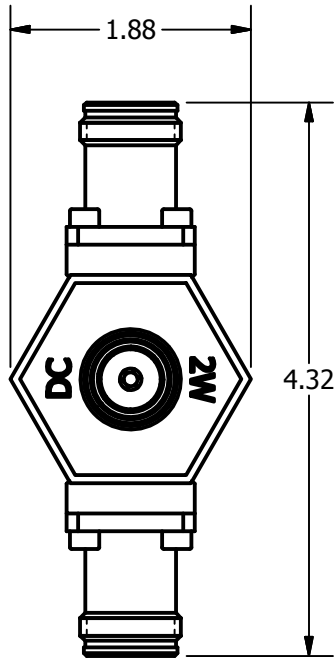

2W RESISTIVE TERMINATION:

FREQUENCY:	DC-6000 MHz		
IMPEDANCE:	50 OHMS		
VSWR:	1.07:1 MAX. DC-2700 MHz		
	1.08:1 MAX 2700-4200 MHz		
	1.12:1 MAX. 4200-5000 MHz		
	1.2:1 MAX. 5000-6000 MHz		
POWER:	2 W @25 DEG C		

SHORT:

FREQUENCY:	300-2700	2700-3500	3500-6000
ED:	214.4 pS	214.4 pS	214.4 pS
PHASE:	180 ± 4 DEG.	180 ± 6 DEG.	180 ± 10 DEG.
r:	± 0.1 dB	± 0.15 dB	± 0.2 dB

OPEN:

FREQUENCY:	300-2700	2700-3500	3500-6000
ED:	218.8 pS	218.8 pS	218.8 pS
PHASE:	0 ± 6 DEG.	0 ± 7 DEG.	0 ± 8 DEG.
r:	± 0.1 dB	± 0.15 dB	± 0.2 dB

NOTE: ANY COMBINATION OF MALE OR FEMALE
7-16 DIN AND 4.3-10 ARE AVAILABLE
UPON REQUEST

DRAWN mclaughlind	2/13/2026
ALL DIMENSIONS DERIVED FROM THE ELECTRONIC FILE ON THE SAME PLANE SHOULD BE WITHIN ±0.005 FROM TRUE POSITION, UNLESS OTHERWISE NOTED	
PROPERTY OF R&D MICROWAVES LLC	



TITLE			
CK-A11, 4.3-10(f) CALIBRATION KIT			
SIZE A	DWG NO CK-A11D43F-OLrev1		REV 1
SCALE 2:3	SHEET 1 OF 1		