
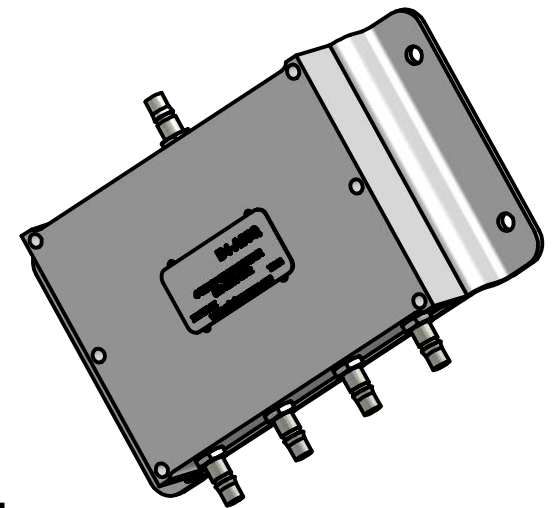



REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ENGINEERING RELEASE	12/14/16	TB

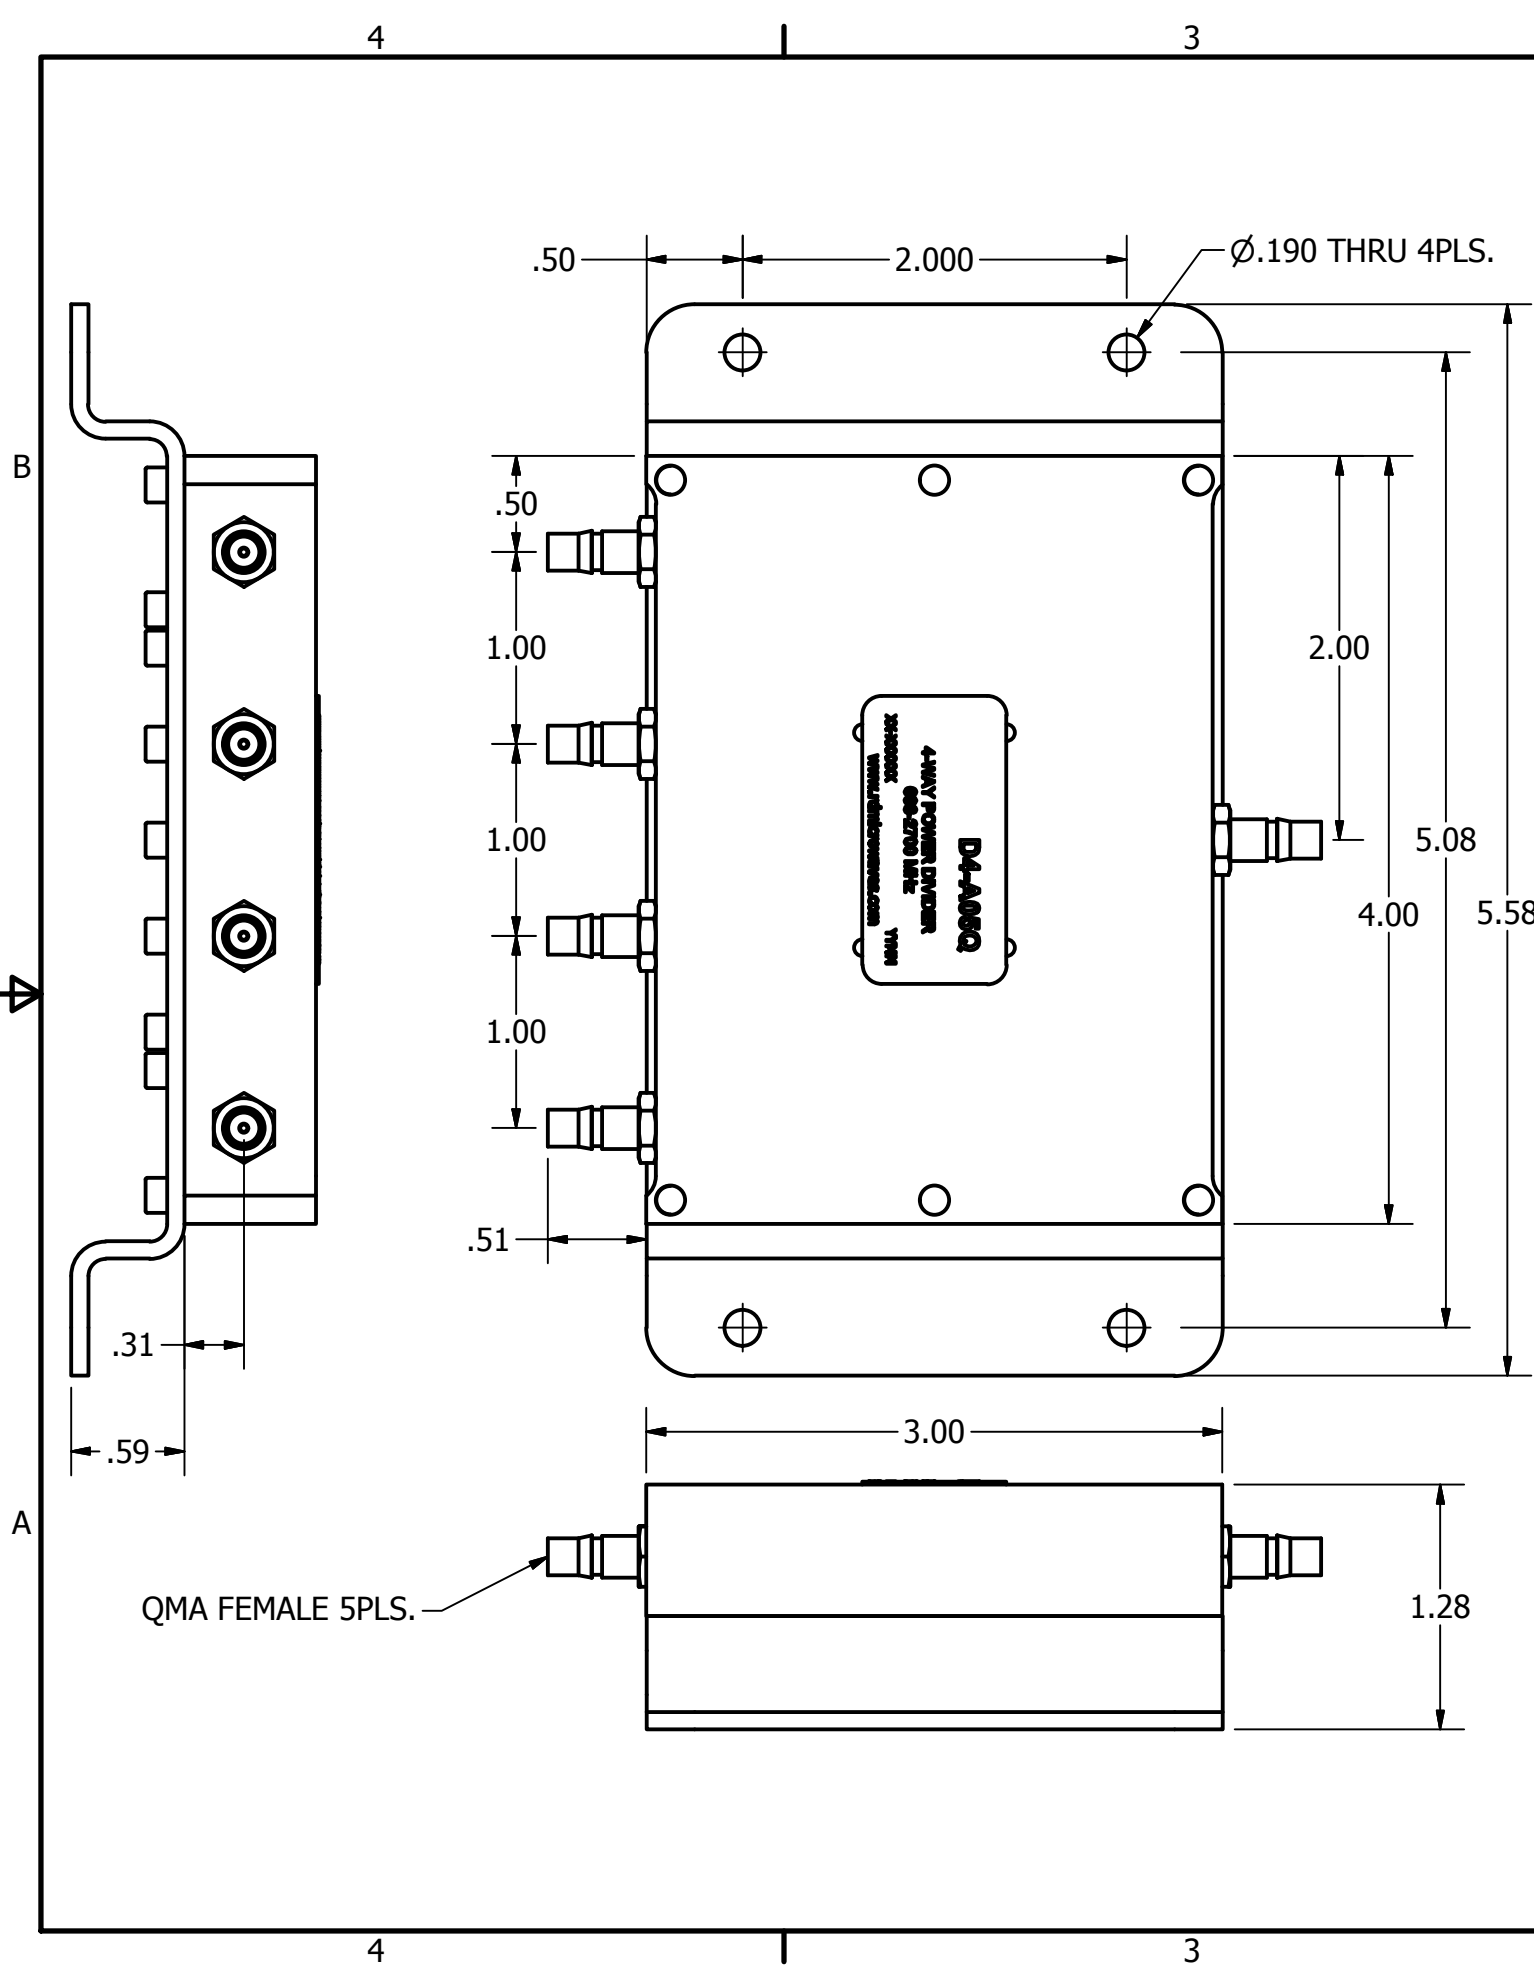

SPECIFICATIONS:

FREQUENCY: 698-2700 MHz
LOSS DUE TO DIVISION: 6.0 dB
INSERTION LOSS: 1.4 dB MAX
INPUT VSWR: 1.30:1 MAX
OUTPUT VSWR: 1.30:1 MAX
ISOLATION: 20 dB MIN
INPUT POWER: 30 WATTS
REVERSE POWER: 1000 mWATTS
FINISH: CLEAR IRIDITE
CONNECTORS: TYPE N (f)

HOLE TOLERANCE: X.XXX ±.003
LENGTH TOLERANCE: X.XX ±.030
LENGTH TOLERANCE: X.XXX ±.010
THREADS SPECIFICATION AFTER PLATING
PROPERTY OF R&D MICROWAVES LLC
ALL DIMENTIONS DERIVED FROM THE ELECTRONIC
FILE SHOULD BE WITHIN ± 0.005 FROM TRUE
POSITION, UNLESS OTHERWISE NOTED

DRAWN ThomasB	12/14/2016	 R&D Microwaves LLC, USA
CHECKED		
QA		TITLE
MFG		D4-A05Q Outline
APPROVED		SIZE
		B
		DWG NO
		D4-A05Q-OLrev1
		SCALE
		REV
		1
		SHEET 1 OF 1