



REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	ENGINEERING RELEASE	8/2/2013	Ernest W
	2	ADDED PHASE & AMP BAL SPEC CHANGED LOW END OF BAND FROM 7 TO 6 GHz	2/24/2015 11/29/23	TOM B TOM B

SPECIFICATIONS

FREQUENCY RANGE: 6-12.4 GHz
 INSERTION LOSS: 1.0 dB, MAX.
 INPUT POWER: 10 W, MAX.
 INPUT VSWR: 1.5:1, MAX
 ISOLATION: 16 dB, MIN.
 PHASE BAL: +/-6 DEG.
 AMP BAL: +/-0.3 dB

IN/OUT INTERFACE: SMA(f), 50-ohm
 OUTPUT PORTS: 4

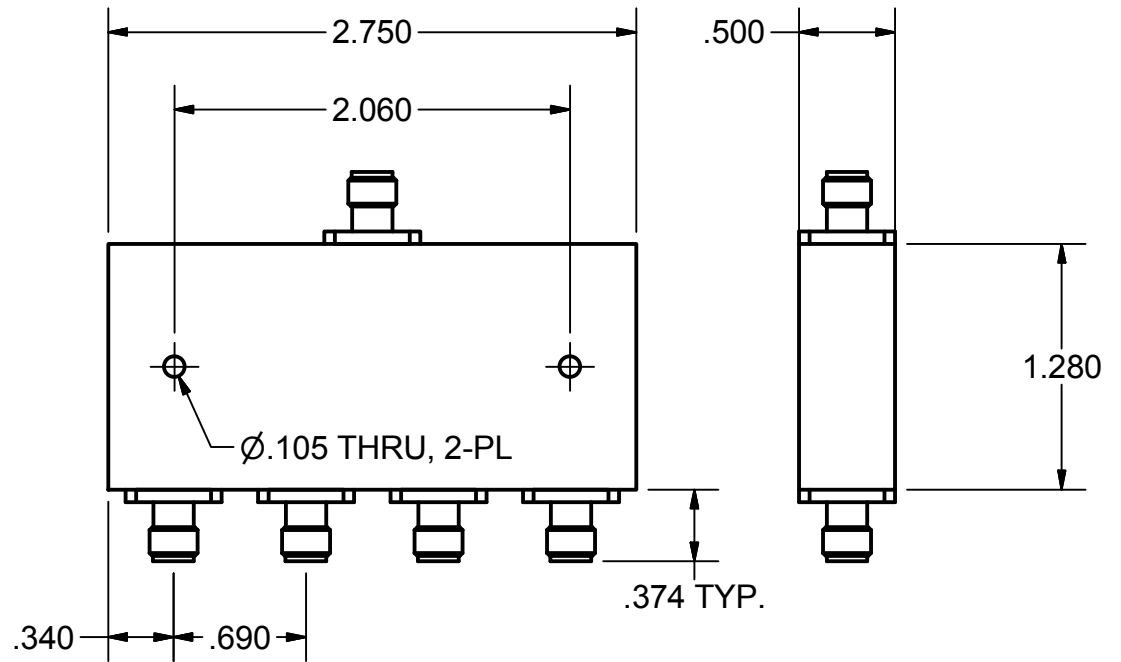

DRAWN Ernest Werbel	8/2/2013	 R&D Microwaves LLC, USA
CHECKED		
QA		TITLE
MFG		4-WAY POWER DIVIDER, 6-12.4 GHz
APPROVED		SIZE
		A
		DWG NO
		D4-A57
		REV
		2
		SCALE
		SHEET 1 OF 1