


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	7	ADD SLOT	04-10-2014	MA
	8	UPDATED FREQ RANGE AND CONNECTORS	1/18/2023	DM
	9	REVISED FREQ RANGE AND RETURN LOSS SPEC	7/23/2025	DM

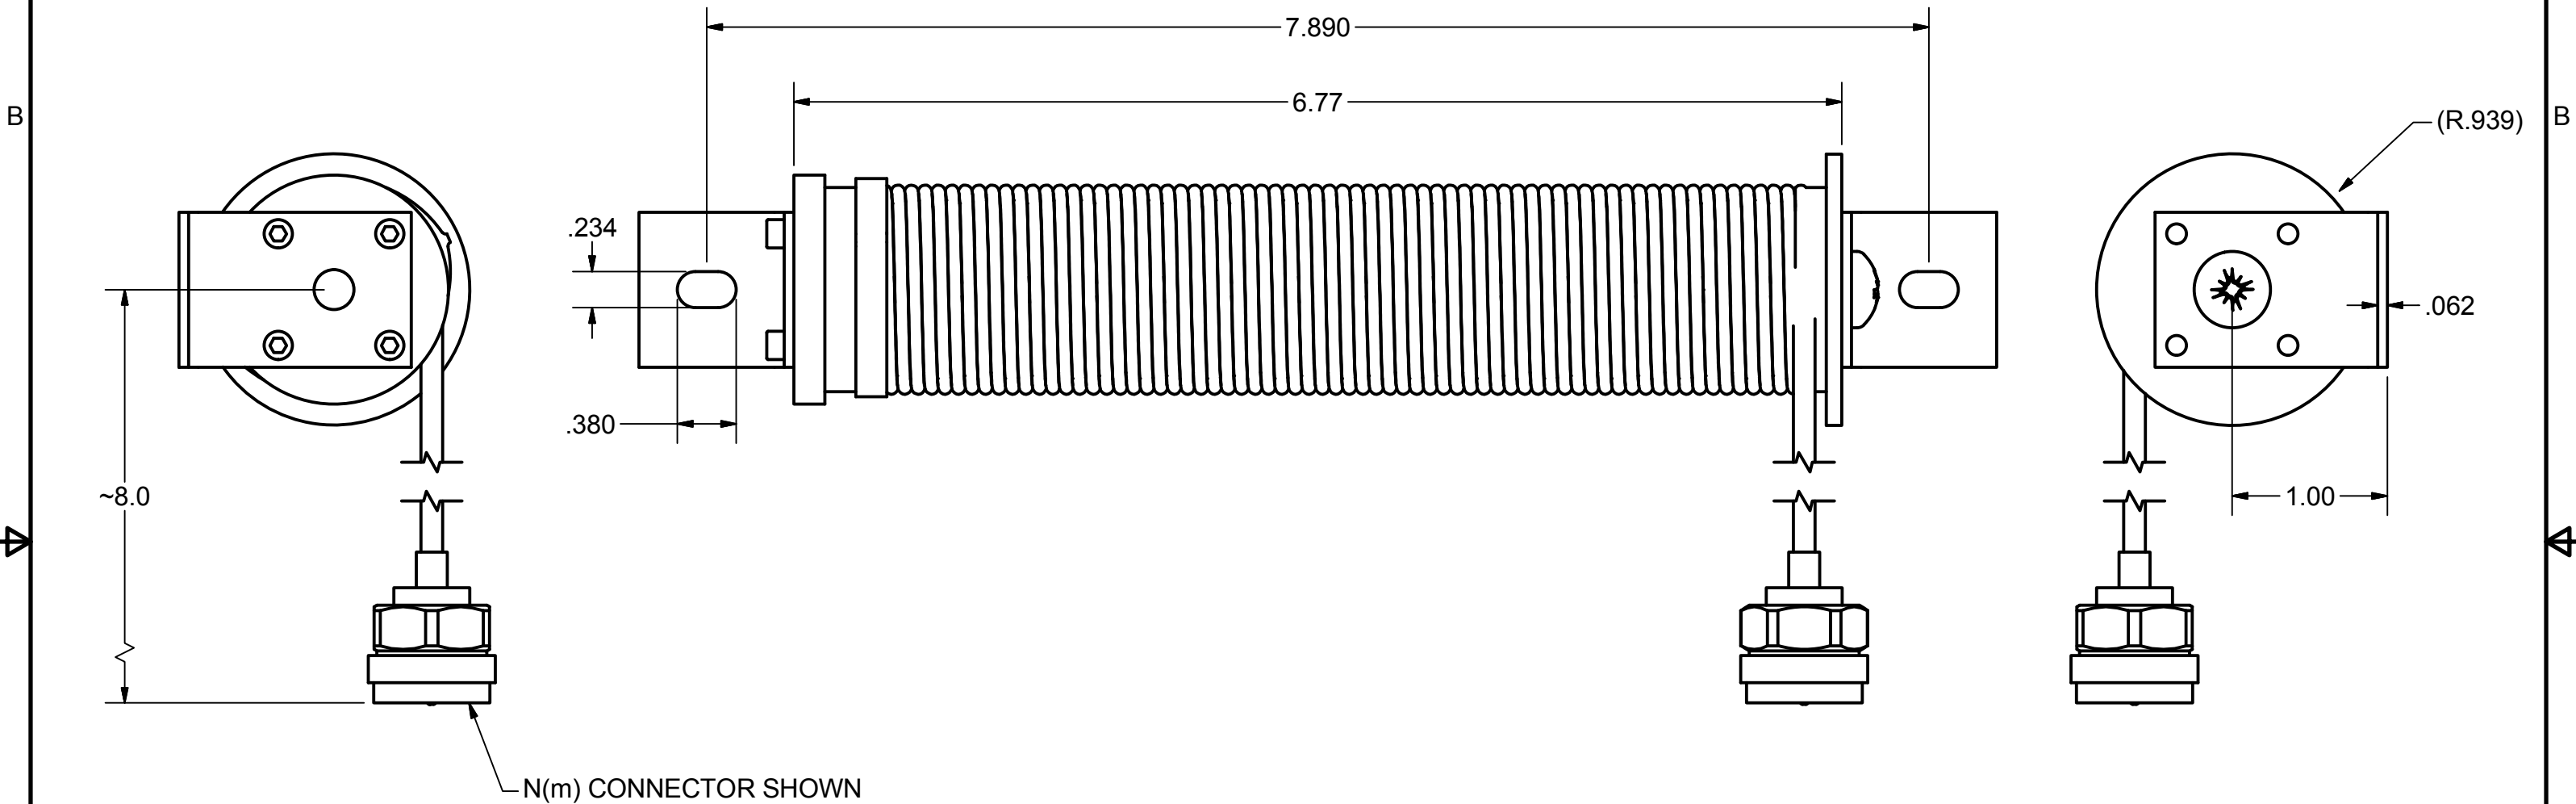

SPECIFICATION:

FREQUENCY:	698-3850 MHz
PIM:	160 dBc MAX.
RETURN LOSS:	23 dB TYPICAL (19 dB MIN)
POWER:	50 W AVG
CONNECTOR	TYPE N, 7-16, 4.3-10, OR NEX10 MALE OR FEMALE

TOLERANCE: X.X ±0.5 X.XX ±0.05
THREADS SPECIFICATION AFTER PLATING
PROPERTY OF R&D MICROWAVES LLC

DRAWN mareka1	10/4/2012	 R&D Microwaves LLC, USA		
CHECKED				
QA		TITLE LOW PIM TERMINATION 698-3850 MHz		
MFG				
APPROVED		SIZE B		
		SCALE	DWG NO TA-A54XX-OLrev9	REV 9
			SHEET 1 OF 1	