

**SUMMARY TEST DATA
ON
P5P-218-S6F**

PLANAR MONOLITHICS INDUSTRIES MODEL NUMBER P5P-218-S6F IS A PENTAPLEXER COVERING 2 TO 18 GHz. THE UNIT IS BANDED AS FOLLOWS 2-4 GHz, 4-6 GHz, 6-8 GHz, 8-12 GHz AND 12-18 GHz, WITH A RF SURVIVAL INPUT POWER OF 1W CW.



**DESIGNED BY
PMI ENGINEERING**

**TESTED & REPORTED BY
R. SIRK**

**DATE
January 19, 2026**

SUMMARY TEST DATA ON P5P-218-S6F OUTLINE

DESCRIPTION:

PLANAR MONOLITHICS INDUSTRIES MODEL NUMBER P5P-218-S6F IS A PENTAPLEXER COVERING 2 TO 18 GHz. THE UNIT IS Banded AS FOLLOWS 2-4 GHz, 4-6 GHz, 6-8 GHz, 8-12 GHz AND 12-18 GHz, WITH A RF SURVIVAL INPUT POWER OF 1W CW.

SPECIFICATIONS:


- RF INPUT FREQUENCY RANGE:.....2.0 TO 18.0 GHz
 - RF SURVIVAL INPUT POWER:.....+30 dBm (1 WATT) CW MAX
 - CROSSOVER INSERTION LOSS:.....4 GHz $\pm$ 2%; 5.5 dB TYP.
6 GHz $\pm$ 2%; 5.5 dB TYP.
8 GHz $\pm$ 2%; 5.5 dB TYP.
12 GHz $\pm$ 2%; 5.5 dB TYP.
- BAND 1:**
- FREQUENCY RANGE:.....2.0 TO 4.0 GHz
 - INSERTION LOSS:.....1.5 dB MAX @ 2.1 TO 3.8 GHz
 - RETURN LOSS (OVER INSERTION LOSS BAND): 12 dB MIN
 - REJECTION:.....-40 dBc MIN @ DC TO 1.7 GHz, 4.3 TO 20 GHz
- BAND 2:**
- FREQUENCY RANGE:.....4.0 TO 6.0 GHz
 - INSERTION LOSS:.....1.5 dB MAX @ 4.2 TO 5.7 GHz
 - RETURN LOSS (OVER INSERTION LOSS BAND): 12 dB MIN
 - REJECTION:.....-40 dBc MIN @ DC TO 3.7 GHz, 6.3 TO 20 GHz
- BAND 3:**
- FREQUENCY RANGE:.....6.0 TO 8.0 GHz
 - INSERTION LOSS:.....1.5 dB MAX @ 6.3 TO 7.8 GHz
 - RETURN LOSS (OVER INSERTION LOSS BAND): 12 dB MIN
 - REJECTION:.....-40 dBc MIN @ DC TO 5.7 GHz, 8.3 TO 20 GHz
- BAND 4:**
- FREQUENCY RANGE:.....8.0 TO 12.0 GHz
 - INSERTION LOSS:.....1.5 dB MAX @ 8.4 TO 11.4 GHz
 - RETURN LOSS (OVER INSERTION LOSS BAND): 12 dB MIN
 - REJECTION:.....-40 dBc MIN @ DC TO 7.7 GHz, 12.3 TO 20 GHz
- BAND 5:**
- FREQUENCY RANGE:.....12.0 TO 18.0 GHz
 - INSERTION LOSS:.....1.5 dB MAX @ 12.6 TO 17.1 GHz
 - RETURN LOSS (OVER INSERTION LOSS BAND): 12 dB MIN
 - REJECTION:.....-40 dBc MIN @ DC TO 11.7 GHz, 18.6 TO 20 GHz
- SIZE:.....3.22" X 1.96" X 0.39"
 - FINISH:.....82mm X 50mm X 10mm
PAINTED BLUE

ENVIRONMENTAL RATINGS:

- TEMPERATURE:.....-40°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)

NOTE: SPECIFICATIONS WILL VARY OVER TEMPERATURE

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

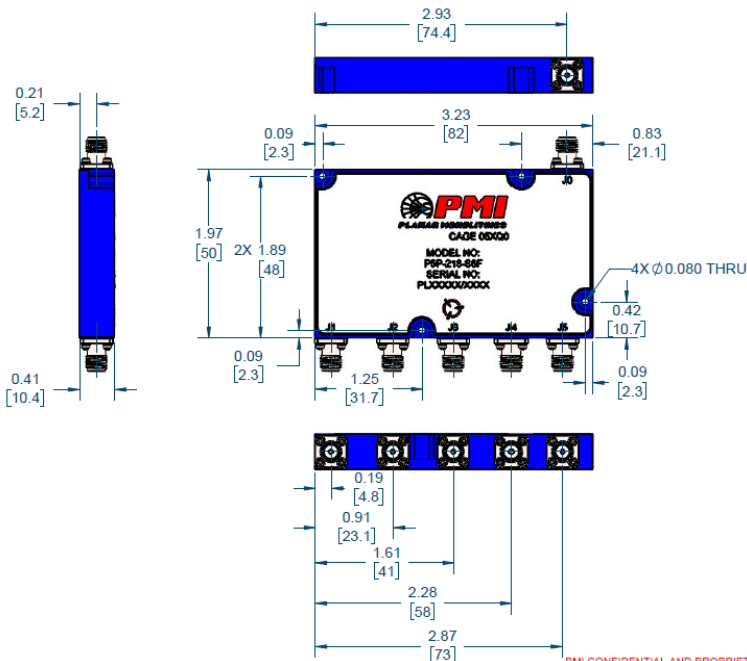

PMI CONFIDENTIAL AND PROPRIETARY

APPROVALS		DATE	TITLE	
DESIGN	R. SIKK	01/02/04	OUTLINE	
ISSUED			P5P-218-S6F	
SIZE	B	PCB NO. 05XQ0	DWG NO. 27049780	REV. B1
SCALE 1:1			SHEET 1 OF 1	

SUMMARY TEST DATA ON P5P-218-S6F

Technical Specifications - Band 1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			-40°C	+25°C	+85°C
1	Passband:	2 GHz to 4 GHz	2 GHz to 4 GHz		
2	Insertion Loss:	1.5 dB Max (2.1 to 3.8 GHz)	1.33 dB	1.37 dB	1.41 dB
3	Return Loss: (Over Insertion Loss Band)	12 dB Min	14.46 dB	14.11 dB	13.69 dB
4	Rejections:	-40 dBc MIN (DC-1.7 GHz & 4.3-20 GHz)	DC - 1.7 GHz: 47.01 dBc 4.3 - 20 GHz: 49.71 dBc	DC - 1.7 GHz: 47.11 dBc 4.3 - 20 GHz: 45.24 dBc	DC - 1.7 GHz: 47.58 dBc DC - 1.7 GHz: 47.58 dBc

Technical Specifications - Band 2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			-40°C	+25°C	+85°C
5	Passband:	4 GHz to 6 GHz	4 GHz to 6 GHz		
6	Insertion Loss:	1.5 dB Max (4.2 to 5.7 GHz)	1 dB	1.13 dB	1.27 dB
7	Return Loss: (Over Insertion Loss Band)	12 dB Min	19.33 dB	17.5 dB	16.59 dB
8	Rejections:	-40 dBc MIN (DC-3.7 GHz & 6.3-20 GHz)	DC - 3.7 GHz: 46.18 dBc 6.3 - 20 GHz: 55.04 dBc	DC - 3.7 GHz: 50.77 dBc 6.3 - 20 GHz: 54.75 dBc	DC - 3.7 GHz: 51.01 dBc 6.3 - 20 GHz: 54.05 dBc

Technical Specifications - Band 3

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			-40°C	+25°C	+85°C
9	Passband:	6 GHz to 8 GHz	6 GHz to 8 GHz		
10	Insertion Loss:	1.5 dB Max (6.3 to 7.6 GHz)	1 dB	1.03 dB	1.08 dB
11	Return Loss: (Over Insertion Loss Band)	12 dB Min	14.78 dB	15.47 dB	14.05 dB
12	Rejections:	-40 dBc MIN (DC-5.7 GHz & 8.3-20 GHz)	DC - 5.7 GHz: 48.29 dBc 8.3 - 20 GHz: 53.68 dBc	DC - 5.7 GHz: 49.39 dBc 8.3 - 20 GHz: 53.5 dBc	DC - 5.7 GHz: 49.69 dBc 8.3 - 20 GHz: 53.62 dBc

Technical Specifications - Band 4

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			-40°C	+25°C	+85°C
13	Passband:	8 GHz to 12 GHz	8 GHz to 12 GHz		
14	Insertion Loss:	1.5 dB Max (8.4 to 11.4 GHz)	1.09 dB	1.11 dB	1.15 dB
15	Return Loss: (Over Insertion Loss Band)	12 dB Min	12.27 dB	12.5 dB	12.08 dB
16	Rejections:	-40 dBc MIN (DC-7.7 GHz & 12.3-20 GHz)	DC - 7.7 GHz: 48.62 dBc 12.3 - 20 GHz: 49.12 dBc	DC - 7.7 GHz: 50.05 dBc 12.3 - 20 GHz: 49.07 dBc	DC - 7.7 GHz: 50.22 dBc 12.3 - 20 GHz: 49.2 dBc

SUMMARY TEST DATA ON P5P-218-S6F

Technical Specifications - Band 5


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			-40°C	+25°C	+85°C
17	Passband:	12 GHz to 18 GHz	12 GHz to 18 GHz		
18	Insertion Loss:	1.5 dB Max (12.6 to 17.1 GHz)	0.84 dB	1.09 dB	1.03 dB
19	Return Loss: (Over Insertion Loss Band)	12 dB Min	18.76 dB	17.37 dB	14 dB
20	Rejections:	-40 dBc MIN (DC-11.7 GHz & 18.6-20 GHz)	DC - 11.7 GHz: 47.22 dBc	DC - 11.7 GHz: 49.39 dBc	DC - 11.7 GHz: 50.41 dBc
			18.6 - 20 GHz: 40.83 dBc	18.6 - 20 GHz: 42.21 dBc	18.6 - 20 GHz: 43.2 dBc

Technical Specifications - General


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS		
			-40°C	+25°C	+85°C
21	Operating Frequency:	2 GHz to 18 GHz	2 GHz to 18 GHz		
22	Crossover Insertion Loss:	5.5 dB Typ. (4 GHz $\pm$ 2%)	5.38 dB @ 3.959 GHz	5.61 dB @ 3.997 GHz	5.66 dB @ 4.021 GHz
		5.5 dB Typ. (6 GHz $\pm$ 2%)	5.22 dB @ 5.983 GHz	5.9 dB @ 5.987 GHz	6.43 dB @ 5.985 GHz
		5.5 dB Typ. (8 GHz $\pm$ 2%)	5.85 dB @ 7.94 GHz	6.66 dB @ 7.942 GHz	7.21 dB @ 7.942 GHz
		5.5 dB Typ. (12 GHz $\pm$ 2%)	6.67 dB @ 11.951 GHz	7.13 dB @ 11.955 GHz	7.64 dB @ 11.955 GHz

SUMMARY TEST DATA ON P5P-218-S6F


All Bands (+25°C)

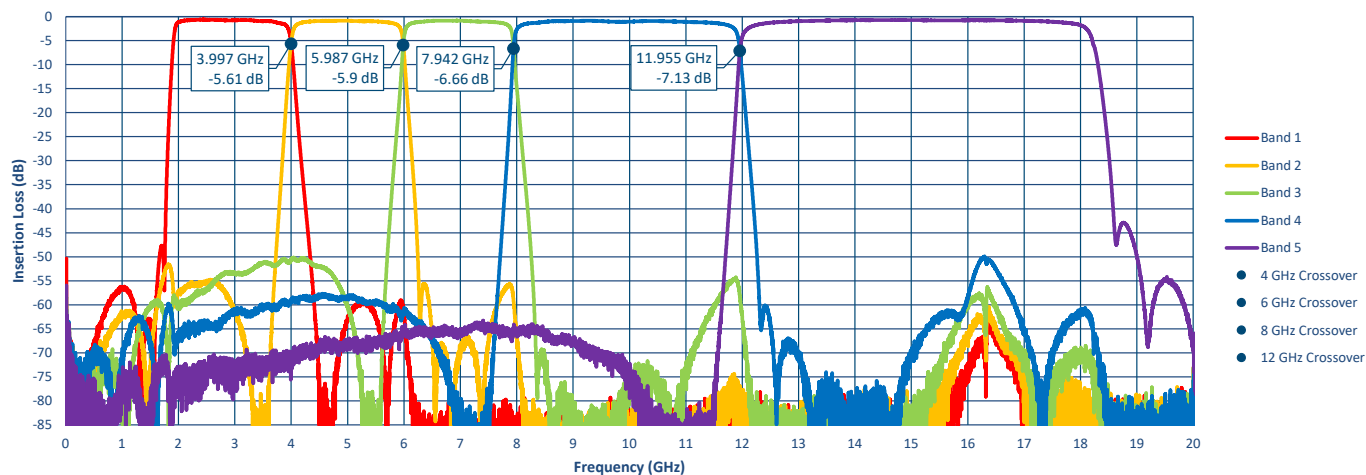

All Bands (-40°C)

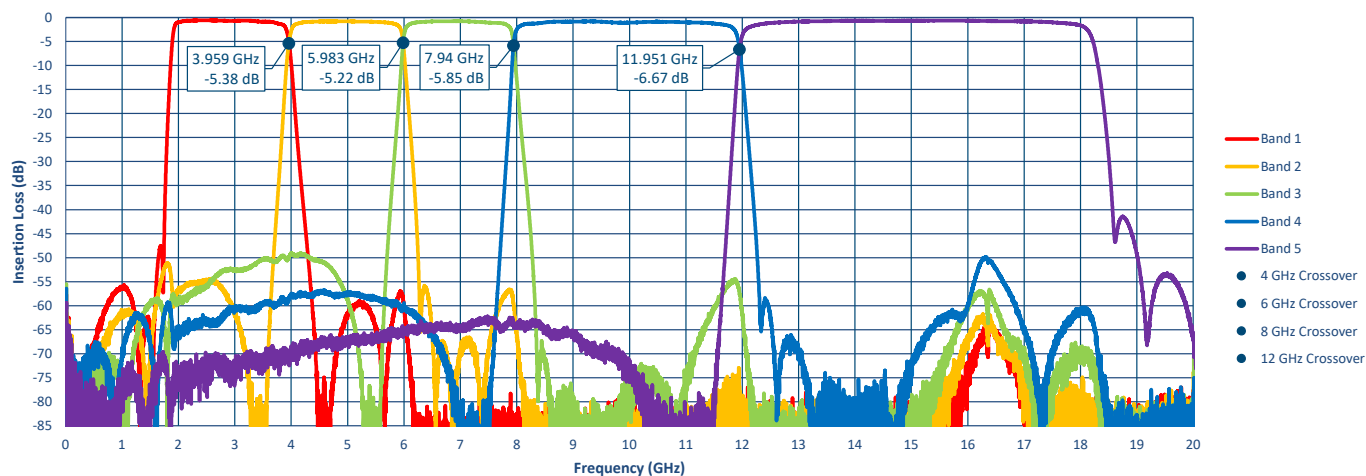


All Bands (+85°C)

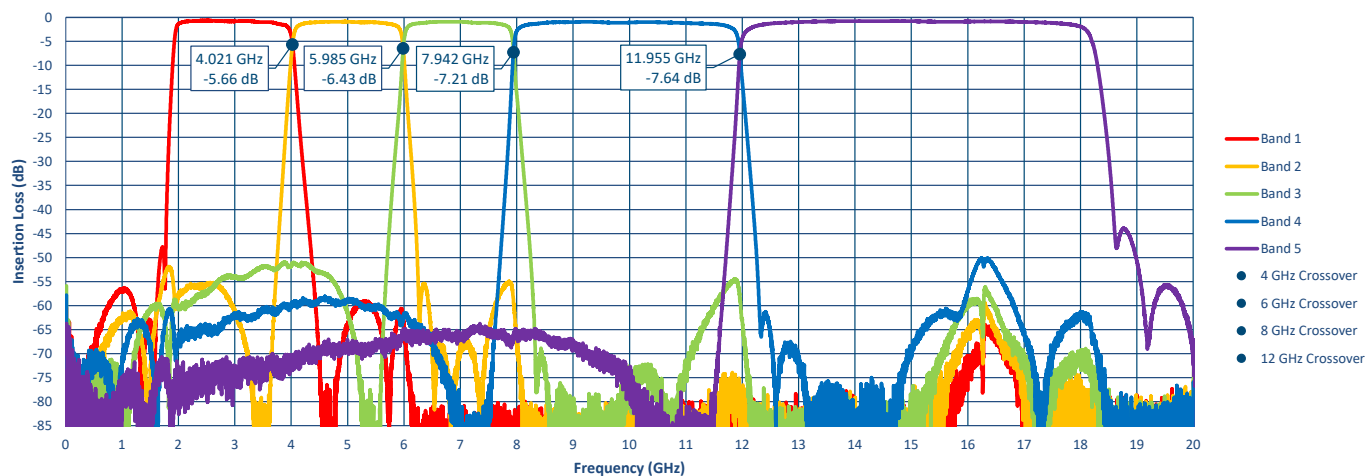


**SUMMARY TEST DATA
ON
P5P-218-S6F**


All Bands - Extended (+25°C)

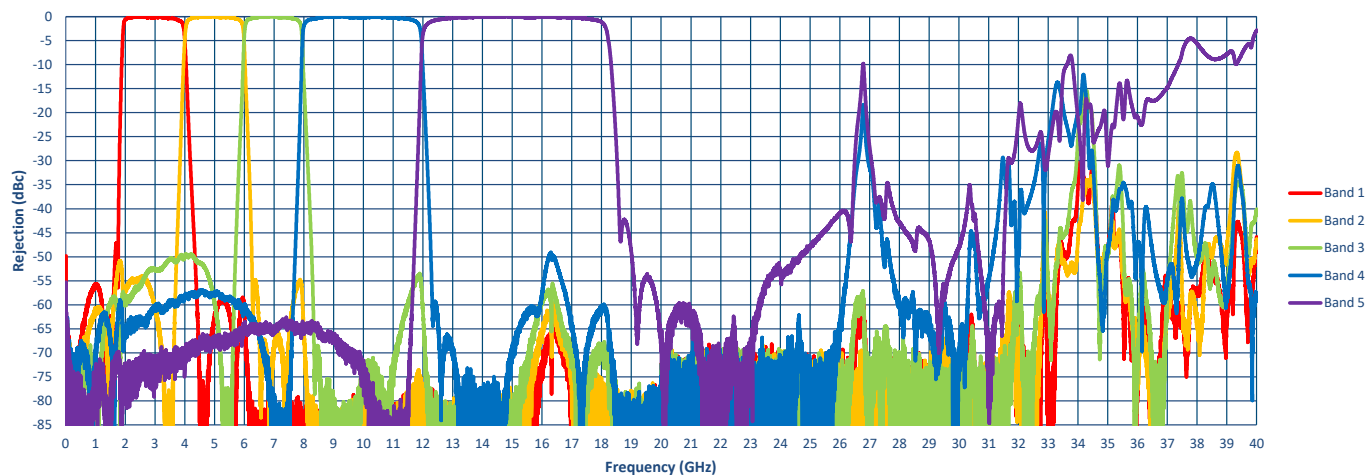


All Bands - Extended (-40°C)

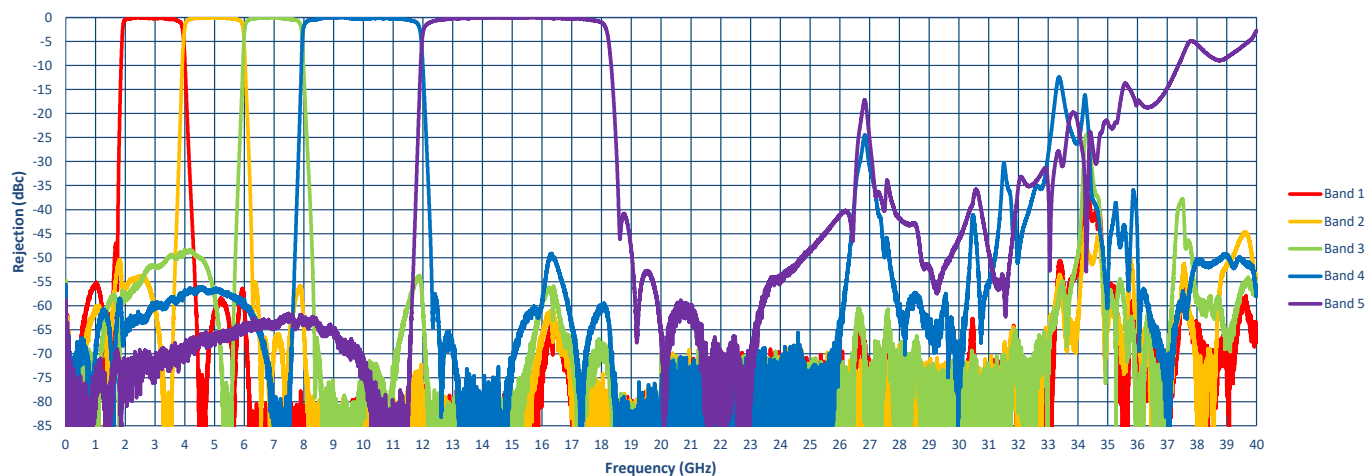


All Bands - Extended (+85°C)

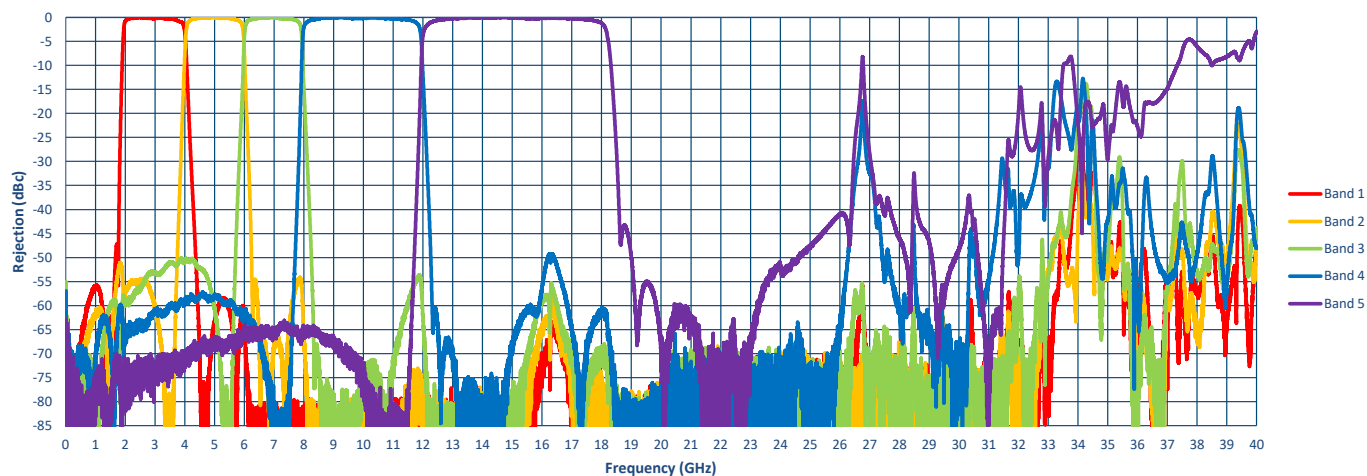


Band 1 - Passband Return Loss - S11

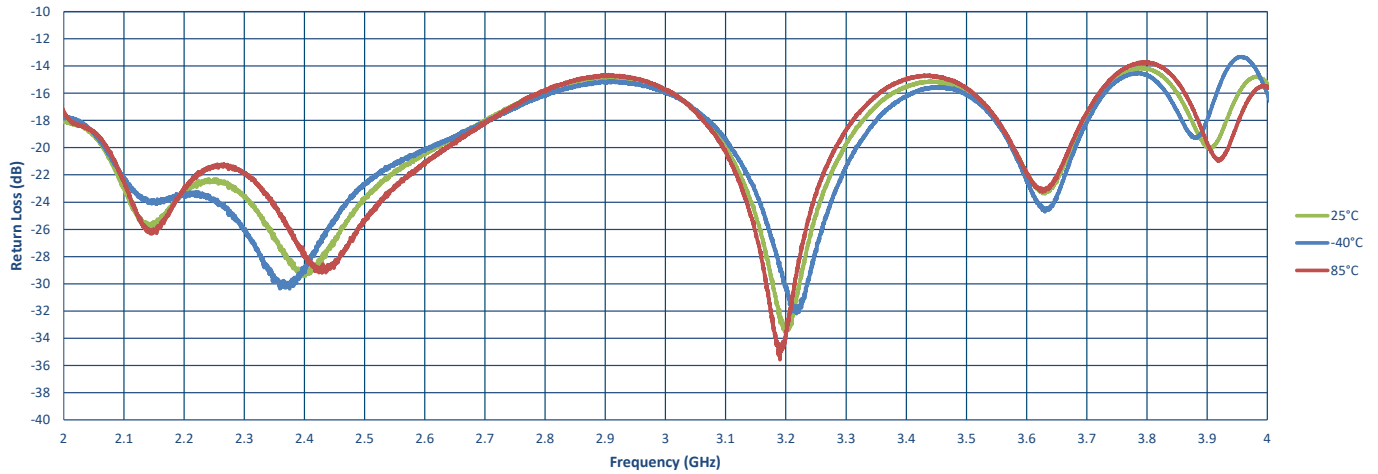


Band 1 - Passband Return Loss - S22

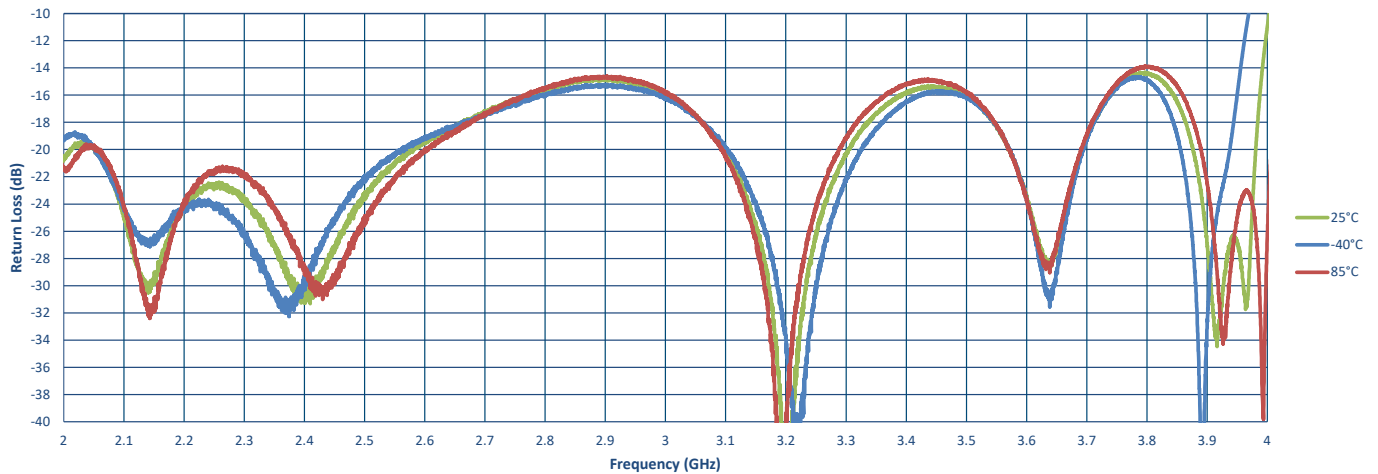


Band 1 - Passband Insertion Loss

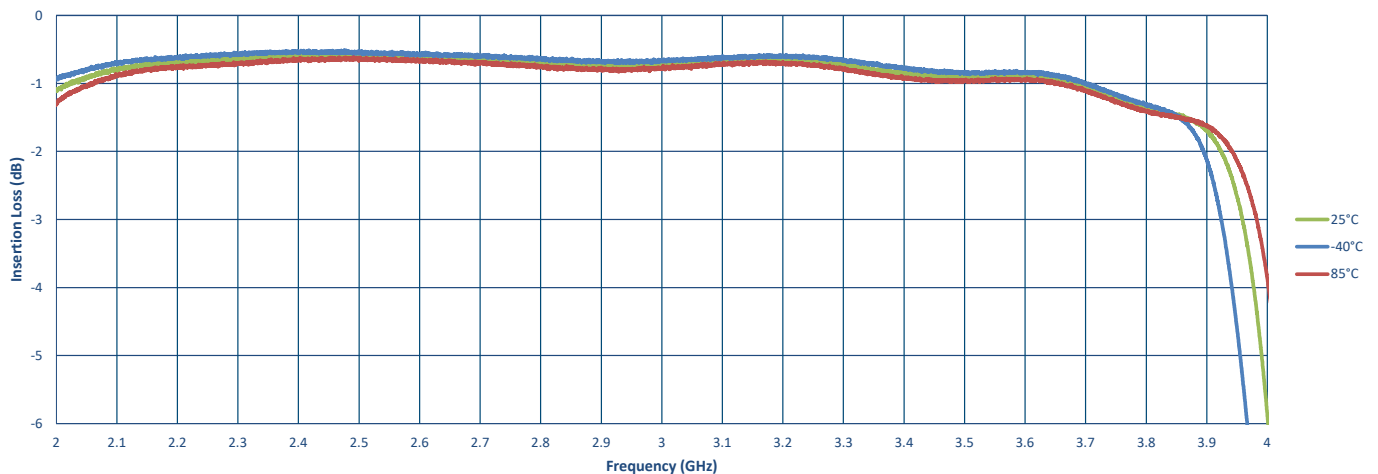


Band 1 - Rejections

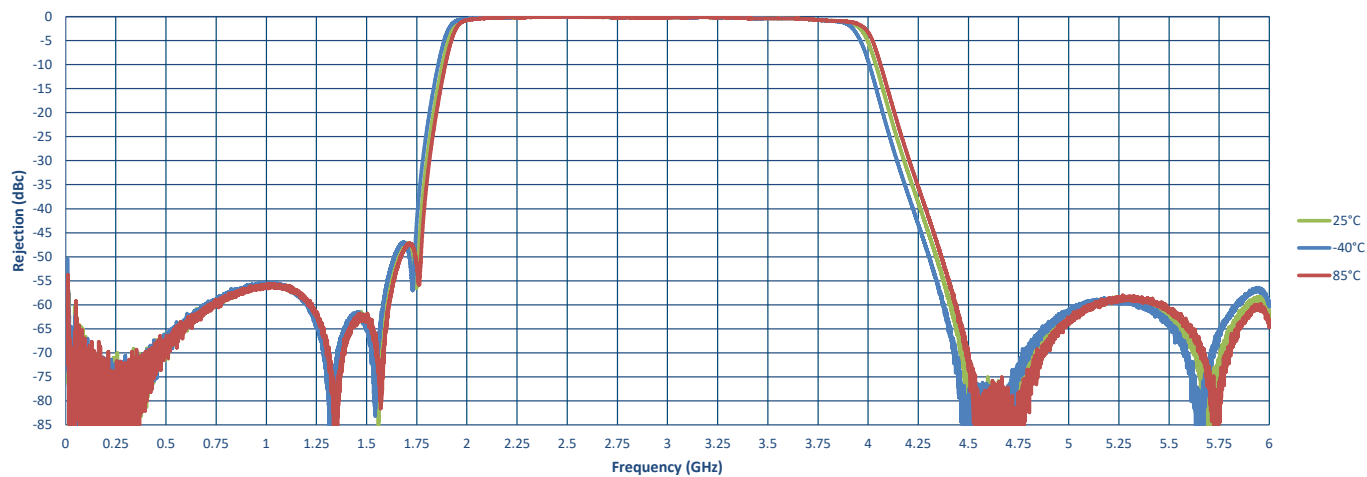


Band 1 - Rejections Extended

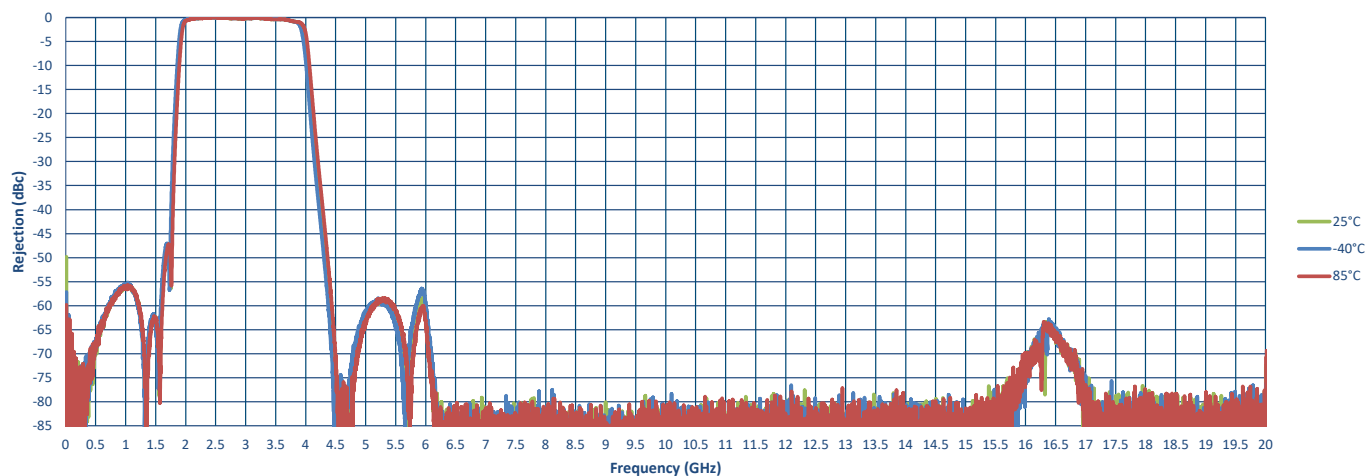


Band 2 - Passband Return Loss - S11

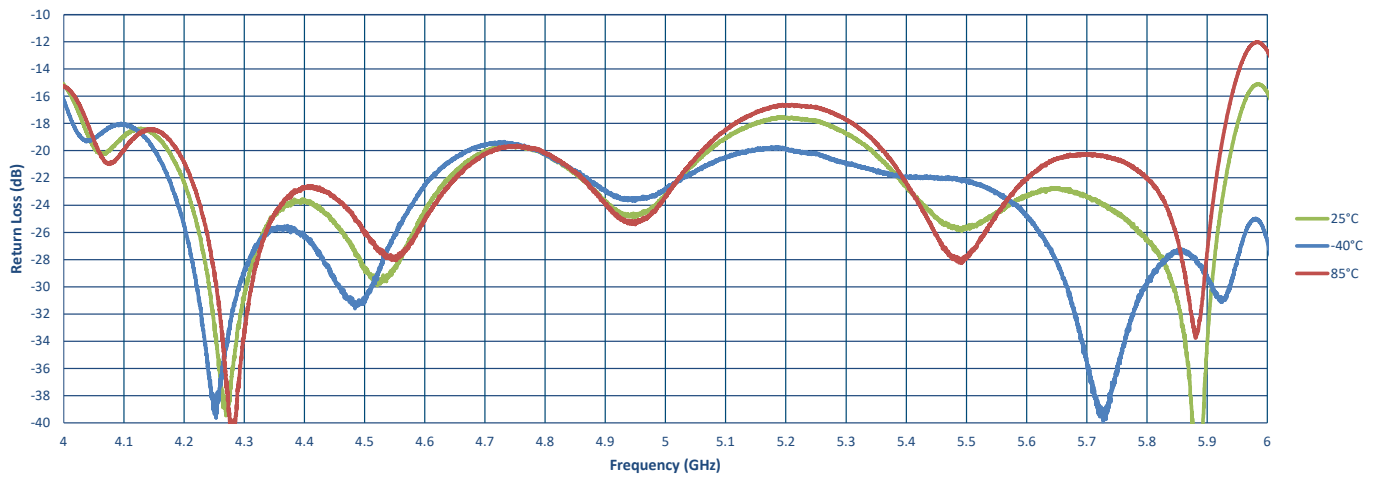

Band 2 - Passband Return Loss - S22

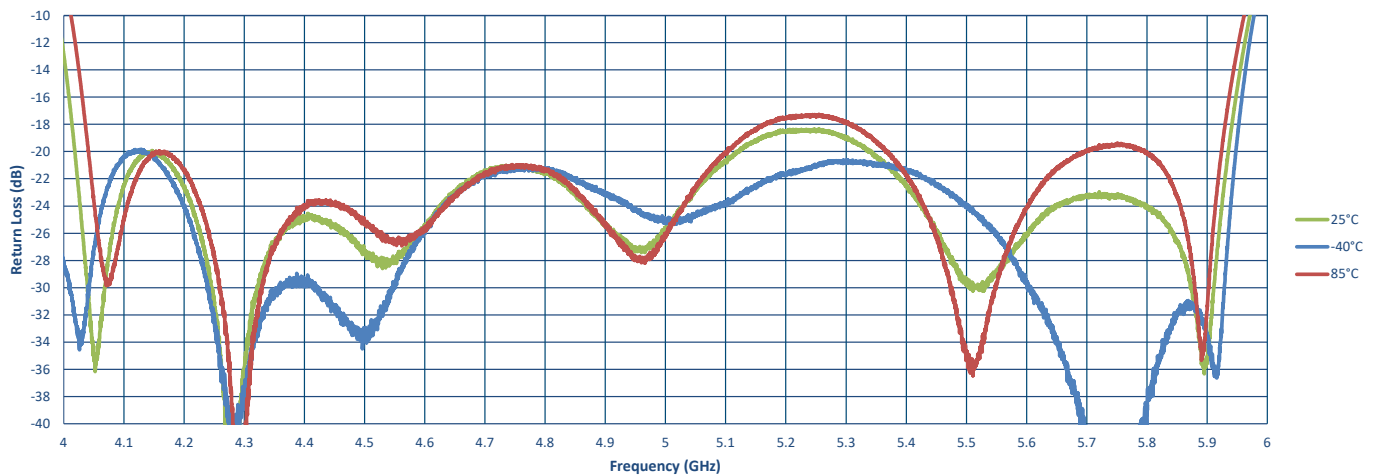


Band 2 - Passband Insertion Loss

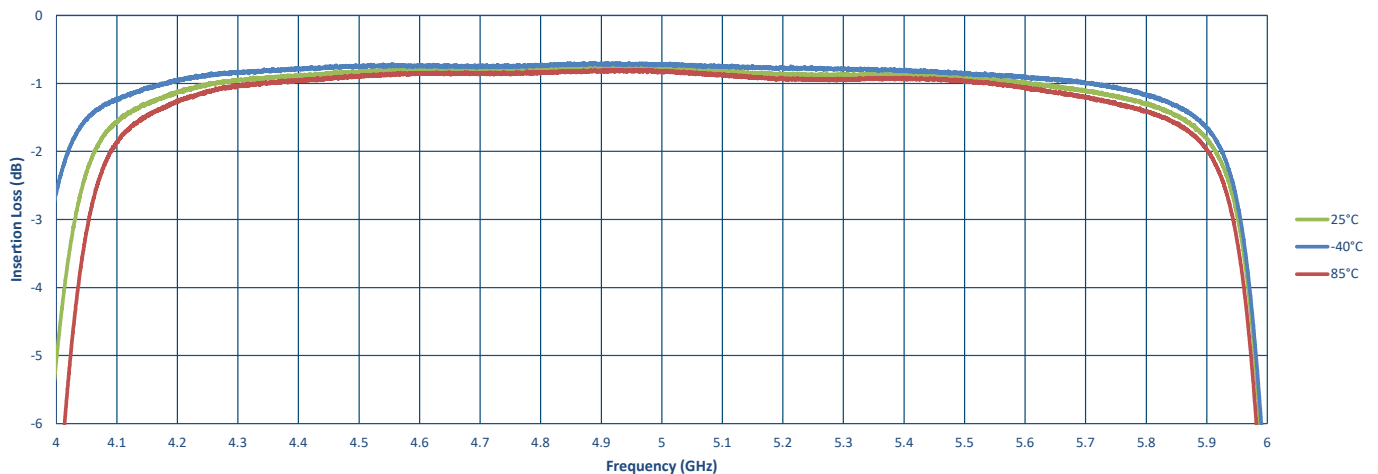


**SUMMARY TEST DATA
ON
P5P-218-S6F**


Band 2 - Rejections

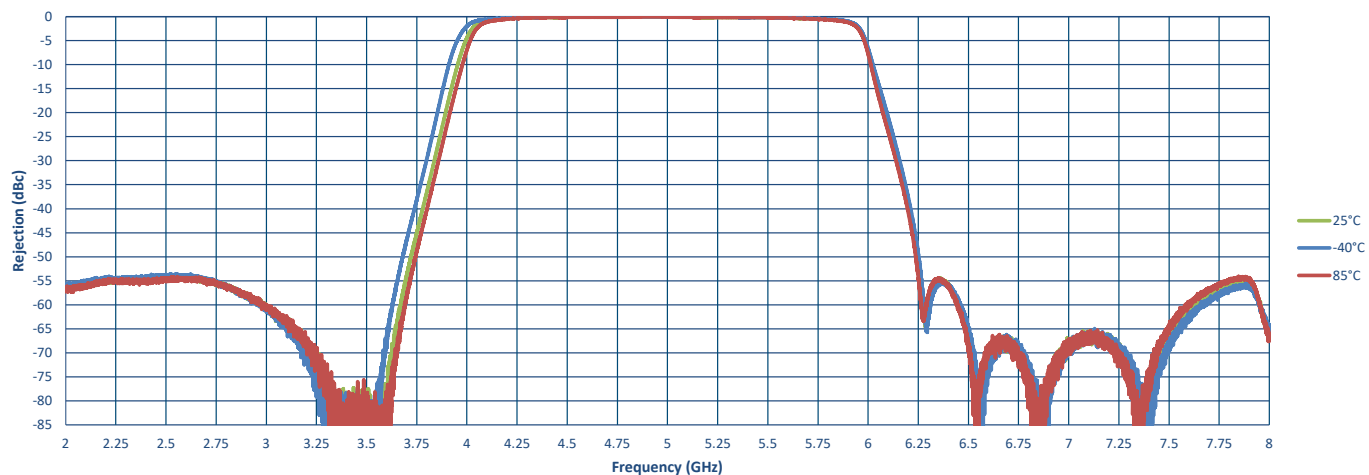


Band 2 - Rejections Extended

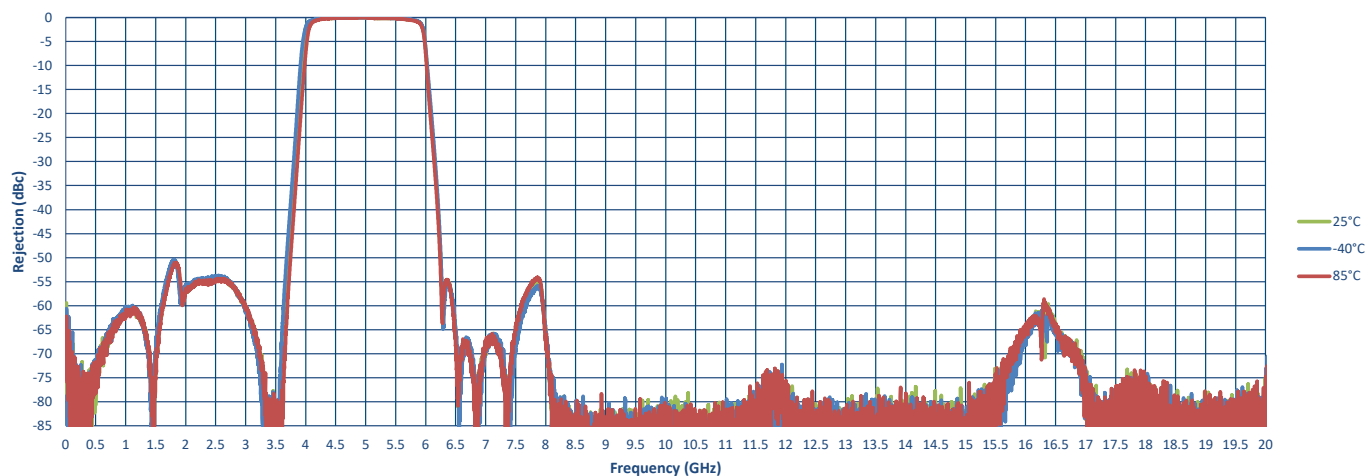


Band 3 - Passband Return Loss - S11

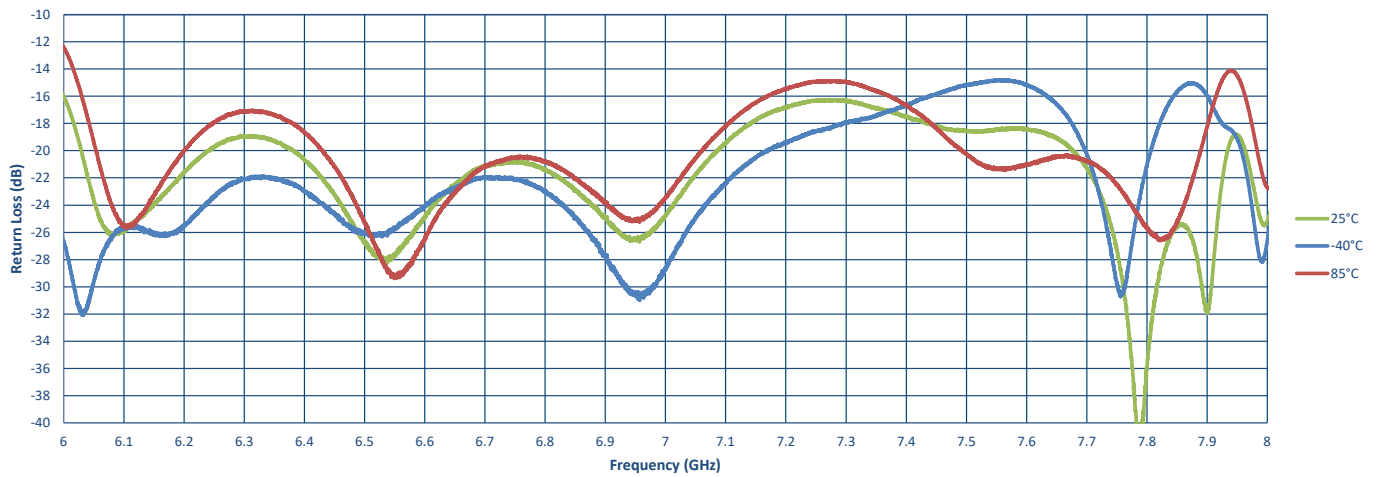


Band 3 - Passband Return Loss - S22

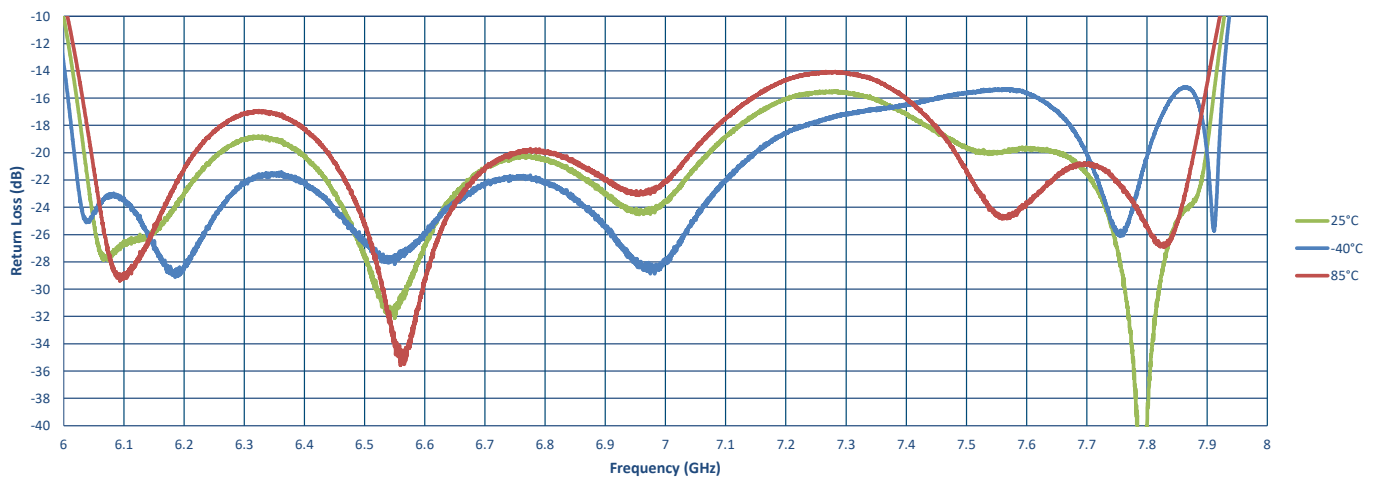


Band 3 - Passband Insertion Loss

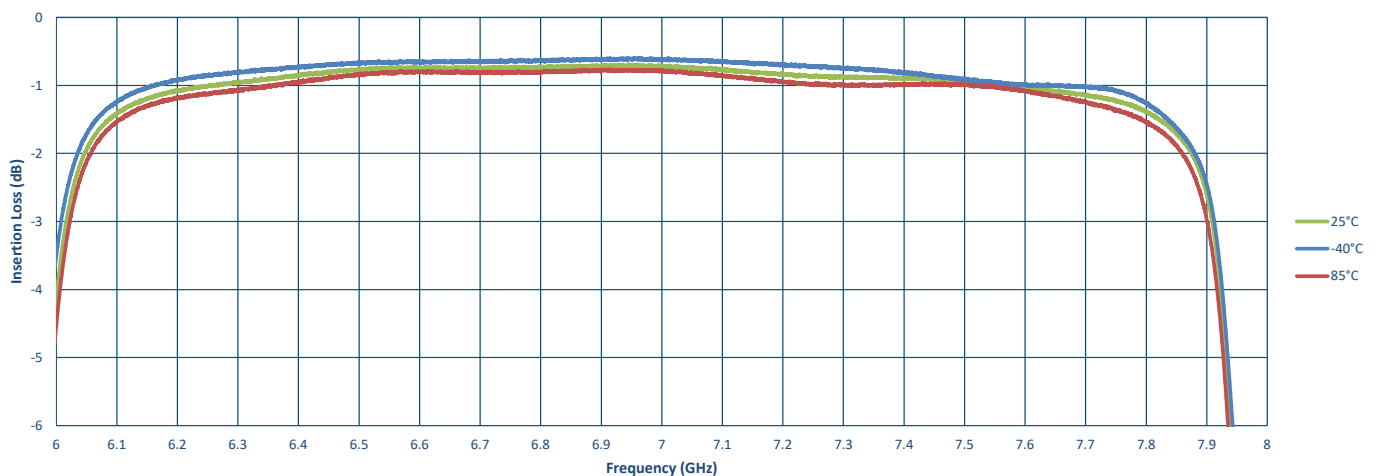


Band 3 - Rejections

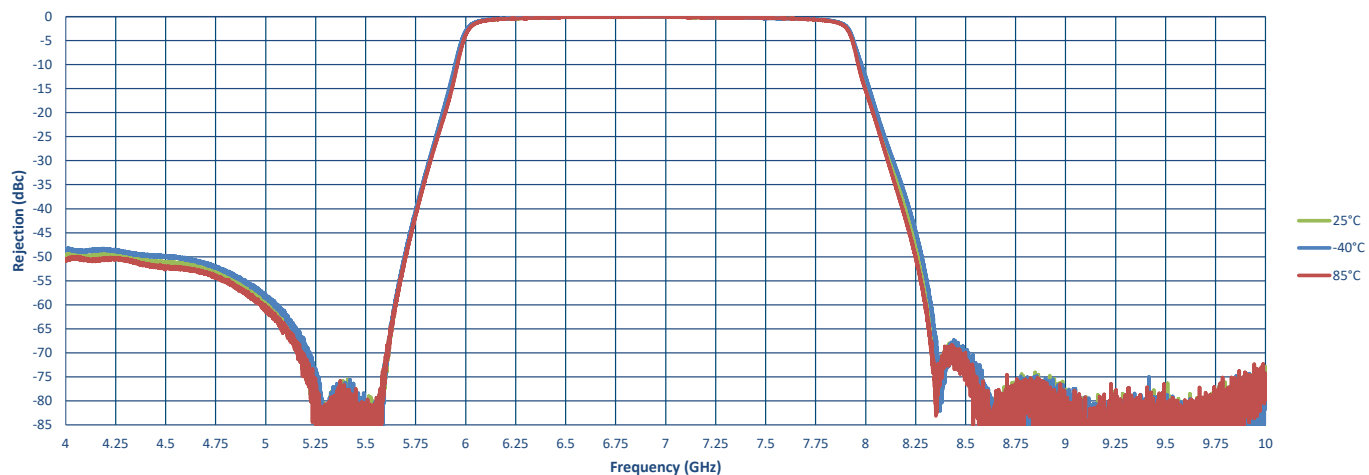


Band 3 - Rejections Extended

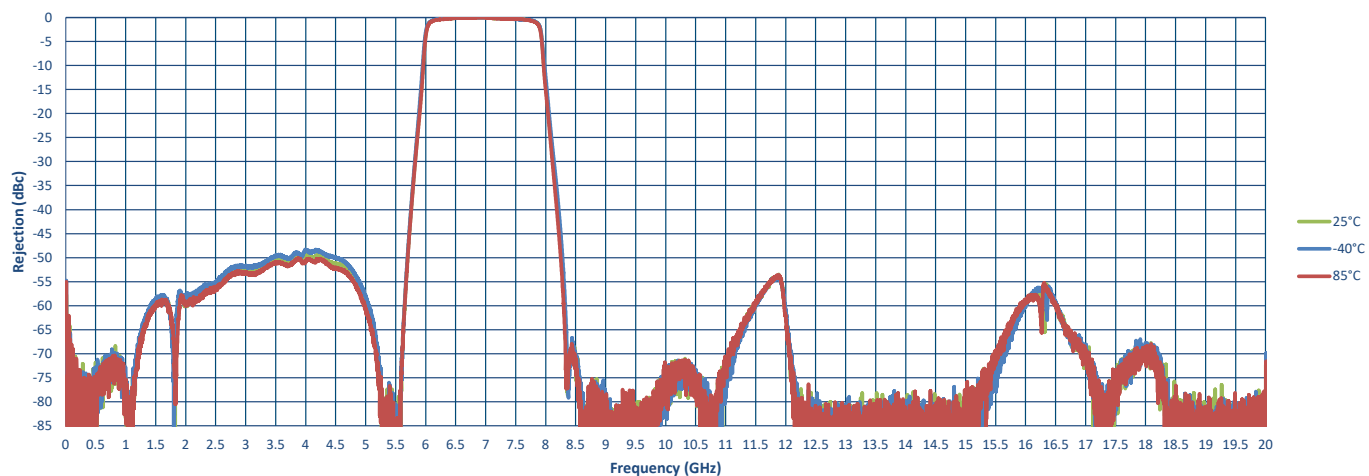


Band 4 - Passband Return Loss - S11

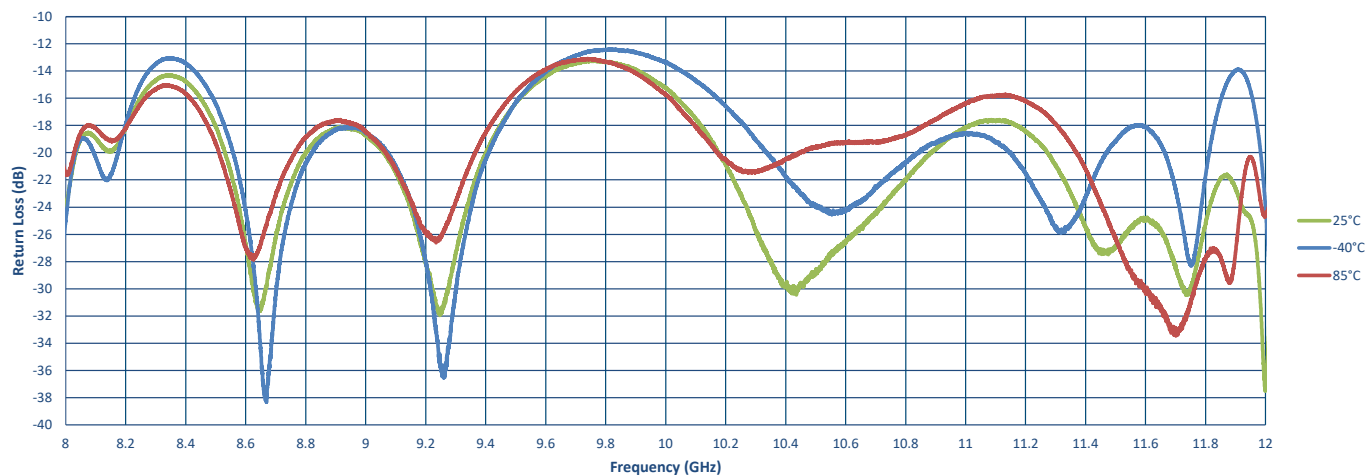


Band 4 - Passband Return Loss - S22

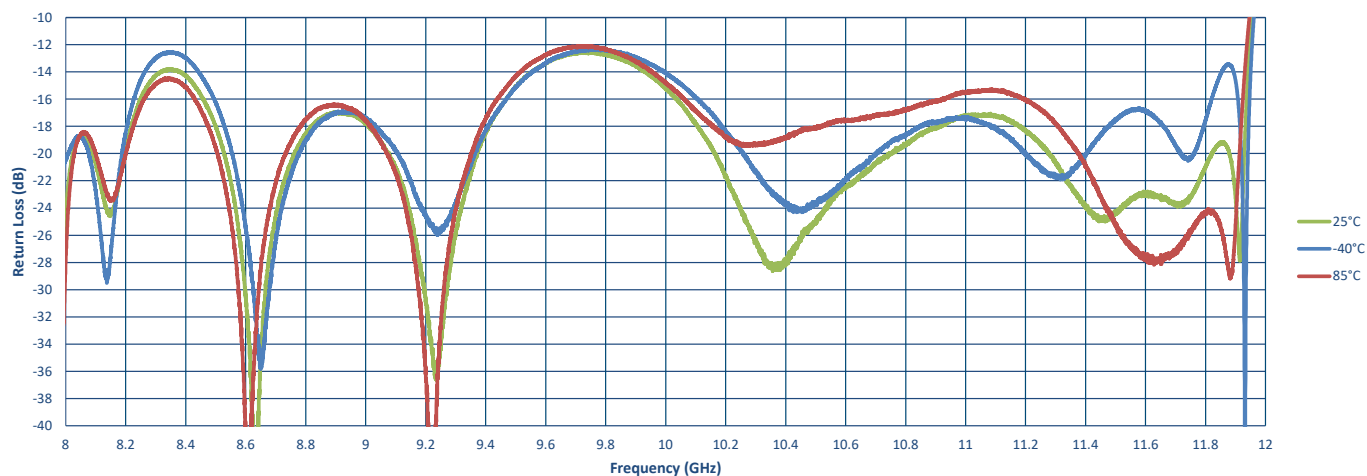


Band 4 - Passband Insertion Loss

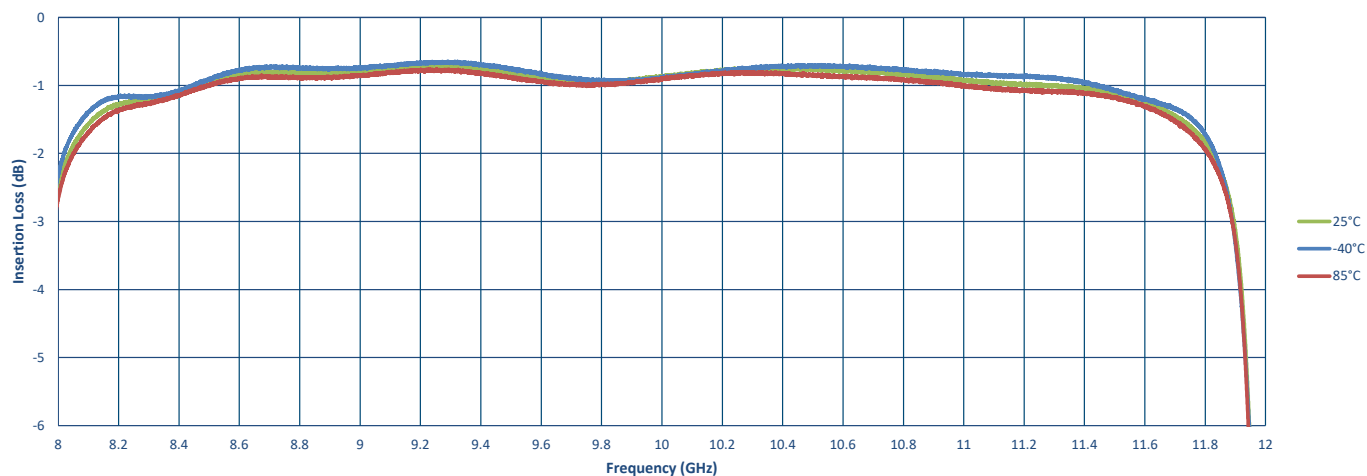


Band 4 - Rejections

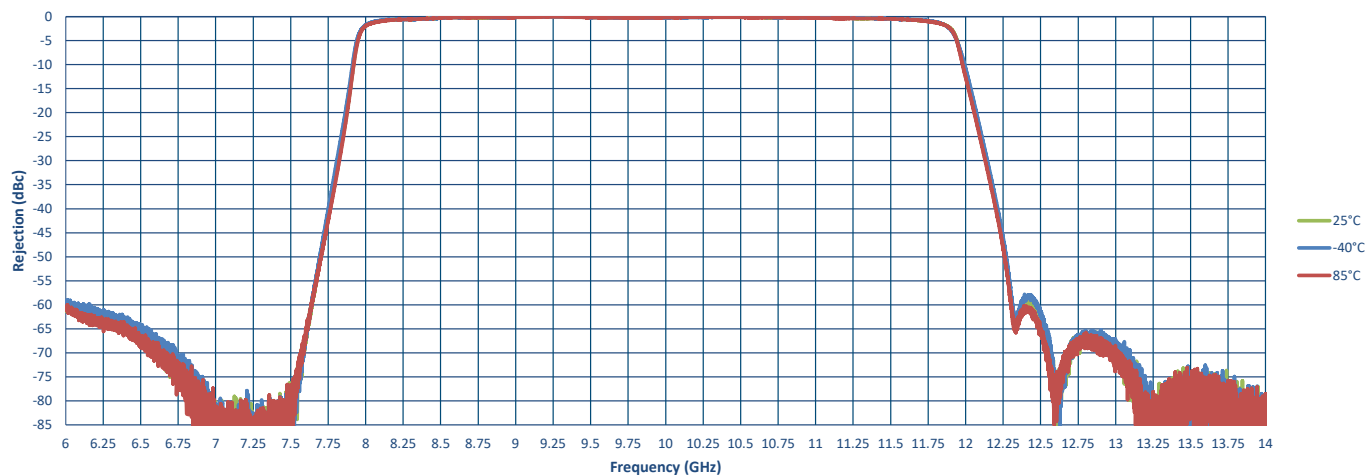


Band 4 - Rejections Extended

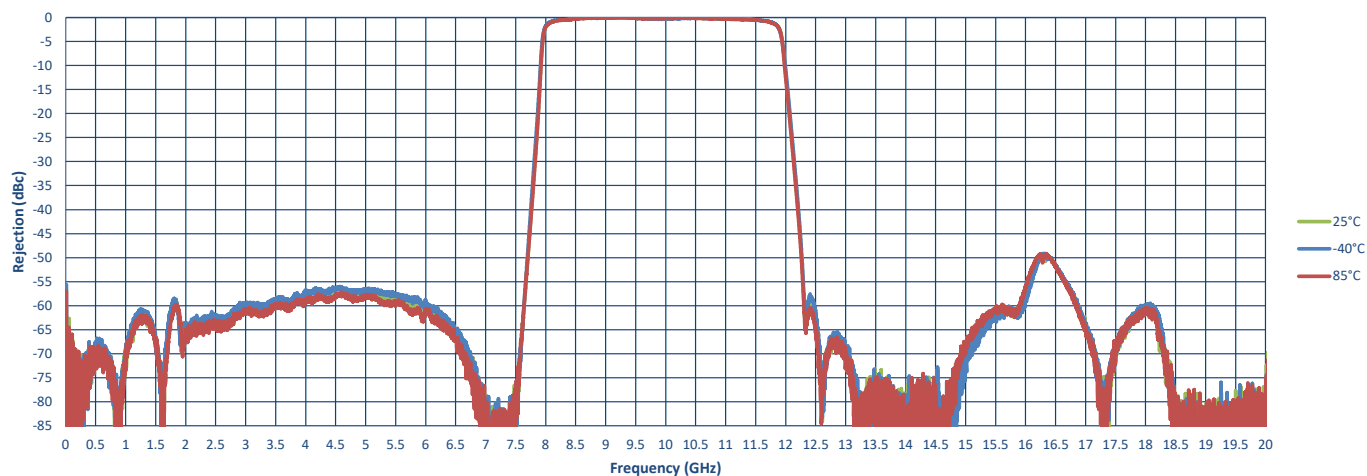


Band 5 - Passband Return Loss - S11

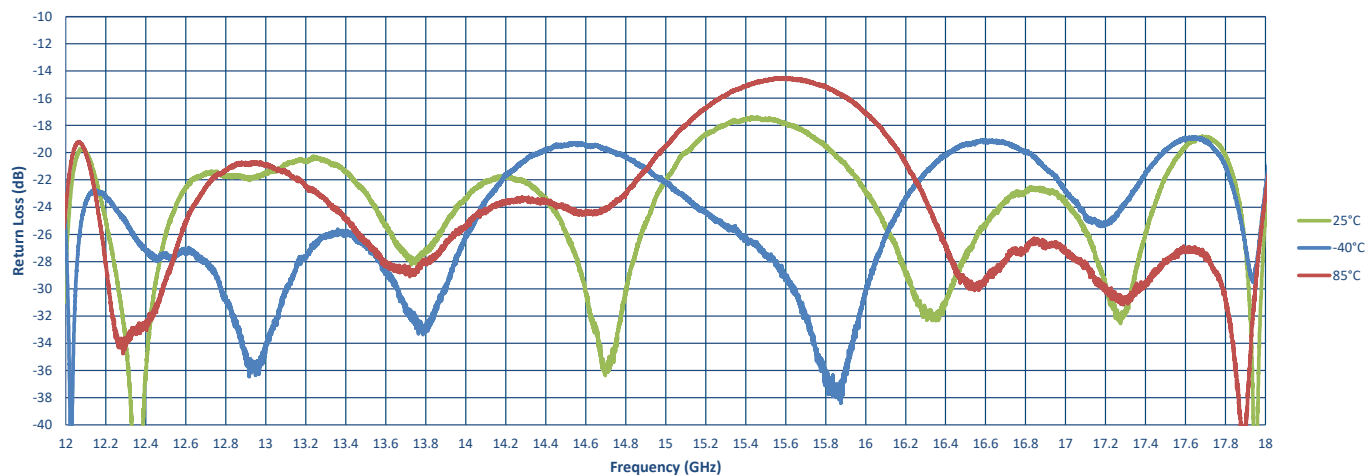

Band 5 - Passband Return Loss - S22

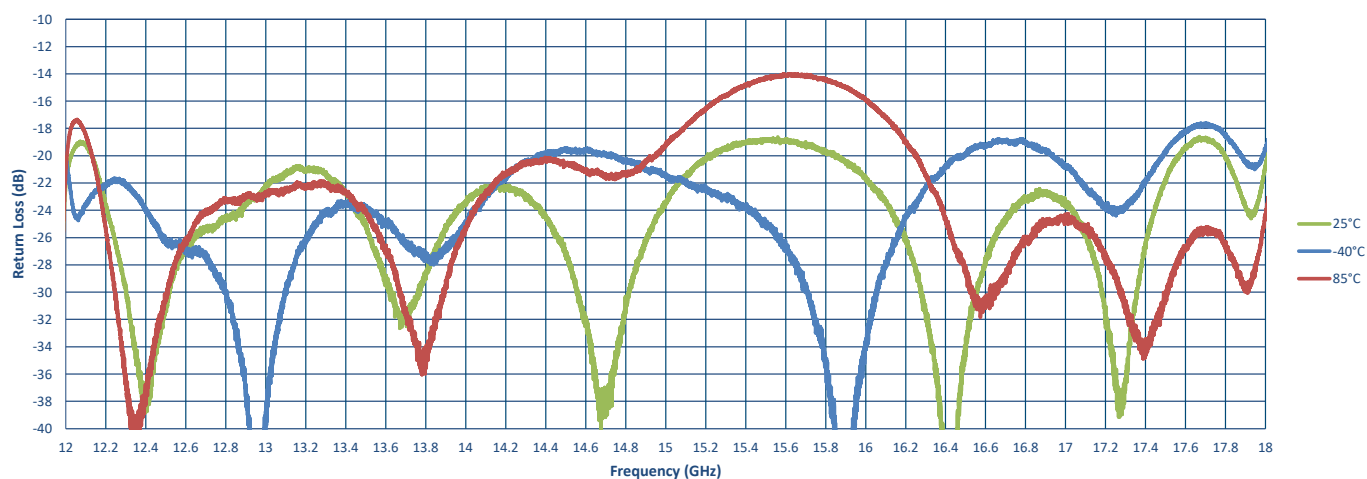


Band 5 - Passband Insertion Loss

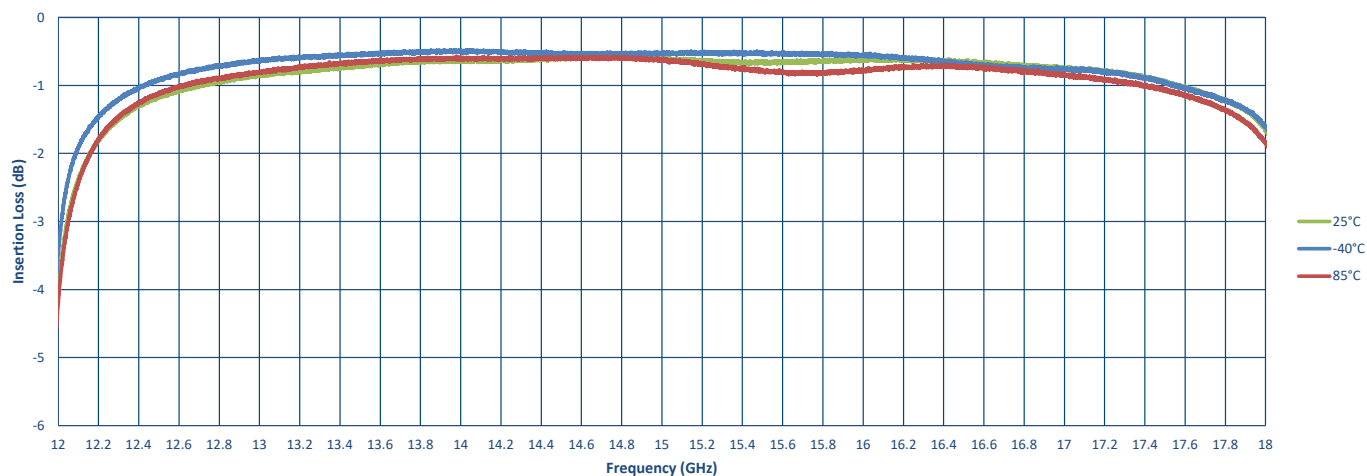

**SUMMARY TEST DATA
ON
P5P-218-S6F**

Band 5 - Rejections

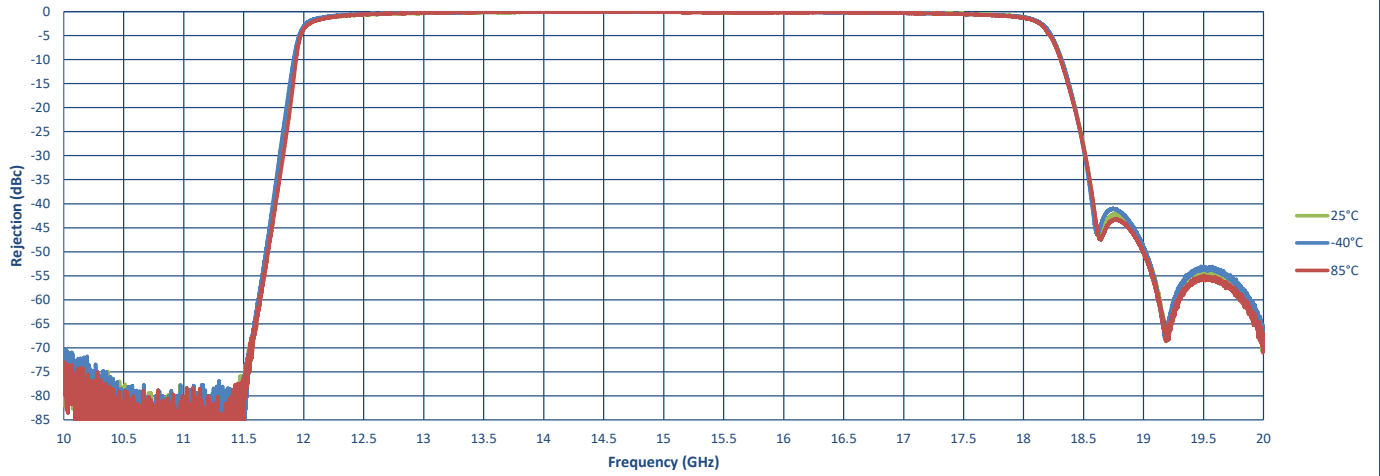

Band 5 - Rejections Extended

