


THIS DRAWING DESCRIBES TRADE SECRETS  
AND IS THE EXCLUSIVE PROPERTY OF  
MICROWAVE FILTER CO., INC.

REVISION			
LTR	ECN	DATE	APPR'D
B	-	12/98	PM
C	-	12/98	MW
D	4979	7/18	PMB

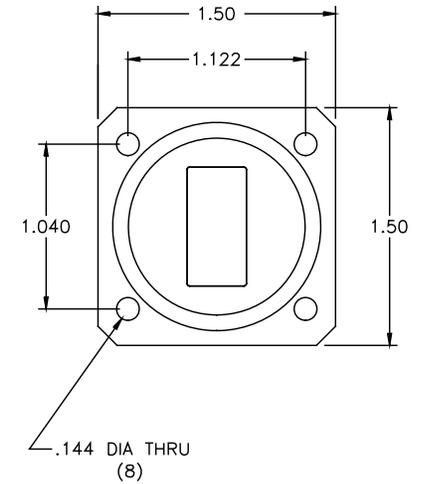

SPECIFICATIONS

PASSBAND: 10.7-12.2 GHz

LOSS: .25 db APPROX.

PASSBAND RIPPLE: .1 db

PASSBAND VSWR: 1.25:1 MAX.

POWER: -50 dbm

REJECTION: 50 db MIN. AT 12.75 GHz

PRESSURIZATIONS: 5 psi MAX.

OPERATING TEMPERATURE: -30°C TO +60°C

CONNECTORS: WR75 GROOVED COVER FLANGES

OUTDOOR USE

ALL SPECIFICATIONS  
UNLESS SPECIFIED  
±.030

ENVELOPE DRAWING

 MICROWAVE FILTER CO. INC. 6743 KINGS ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE	7/18	TITLE	
DWN BY	PM	BANDPASS FILTER	
ENGINEER	ND	SIZE	DRAWING NO.
		B	13208-1
		REV	D