

**SUMMARY TEST DATA  
ON  
JTIDS-0001**

CUSTOMER: \_\_\_\_\_  
 SO: \_\_\_\_\_  
 MODEL NO: JTIDS-0001  
 SERIAL NO: PL56876/2550


TESTED BY: E. Kretz  
 TEMPERATURE: +25°C  
 DATE: 12/3/2025  
 DRAWING NO: 27652740      REV: A1

TEST ITEM NO:	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Center Frequency	1085 MHz	<b>1085 MHz</b>	
2	Notched Bandwidth	250 MHz	<b>250 MHz</b>	
3	Passband Insertion Loss	6.0 dB MAX (DC - 910 MHz, 1260 - 2000 MHz)	<b>4.2 dB (DC to 910 MHz)</b>	
			<b>4.11 dB (1260 to 2000 MHz)</b>	
			<b>See Graph</b>	
4	Passband VSWR	2.0:1 TYP 3.5:1 MAX AT PASSBAND EDGES	<b>3.45 :1</b> <b>See Graph</b>	
5	Rejection	-40 dBC MIN @ 960 to 1210 MHz	<b>40.09 dBC</b> <b>See Graph</b>	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731  
 Email: sales@pmi-rf.com

# SUMMARY TEST DATA ON JTIDS-0001

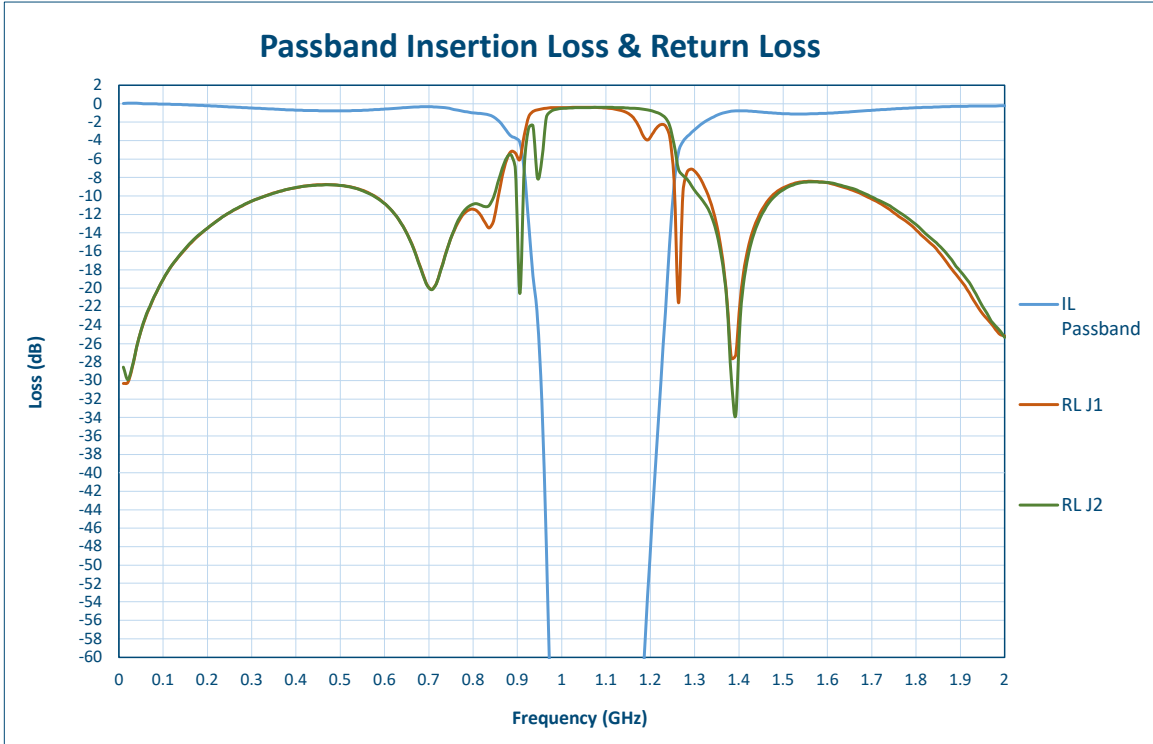

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731  
Email: sales@pmi-rf.com