

**SUMMARY TEST DATA
ON
JTIDS-0001**

CUSTOMER: _____
SO: _____
MODEL NO: JTIDS-0001
SERIAL NO: PL56877/2550


TESTED BY: E. Kretz
TEMPERATURE: +25°C
DATE: 12/3/2025
DRAWING NO: 27652740 REV: A1

TEST ITEM NO:	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Center Frequency	1085 MHz	1085 MHz	
2	Notched Bandwidth	250 MHz	250 MHz	
3	Passband Insertion Loss	6.0 dB MAX (DC - 910 MHz, 1260 - 2000 MHz)	3.67 dB (DC to 910 MHz)	
			4.25 dB (1260 to 2000 MHz)	
			See Graph	
4	Passband VSWR	2.0:1 TYP 3.5:1 MAX AT PASSBAND EDGES	3.09 :1 See Graph	
5	Rejection	-40 dBC MIN @ 960 to 1210 MHz	42.53 dBC See Graph	

QA/QC Approval: _____ Date: _____

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com

**SUMMARY TEST DATA
ON
JTIDS-0001**

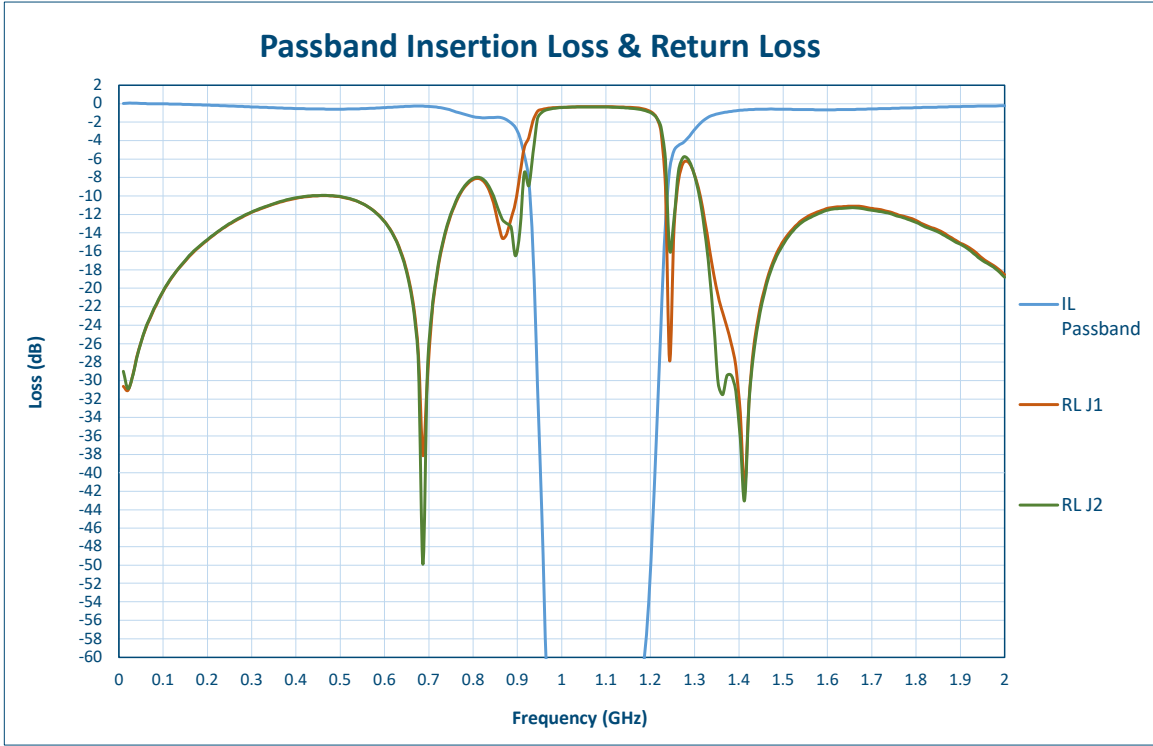

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com