

DESCRIPTION:

PMI MODEL NUMBER DTA-0R4G18G-60-CD-1 IS A NON-REFLECTIVE 10 BIT PROGRAMMABLE 60 dB PIN DIODE ATTENUATOR WITH STEP RESOLUTION AS LOW AS 0.06 dB OVER THE FREQUENCY RANGE OF 0.4 TO 18.0 GHz. THIS MODEL IS OFFERED IN A SLIM LINE HOUSING MEASURING ONLY 0.5" HEIGHT.

SPECIFICATIONS:



- FREQUENCY: _____ 0.4 GHz TO 18.0 GHz
- MEAN ATTENUATION RANGE: _____ 60 dB
- INSERTION LOSS: _____ 4.8 dB MAX
- VSWR: _____ 2.0 :1 MAX
- FLATNESS UP TO:
 - 20 dB _____ ±1.0 dB TYP, ± 1.5 dB MAX
 - 40 dB _____ ±1.25 dB TYP, ± 1.75 dB MAX
 - 60 dB _____ ±3.0 dB TYP, ± 5.0 dB MAX
- ACCURACY OF ATTENUATION:
 - 0 dB TO 20 dB _____ ±1.0 dB MAX
 - 20 dB TO 40 dB _____ ±1.5 dB MAX
 - 40 dB TO 60 dB _____ ±2.0 dB MAX
- MINIMUM ATTENUATION STEP: _____ 0.06 dB
- OPERATING POWER: _____ 15 dBm MIN
- SURVIVAL POWER: _____ 1W Average from -65°C to +25°C
- SWITCHING TIME:
 - ON TIME _____ 1.0 us MAX
 - OFF TIME _____ 0.5 us MAX
- DC POWER SUPPLY: _____ +12 to 15V @ 150 mA MAX
- CONNECTORS: _____ 2 SMA & 15 PIN Micro-D-Female (ITT Cannon MDM15SSP or similar)
- WEIGHT: _____ 3.0 oz (85 gm) Approximate
- FINISH: _____ PAINTED BLUE
- LOGIC INPUT:
 - LOGIC "0" (BIT OFF) _____ -0.3 to +0.8V
 - LOGIC "1" (BIT ON) _____ +2.0 to +5.0V

ENVIRONMENTAL RATINGS:

- TEMPERATURE: _____ -55°C TO +85°C (OPERATING)
 _____ -57°C TO +85°C (STORAGE)
- HUMIDITY: _____ MIL-E-5400T 3.2.24.4, 5 TO 95% RH
- SHOCK: _____ MIL-E-5400T 3.2.24.6.1, 15G 11 ± 1 ms 6 DIRECTIONS
- VIBRATION: _____ MIL-E-5400T 3.2.24.5, FIGURE 2 SHEET 1 OF CURVE III
- ALTITUDE: _____ UP TO 10,000 m

PIN NO:	J3 PIN FUNCTIONS
1	2dB
2	1dB
3	0.5dB
4	0.25dB
5	GND
6	0.13 dB
7	0.06 dB (LSB)
8	GND
9	Not Used
10	Not Used
11	+12 to 15VDC
12	32dB (MSB)
13	16dB
14	8dB
15	4dB

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	9/5/19	
	A2	ECN # 20-0050	03/11/20	
	B1	ECN # 24-0310	10/30/24	

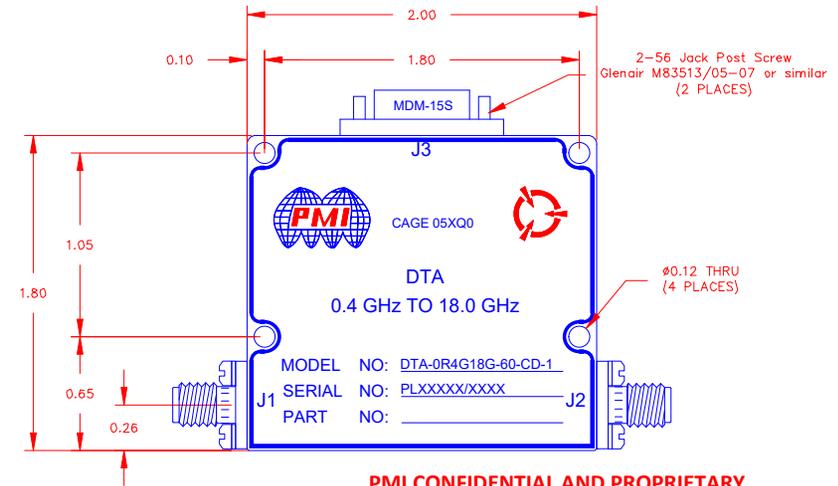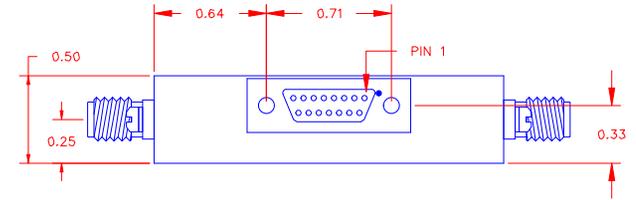

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-F GROVE ROAD
 FREDERICK, MARYLAND 21704 USA
 TEL: 301-662-5019 FAX: 301-662-1731
 WEBSITE: www.pmi-rf.com
 E-MAIL: sales@pmi-rf.com
 ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN NJA		9/5/19	PRODUCT FEATURE DTA-0R4G18G-60-CD-1		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. 27037160
ISSUED			SCALE N:S		SHEET 1 OF 1
					REV. B1

ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 X.XX ±0.020
 X.XXX ±0.010

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION