
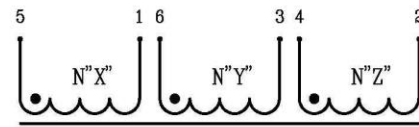
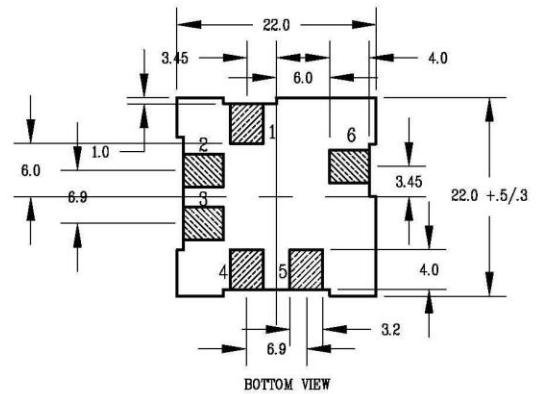


# A3D22-XXXX

## SMT 3-D Transponder Coil

- Antenna applications
  - Keyless entry, Keyless go, RFID
- Compact design, Isotropic
- Reflow solder rating: 260°C for 10sec
- Operating temperature: -0°C to +70°C
- RoHS compliant per 2011/65/EU
- Custom values available

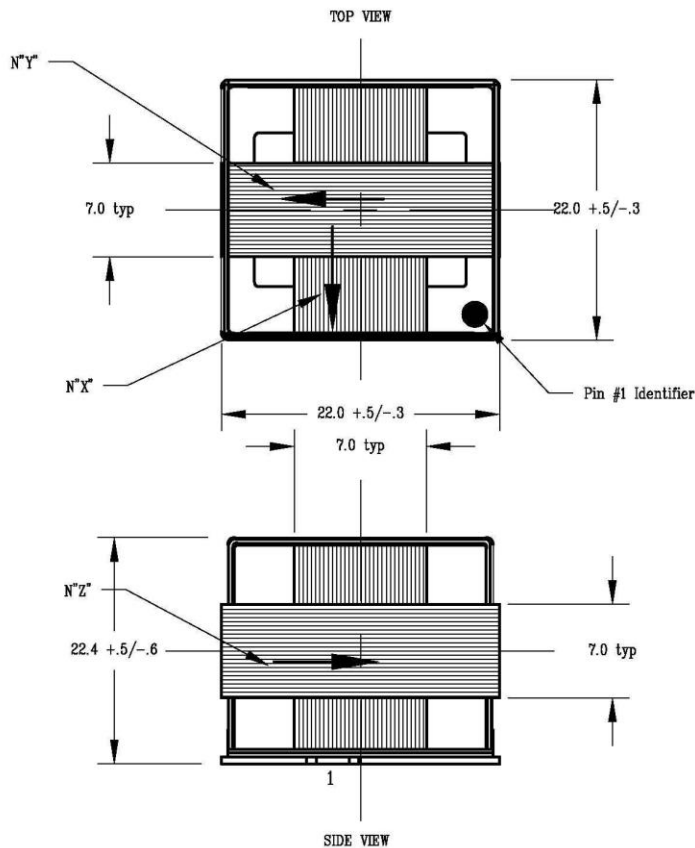

Dash #	“L” (uH) $\pm 7\%$ N1 / N2 / N3	Test Freq. (kHz)	“Q” Typ. (3plcs)	“DCR” ( $\Omega$ ) max
-0001	40.0 / 40.0 / 40.0	25	18	450