

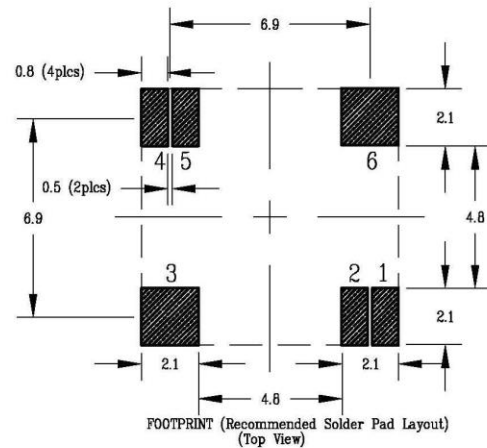


A3D9-XXXX

SMT 3-D Transponder Coil

- Antenna applications
 - Keyless entry, Keyless go, RFID
- Compact design, Isotropic
- Reflow solder rating: 260°C for 10sec
- Operating temperature: -0°C to +70°C
- RoHS compliant per 2011/65/EU
- Custom values available

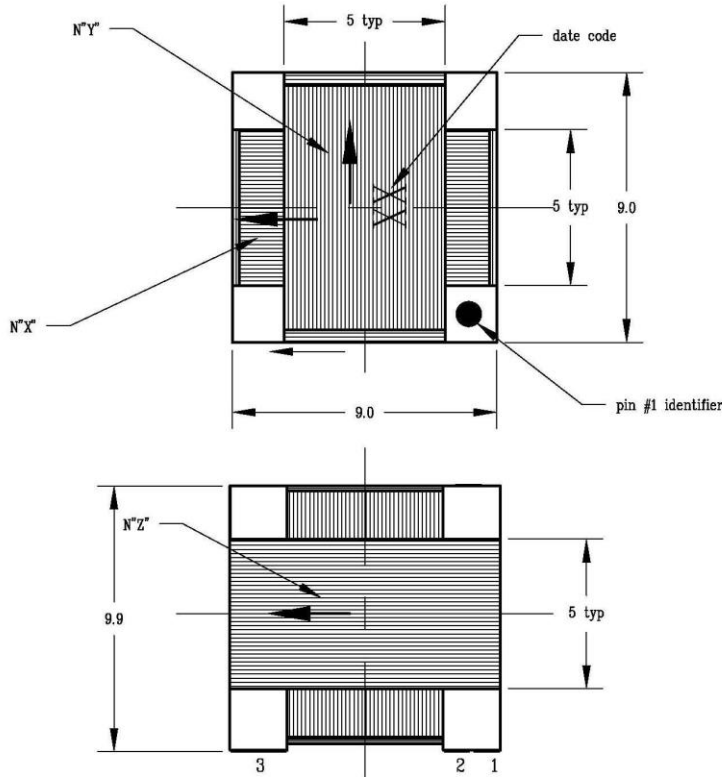

Dash #	“L” (mH) ± 5% N1 / N2 / N3	Test Freq. (kHz)	“Q” Typ. (3plcs)	“DCR” (Ω) max
-0001	15.8 / 15.8 / 15.8	25	15	260