


# AS62-XXXX

## SMT Transponder Coil

- Antenna applications, RFID
- Compact design, low height
- "Pick & place" surface
- Optional hot-melt adhesive for PWB bonding during solder reflow
- Reflow solder rating: 260°C for 10sec
- Operating temperature: -40°C to +125°C
- RoHS compliant per 2011/65/EU
- Custom values available

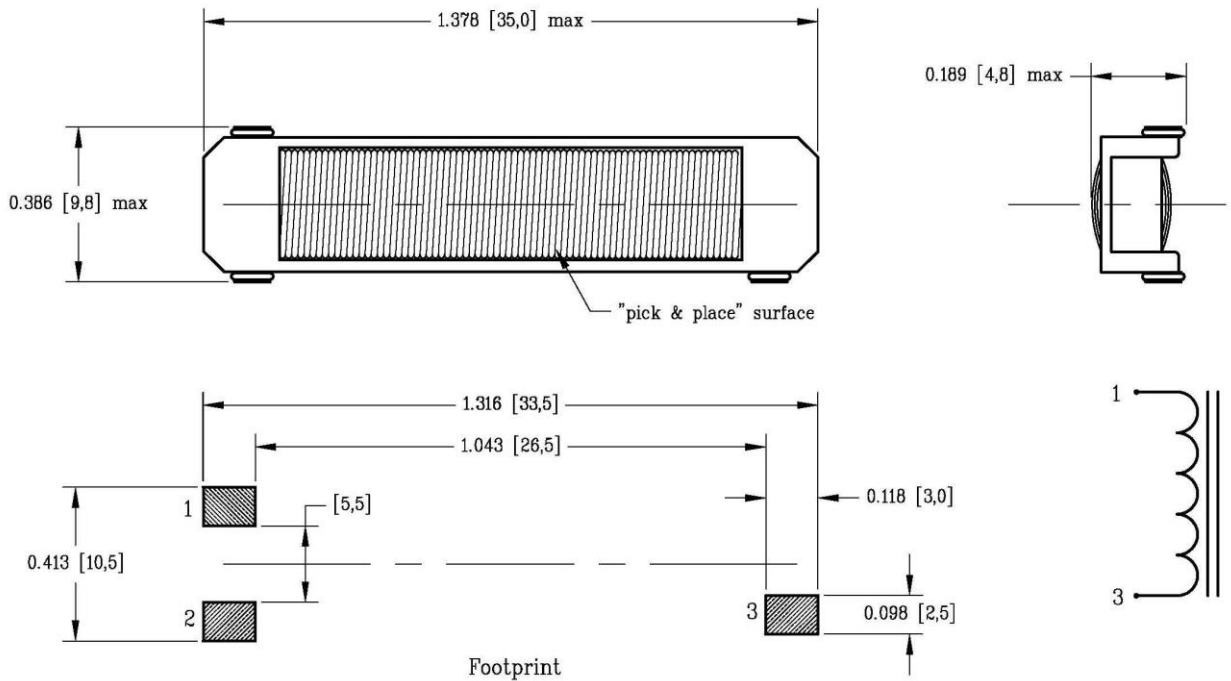

Dash #	"L" ± 5% (mH)	"Q" min (@125kHz)	"SRF" min (KHz)	"DCR" max (Ω)	Sensitivity (mV/A/m)min
-0040	0.400	100	1200	1.4	50
-0072	0.715	170	1200	1.3	60
-0096	0.960	170	1100	1.5	60
-0266	2.66	55	400	2.3	140
-0300	3.00	60	400	3.0	160
-0358	3.58	50	350	2.5	
-0720	7.2	50	300	5.0	