

## SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: APD-8-800M2D5G-SFF-30W  
 Serial No: 02899  
 Part No: \_\_\_\_\_

Tested By: Bryan K.  
 Temperature: +25 C  
 Date: 12/14/2020  
 Drawing No: 27637360 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	800 MHz – 2.5 GHz	800 MHz – 2.5 GHz	PMI QA 2	
2	Insertion Loss	≤ 1.2 dB (ABOVE 9.03 dB SPLIT)	0.77 dB See Plot		
3	VSWR Input/Output	1.40:1 MAXIMUM	1.25:1 See Plot		
4	Isolation	20 dB MINIMUM	23.19 dB See Plot		
5	Amplitude Balance	±0.5 dB MAXIMUM	0.06 dB See Plot		
6	Phase Balance	±5° MAXIMUM	0.18° Min -0.6° Max		
7	Power Handling	FORWARD 30 WATT MAXIMUM REVERSED 1 WATT MAXIMUM	See Typical Characteristics		
8	Impedance	50Ω	50Ω		PMI QA 2

Note: Amplitude and phase balance are relative to J2 Port.



QA/QC Approval: \_\_\_\_\_

PMI  
QA 2



Date: \_\_\_\_\_

12/15/20

**SUMMARY TEST DATA  
ON  
APD-8-800M2D5G-SFF-30W**

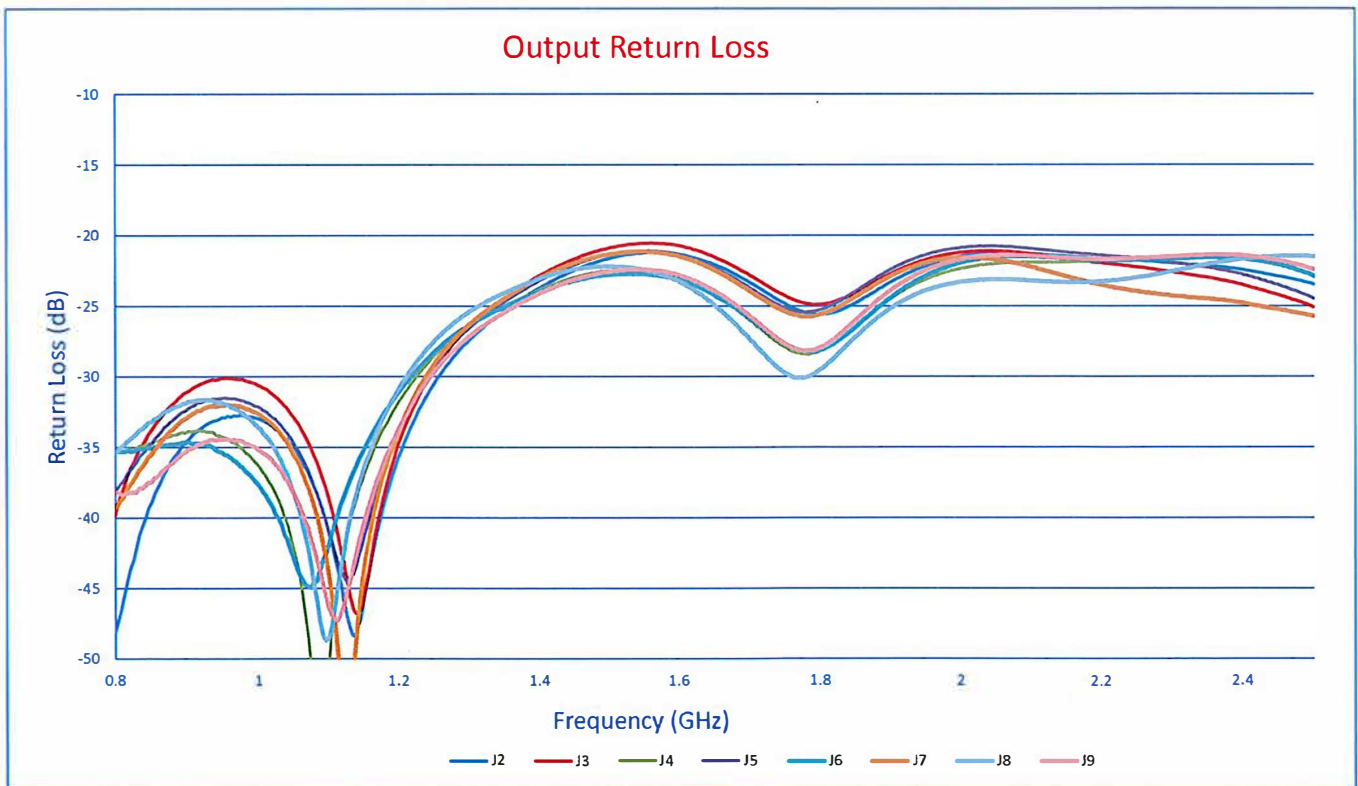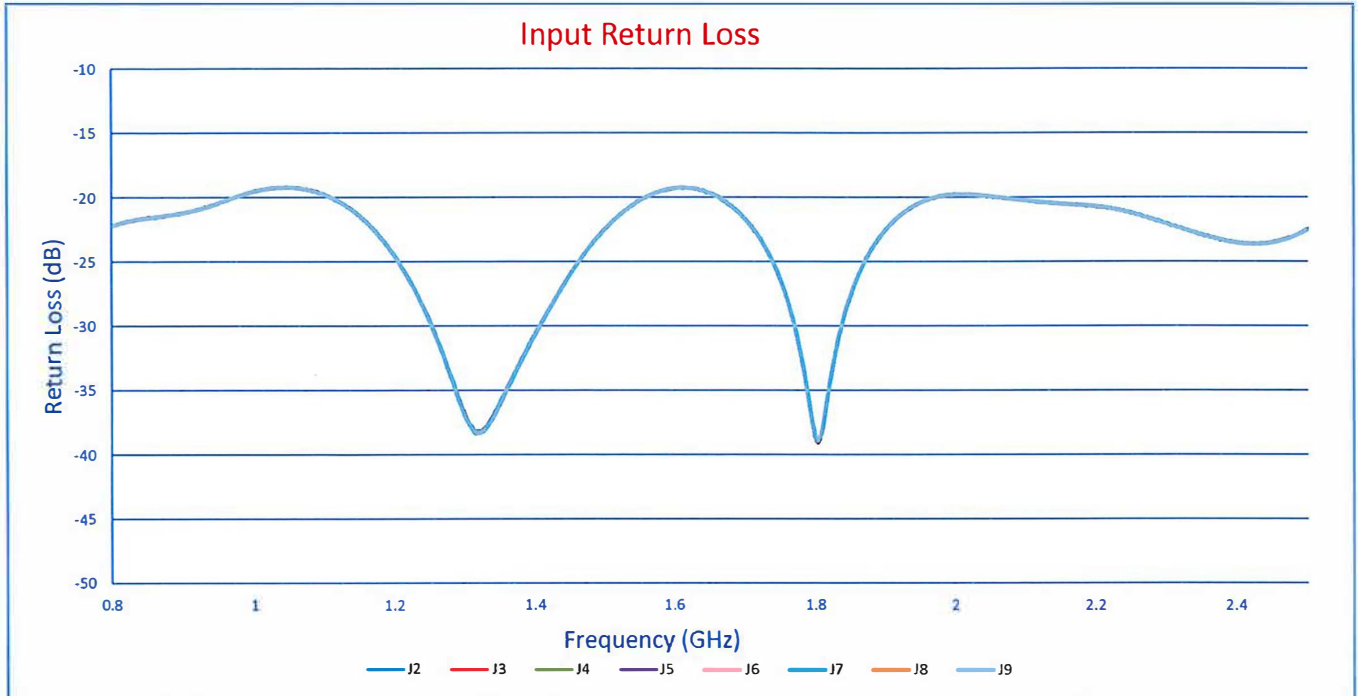

# SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

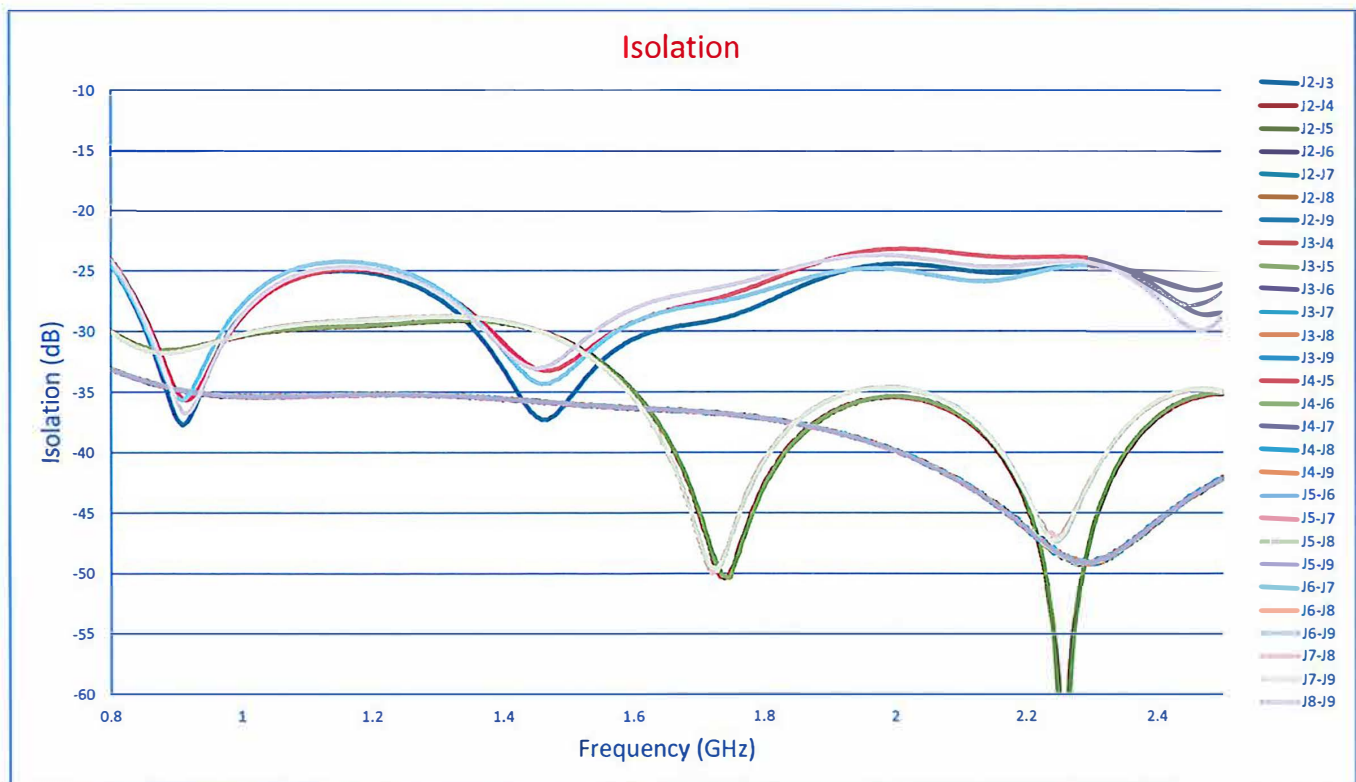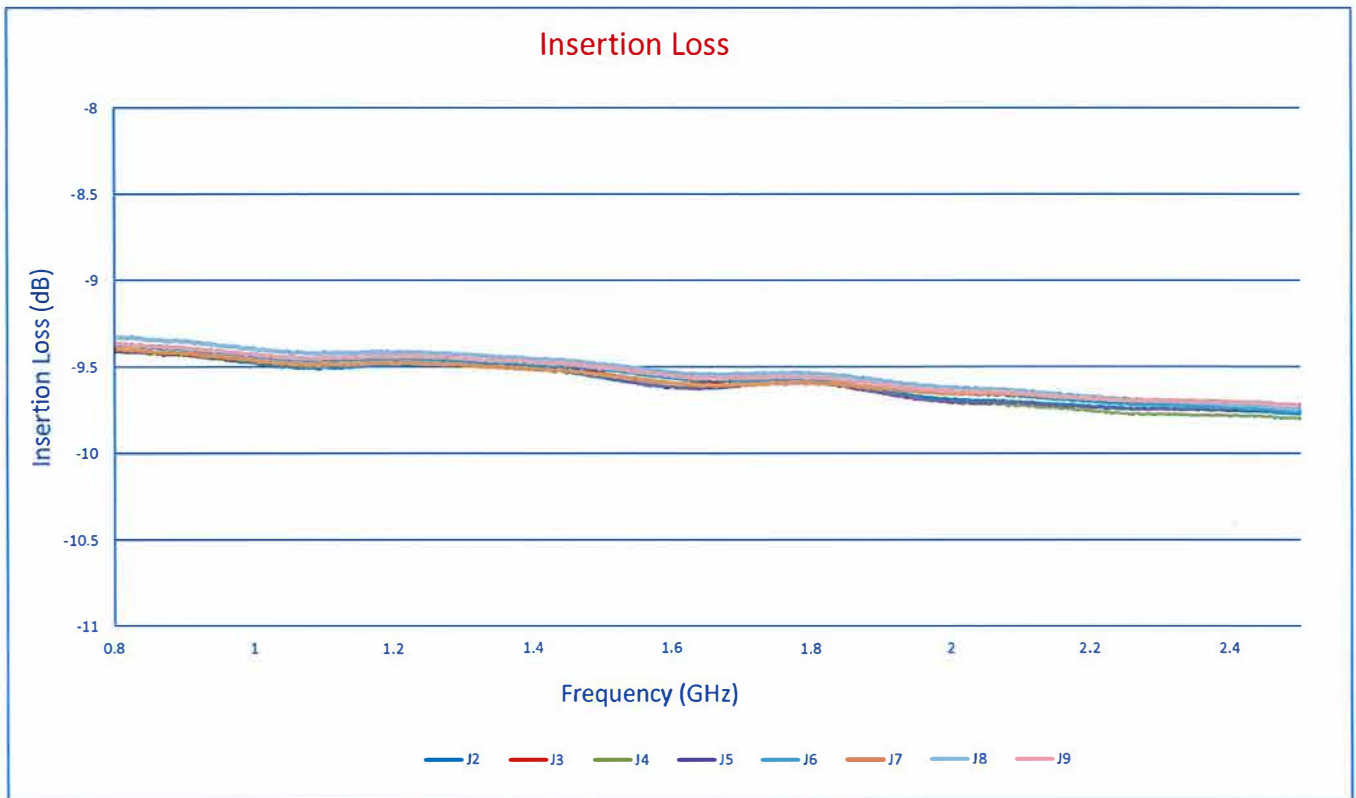

# SUMMARY TEST DATA ON APD-8-800M2D5G-SFF-30W

