


**DESCRIPTION:**

PMI model number 11CL19D25G-1D5G-CD-SFF is a combine filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	ORIGINAL RELEASE	12/5/02	

**SPECIFICATIONS:**

- CENTER FREQUENCY: . . . . . 19250MHz
- 1dB BANDWIDTH: . . . . . 18.5 TO 20.0 GHz
- VSWR IN THE PASS BAND: . . . . . 1.5:1 MAX.
- INSERTION LOSS (PASSBAND) . . . . . <= 3dB MAX.
- REJECTION @ 17400 MHz . . . . . 80 dB
- REJECTION FROM 21000 TO 40000 MHz . . . . . 80 dB

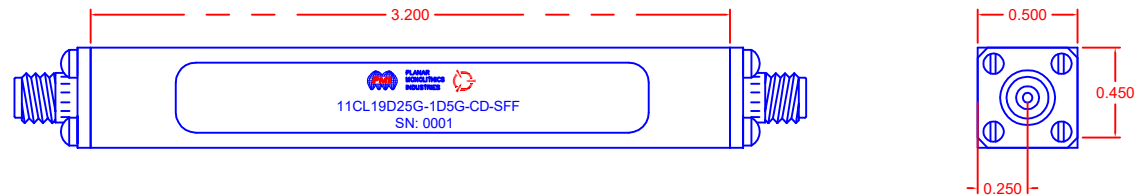

- CONNECTORS: . . . . . SMA FEMALE CONNECTORS
- SIZE . . . . . 3.20" (L) x 0.50" (W) x 0.50" (H)
- WEIGHT . . . . . 1 OZ. TYP.

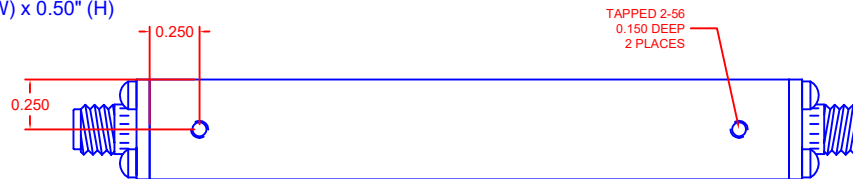


**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: . . . . . -55°C TO +85°C (OPERATING)  
-65°C TO +125°C (STORAGE)
- HUMIDITY: . . . . . MIL-STD-202F, METHOD 103B COND. B
- SHOCK: . . . . . MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: . . . . . MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: . . . . . MIL-STD-202F, METHOD 105C COND. B
- SALT FOG: . . . . . MIL-STD-202F, METHOD 107D COND. A
- FUNGUS: . . . . . MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: . . . . . MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.010  
X.XXX ±0.005

**CONFIDENTIAL AND PROPRIETARY**

PART NO. 155-1611		 PLANAR MONOLITHICS INDUSTRIES 7311-F GROVE RD FREDERICK, MARYLAND			
APPROVALS	DATE	TITLE			
DRAWN <i>S. PALAESTO</i>	12/5/02	PRODUCT FEATURE 11CL19D25G-1D5G-CD-SFF			
CHECKED		SIZE	FSCM NO.	DWG NO.	REV.
ISSUED		A	1QJWO	155-1611	-
		SCALE	N/S	SHEET	1 of 1