

SUMMARY TEST DATA ON LM-218-14-200W-SMF

Customer: _____
SO No: _____
Model No: LM-218-14-200W-SMF
Serial No: 24041
Part No: _____

Tested By: John R.
Temperature: +25°C
Date: 11/23/2022
Drawing No: 27610986 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC <i>PMI</i> <i>QA2</i>
1	Frequency Range:	2 GHz to 18 GHz	2 GHz to 18 GHz	<i>PMI</i> <i>QA2</i>
2	Insertion Loss: @ -10 dBm Input	2.0 dB Max. 1.5 dB Typ.	1.84 dB See Graph	
3	VSWR: @ -10 dBm Input	2.0:1 Max. 1.5:1 Typ.	In 1.56:1 Out 1.57:1 See Graph	
4	Leakage: @ 1 Watt CW Input	+14 dBm Max. +10 dBm Typ.	+13 dBm See Typical Characteristics	
5	Recovery Time:	100 ns MAX @ 1Watt CW	Pass See Typical Characteristics	
6	Average Power:	1 Watt CW	Pass See Typical Characteristics	
7	Peak Power:	200 Watts, 1 usec. 0.1% Duty Cycle	Pass See Typical Characteristics	
8	Limiting Threshold:	+6 dBm Typ.	+4 dBm See Graph	<i>PMI</i> <i>QA2</i>

QA/QC Approval:

[Signature] *[Signature]*

PMI
QA2


Date:

11/23/2022


SUMMARY TEST DATA ON LM-218-14-200W-SMF

24041

Insertion Loss @ -10 dB

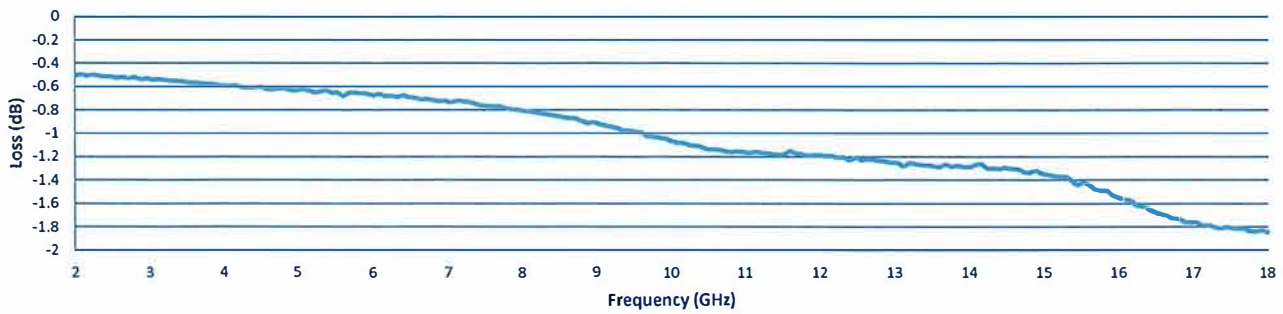

VSWR @ -10 dB

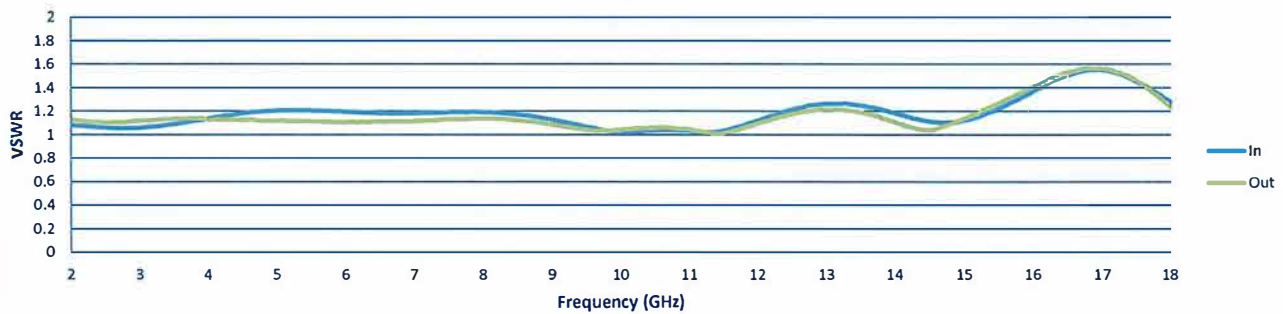

Limiter Response with Frequency

