

Description:

PMI Model Number: PE2-25-218-20-12-SFF is a 2 to 18 GHz low noise amplifier. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component.

This model provides the following performance. Data is available upon request.

Specifications:

Frequency Range:	2 to 18 GHz
Gain:	25dB Min.
Gain Flatness:	+/- 1.5dB Max.
Noise Figure:	4.5dB Typ, 5.5dB Max.
OP1dB:	+20dBm Min.
VSWR Input/Output:	2.0:1 Max.
DC Voltage Supply:	+12 to +15VDC
DC Current Draw:	350mA Max.
Connectors In/Out	SMA Female
RF Input Power:	+18 dBm MAX

Features:

Internal Voltage Regulation
Unconditional Stability

Available Options:

Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available


Environmental Ratings:

Temperature:	-55°C to + 85°C (Operating) -65°C to +125°C (Storage)
Humidity:	MIL-STD-202F, METHOD 103B COND B.
Shock:	MIL-STD-202F, METHOD 213B COND B.
Vibration:	MIL-STD-202F, METHOD 204D, COND. B
Altitude:	MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle:	MIL-STD-202F, METHOD 107D COND A


Note: The above specifications are subject to change or revision.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	12/15/10	
	B2	ECN # 20-0154	10/1/20	
	C1	ECN # 24-0351	12/09/24	

PE2 HOUSING WITH CARRIER

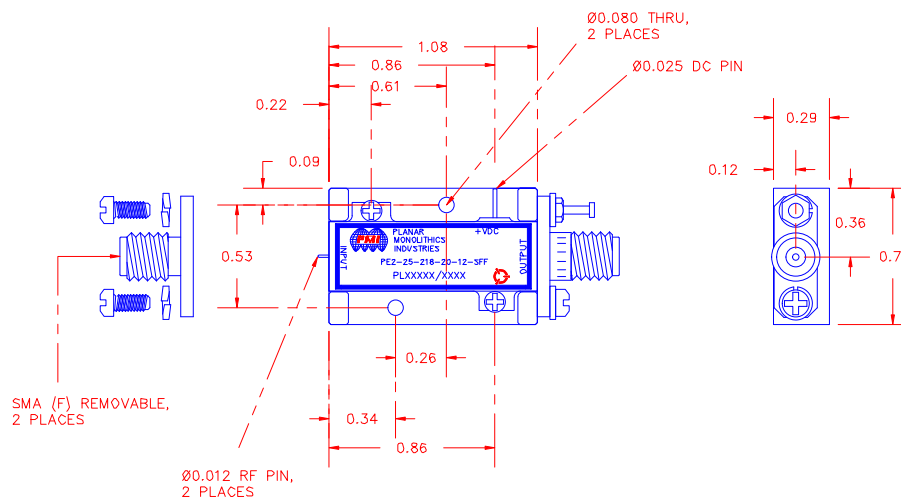

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

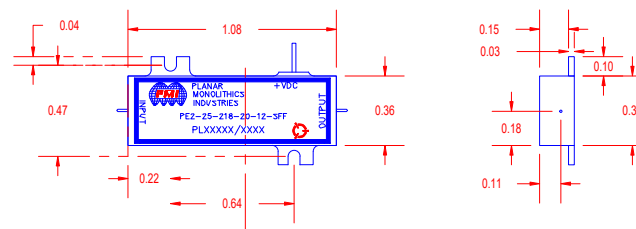

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

APPROVALS		DATE		TITLE	
DRAWN		DATE		PRODUCT FEATURE	
CHECKED		DATE		PE2-25-218-20-12-SFF	
ISSUED		DATE		REV.	
SCALE		N: S		SHEET	
SIZE		FSCM NO.		DWG NO.	
A		05XQ0		27004763	
C1				1 OF 1	