

DESCRIPTION

PMI MODEL SAA-500M18G-20DB-SFF IS A SWITCHED BIT ATTENUATOR OPERATING FROM 0.5 TO 18 GHz. DESIGNED TO BE SWITCHED BETWEEN A LOW LOSS STATE (2 dB LOSS TYPICAL) AND HIGH LOSS STATE (20 dB LOSS TYPICAL). THE SETTINGS ARE SELECTED BY A SINGLE CONTROL BIT.

SPECIFICATIONS

- FREQUENCY RANGE:..... 0.5 TO 18 GHz
- ATTENUATION:..... 20dB ±2.75dB NOMINAL
- INSERTION LOSS:..... 3dB MAX
- SWITCHING SPEED:..... 100ns MAX
- TTL CONTROL:..... "0=INSERTION LOSS"
"1=20dB ATTENUATION"
- INPUT POWER:..... +20dBm CW MAX
- VSWR:..... 2.0:1 MAX
- DC VOLTAGE:..... +5VDC @ 300 mA
-5VDC @ 300 mA
- CONNECTORS:..... SMA (F) REMOVABLE
- SIZE:..... 1.00" X 0.70" X 0.35"
- FINISH:..... GRAY EPOXY POLIMIDE
COATING IAW MIL-C-22750,
TYPE I OVER EPOXY POLIMIDE
PRIMER IAW MIL-P-23377,
TYPE I, CLASS 1 OR 3.


ENVIRONMENTAL RATINGS:

- TEMPERATURE:..... -20°C TO +70°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY:..... MIL-STD-202F, METHOD 103B COND. B
- SHOCK:..... MIL-STD-202F, METHOD 213B COND. B
- VIBRATION:..... MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE:..... MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE:..... MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	10/22/12	
	A3	ECN # 14-0213	12/23/14	
	A4	ECN # 26-0035	03/04/26	

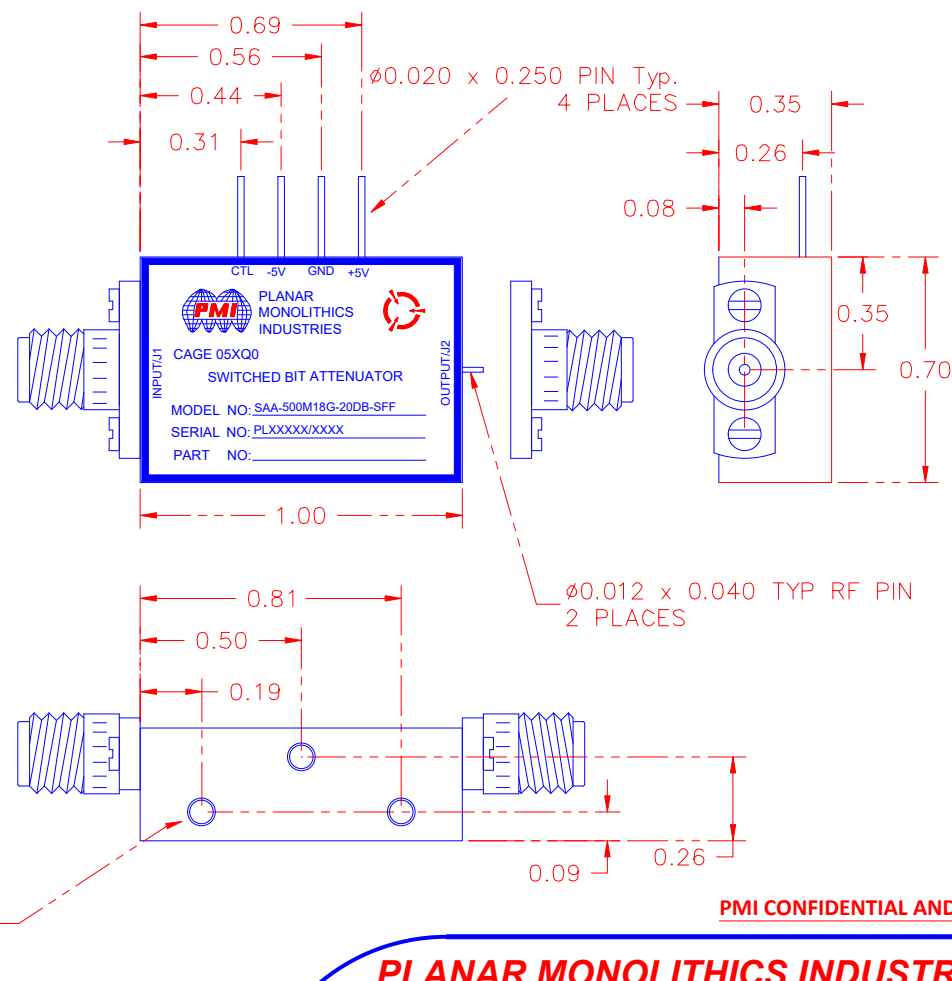

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			REV.
DRAWN <i>JJR</i>		10/22/12	PRODUCT FEATURE			
CHECKED			SAA-500M18G-20DB-SFF			
ISSUED			SIZE	FSCM NO.	DWG NO.	
			A	05XQ0	27017801	A4
			SCALE	N:S	SHEET	1 OF 1