


**DESCRIPTION:**

PLANAR MONOLITHICS INDUSTRIES MODEL LM-30M3G-C3-1 IS A HIGH POWER LIMITER THAT WORKS FROM 30MHz TO 3GHz. THIS LIMITER HANDLES 5 WATTS CW WITH A LEAKAGE POWER OF +10 dBm TYP..

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	8/12/14	
	A1	ECN # 14-0191	11/24/14	
	A2	ECN # 23-0082	4/27/23	

**SPECIFICATIONS:**

- FREQUENCY:..... 30MHz TO 3GHz
- INSERTION LOSS:..... 1.2 dB (MAX.)
- PEAK POWER:..... 5 WATTS CW @ +25 C
- LEAKAGE POWER:..... +10 dBm TYP.
- RECOVERY TIME ..... 1us MAX.
- VSWR: ..... 1.5:1 (MAX.)
- DC BLOCKING:..... INPUT AND OUTPUT
- CONNECTORS:..... 2.92mm (M) Input and 2.92mm (F) Output
- SIZE:..... 1.314 (LENGTH) X .375 (DIAMETER)
- WEIGHT:..... <1 OZ. TYPICAL
- FINISH ..... ALBALOY PLATED

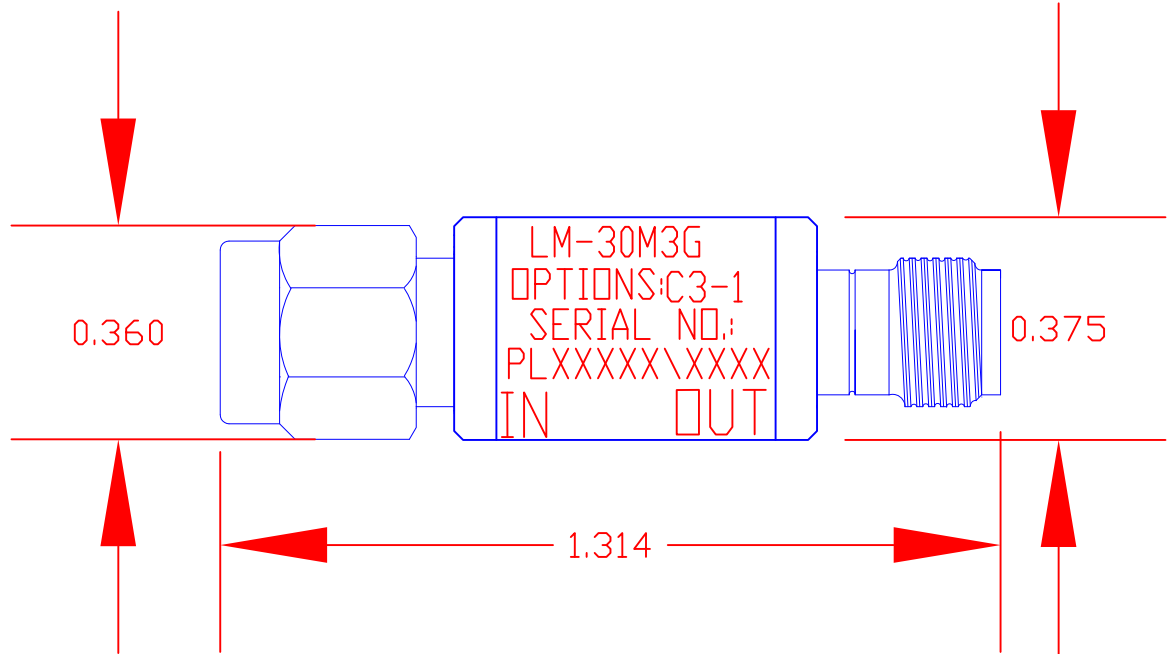

**ENVIRONMENTAL RATINGS**

- TEMPERATURE:..... -55°C TO +125°C (OPERATING) DERATE POWER HANDLING TO ZERO @ +125 C  
-65°C TO +125°C (STORAGE)
- HUMIDITY:..... MIL-STD-202F, METHOD 103B COND. B
- SHOCK:..... MIL-STD-202F, METHOD 213B COND. B
- VIBRATION:..... MIL-STD-202F, METHOD 204B COND. B
- ALTITUDE:..... MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE:..... MIL-STD-202F, METHOD 107D COND. A

**PMI CONFIDENTIAL AND PROPRIETARY**

**PLANAR MONOLITHICS INDUSTRIES, INC.**  
 7311-F GROVE ROAD  
 FREDERICK, MARYLAND 21704 USA  
 TEL: 301-662-5019 FAX: 301-662-1731  
 WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
 E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
 ISO 9001 CERTIFIED

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 X.XX ±0.020  
 X.XXX ±0.010

APPROVALS		DATE	TITLE PRODUCT FEATURE LM-30M3G-C3-1 HIGH POWER LIMITER			
DRAWN <i>VR</i>		8/12/14	SIZE A	FSCM NO. 05XQ0	DWG NO. 27023104	REV. A2
CHECKED			SCALE N:S		SHEET 1 OF 1	
ISSUED						