

DESCRIPTION

PMI MODEL P3T-8G12G-70-T-SFF IS AN ABSORPTIVE, HIGH SPEED, SINGLE POLE THREE THROW SWITCH CAPABLE OF SWITCHING WITHIN 100 ns MAXIMUM. THE FREQUENCY RANGE IS 8.0 GHz TO 12.0 GHz. THIS SWITCH HAS > 70 dB ISOLATION.

SPECIFICATIONS

- FREQUENCY RANGE: _____ 8.0 GHz TO 12.0 GHz
- IMPEDANCE: _____ 50 Ω
- INPUT POWER: _____ +30dBm MAX (SURVIVAL)
+20dBm MAX (OPERATING)
- VSWR: _____ 1.8:1 TYP.
- INSERTION LOSS: _____ 2.8dB MAX
- ISOLATION: _____ 70dB MIN
- SWITCHING SPEED: _____ 100ns MAX
- DC VOLTAGE: _____ +5VDC, 150mA TYP.
-15VDC, 100mA TYP.
- CONTROL: _____ SOLDER PIN
TTL COMPATIBLE - SEE LOGIC TABLE
- CONNECTORS IN/OUT: _____ SMA (F)
- SIZE: _____ (L) 1.5" X (W) 1.5" X (H) 0.4"
- FINISH: _____ BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750, TYPE I OVER EPOXY POLIMIDE PRIMER IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.

LOGIC TABLE			
E1	E2	E3	FUNCTION
0	1	1	J1-J2 "LOW LOSS"
1	0	1	J1-J3 "LOW LOSS"
1	1	0	J1-J4 "LOW LOSS"

ENVIRONMENTAL RATINGS


- TEMPERATURE: _____ -55°C TO + 85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: _____ MIL-STD-202F, METHOD 103B COND. B
- SHOCK: _____ MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: _____ MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: _____ MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: _____ MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	11/18/15	
	A1	ECN # 16-0099	8/18/16	

MECHANICAL OUTLINE

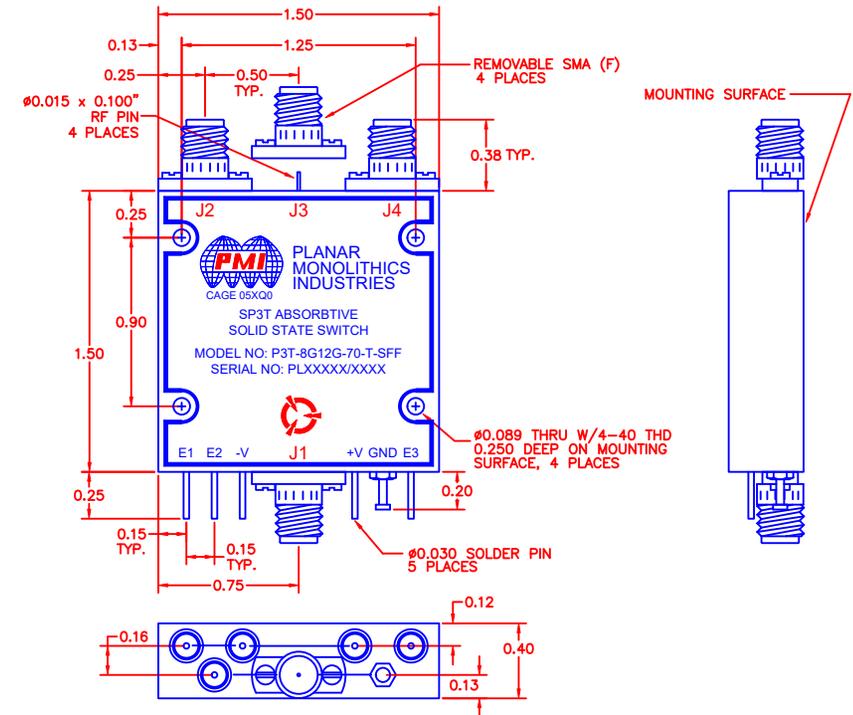

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN	GAB	11/18/15	PRODUCT FEATURE P3T-8G12G-70-T-SFF		
CHECKED			SIZE	FSCM NO.	DWG NO.
ISSUED			A	05XQ0	27026601
			SCALE	N:S	SHEET 1 OF 1