

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	10/9/15	


DESCRIPTION

PMI MODEL P1T-10M1G-80-R-SFF IS A REFLECTIVE, HIGH SPEED, SINGLE POLE SINGLE THROW SWITCH CAPABLE OF SWITCHING WITHIN 200 ns MAXIMUM. THE FREQUENCY RANGE IS 0.010 GHz TO 1.0 GHz. THIS SWITCH HAS > 80 dB ISOLATION.

SPECIFICATIONS

- FREQUENCY RANGE: 0.010 GHz TO 1.0 GHz
- IMPEDANCE: 50 Ω
- INPUT POWER: +30dBm MAX (SURVIVAL)
+20dBm MAX (OPERATING)
- INPUT VSWR: 1.5:1 TYP.
- INSERTION LOSS: 1.0dB TYP.
- ISOLATION: 80dB TYP.
- SWITCHING SPEED: 200ns MAX
- DC VOLTAGE: +5VDC, 20mA TYP.
-15VDC, 20mA TYP.
- CONTROL: SOLDER PIN
TTL COMPATIBLE
"0" = INSERTION LOSS
"1" = ISOLATION
- CONNECTORS IN/OUT: SMA (F)
- SIZE: (L) 1.0" X (W) 1.0" X (H) 0.5"
- FINISH: BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750, TYPE I OVER EPOXY POLIMIDE PRIMER IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.

MECHANICAL OUTLINE

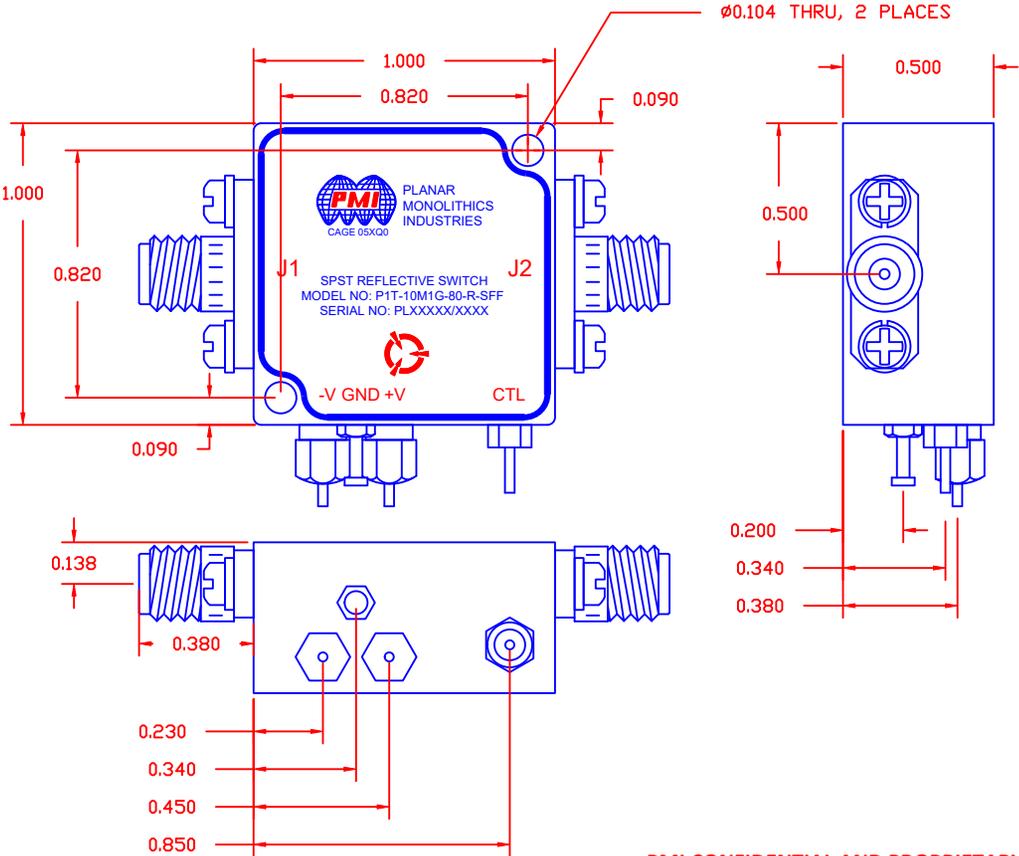

PMI CONFIDENTIAL AND PROPRIETARY

ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO + 85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN GAB		10/9/15	PRODUCT FEATURE P1T-10M1G-80-R-SFF		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. 27026981
ISSUED			SCALE N: S		SHEET 1 OF 1
					REV. A1