

DESCRIPTION

PMI MODEL: DD-34G37G-N-ZBS-15DBM-292MF IS A LOW NOISE ZERO BIASED DETECTOR OPERATING OVER THE 34 TO 37 GHz FREQUENCY RANGE. THIS MODEL OFFERS EXCELLENT DYNAMIC RANGE AND A TYPICAL OUTPUT VOLTAGE OF MORE THAN 2 VOLTS @+15DBM INPUT POWER INTO A 600Ω LOAD.

SPECIFICATIONS (WITH HIGH IMPEDANCE LOAD)

- FREQUENCY RANGE: ----- 34 TO 37 GHz
- POLARITY: ----- NEGATIVE
- VOLTAGE SENSITIVITY: ----- >500 mV/mW (Open Circuit)
- DYNAMIC VOLTAGE OUTPUT:----- >2.0 V OUTPUT @+15dBm (into a 600Ω load)
- VOLTAGE OUTPUT:----- -1.2 V ±0.1 @35GHz @+12dBm (into a 600Ω load)
- TANGENTIAL SENSITIVITY: ----- -40 dBm Minimum (7MHz Bandwidth)
- TEMPERATURE STABILITY: ----- ±0.5 dB TYPICAL OVER TEMP EXTREMES
- MAXIMUM FLATNESS: ----- ±1 dB Max
- RISE TIME: ----- 5 ns TYPICAL
- VSWR: ----- 5.5:1 Max
- OUTPUT CAPACITANCE: ----- <10 pF TYPICAL
- OUTPUT RESISTANCE: ----- <3.5KΩ TYPICAL
- INPUT POWER: ----- +20dBm CW MAXIMUM
- CONNECTORS: ----- 2.92 mm MALE IN/ FEMALE OUT
- SIZE: ----- (L) 1.30" x Ø0.31"
(L) 33.02 mm x Ø7.87 mm
- FINISH: ----- ALBALOY PLATING

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -20 °C TO +85 °C (OPERATING)
-55 °C TO +100 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. G (50g, 11 ms)
- VIBRATION: ----- MIL-STD-202, METHOD 204D COND. D (20 g, 10 - 2000 MHz)
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION


PMI CONFIDENTIAL AND PROPRIETARY

ALL DIMENSIONS
ARE IN INCHES (mm)
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

LABEL



MECHANICAL OUTLINE

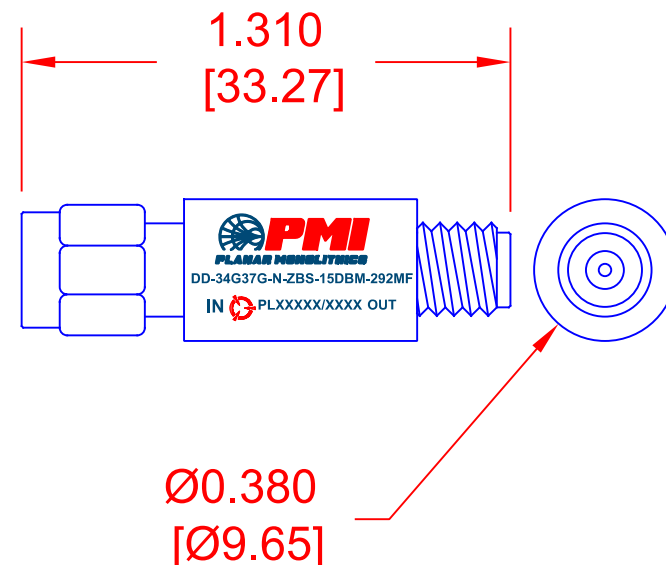

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE		REV.	
DRAWN		E. Benson		06/26/2020		PRODUCT FEATURE	
REDRAWN						DD-34G37G-N-ZBS-15DBM-292MF	
ISSUED						A	
SIZE		FSCM NO.		DWG NO.		REV.	
A		05XQ0		27055800		A1	
SCALE		N:S		SHEET		1 OF 1	