

SUMMARY TEST DATA ON P8T-0R5G18G-60-T-SFF-PN

Customer: _____
 SO No: _____
 Model No: P8T-0R5G18G-60-T-SFF-PN
 Serial No: 34111

Tested By: L. McGraw
 Temperature: +25°C
 Date: 1/31/2023
 Drawing No: 27616561 Rev: A2




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	0.5 - 18 GHz	0.5 - 18 GHz	PMI QA2	
2	Isolation:	55 dB Min.	55 dB See Plot		
3	Insertion Loss:	4.5 dB Max.	4.18 dB See Plot		
4	VSWR: (In/Out)	2.0:1 Max.	1.99:1 In 1.98:1 Out See Plot		
5	Operating Input Power:	+20 dBm CW Max.	See Typical Characteristics		
6	Switching Speed:	100 ns Max.	See Typical Characteristics		
7	DC Supply:	+5 VDC @ 400 mA Typ. -5 VDC @ 100 mA Typ.	+5 VDC @ 66 mA -5 VDC @ 17 mA		
8	Control Signal:	Eight Line TTL E1: J1-J2 E2: J1-J3 E3: J1-J4 E4: J1-J5 E5: J1-J6 E6: J1-J7 E7: J1-J8 E8: J1-J9 "0" Isolation "1" Insertion Loss	Pass		PMI QA2

QA/QC Approval:  PMI
QA2

Date: 1/31/2023

**SUMMARY TEST DATA
ON
P8T-0R5G18G-60-T-SFF-PN**

34111

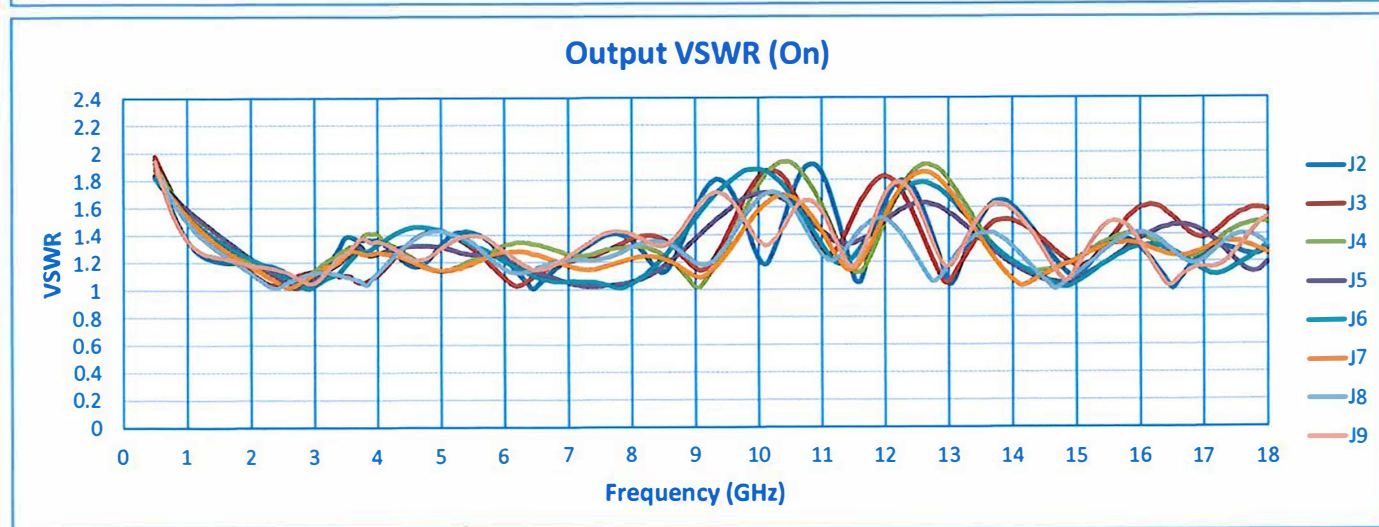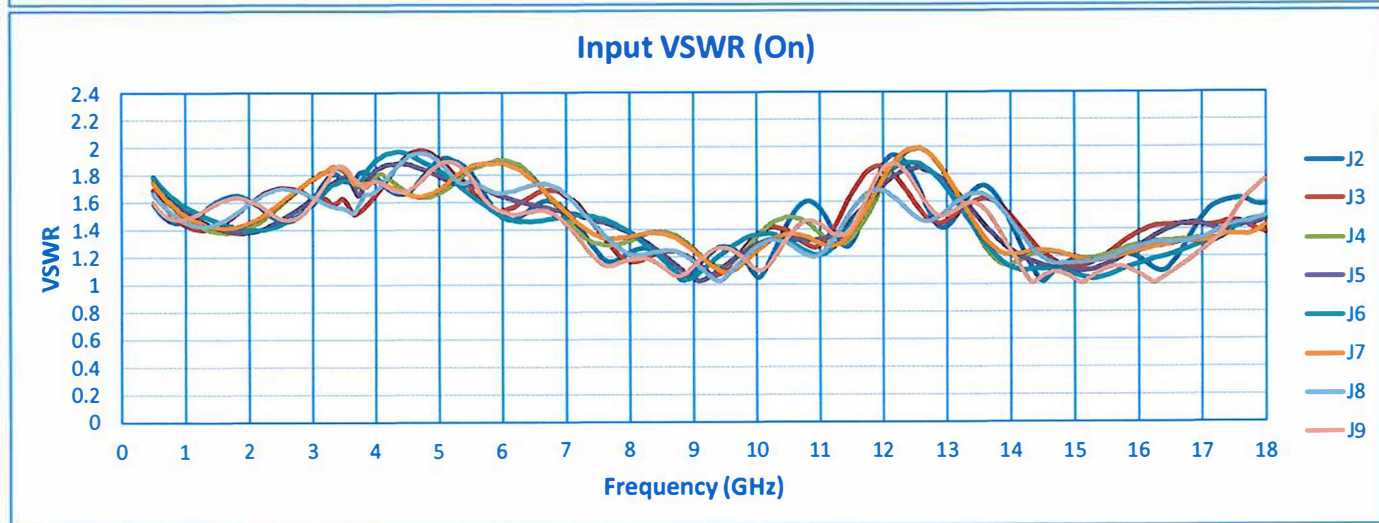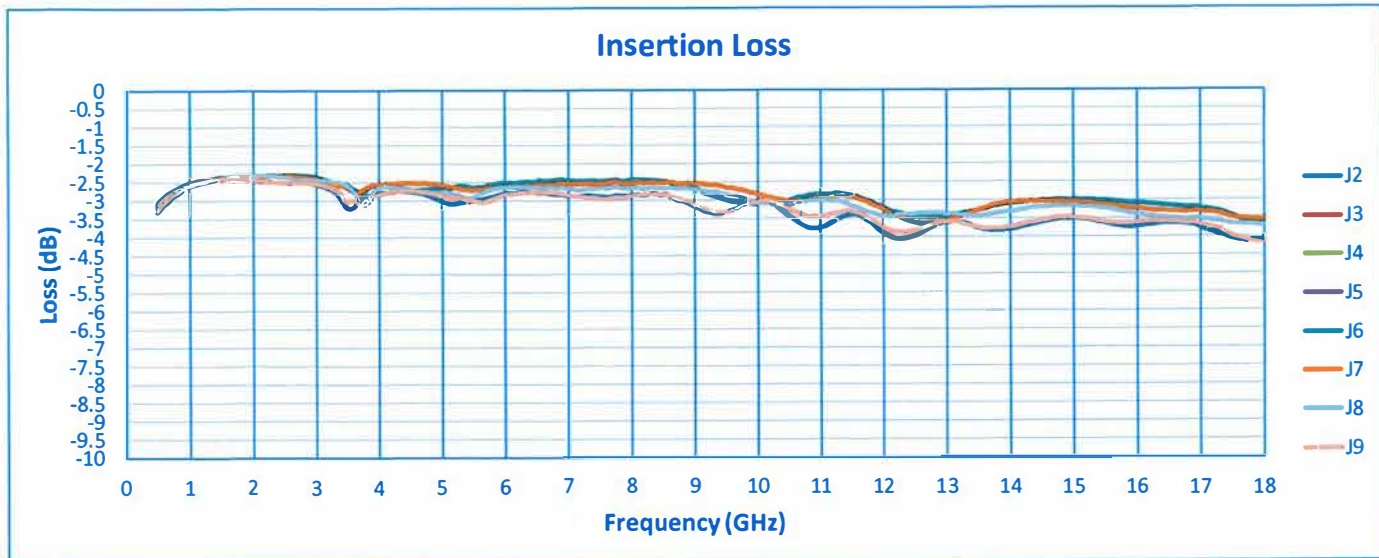

SUMMARY TEST DATA ON P8T-0R5G18G-60-T-SFF-PN

34111

