

**SUMMARY TEST DATA  
ON  
P3T-8G12G-70-T-SFF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P3T-8G12G-70-T-SFF  
 Serial No: 34153  
 Part No: \_\_\_\_\_

Tested By: L. McGraw  
 Temperature: 25°C  
 Date: 4/6/2023  
 Drawing No: 27026602      Rev: A1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	8 GHz to 12 GHz	8 GHz to 12 GHz	PMI QA2	
2	Impedance	50 Ω	Pass		
3	Operating Power CW	20 dBm Max	Pass See Typical Characteristics		
4	Survival Power CW	30 dBm Max	Pass See Typical Characteristics		
5	VSWR: In/Out	1.8 dB Typ.	1.17:1 In 1.48:1 Out		
6	Insertion Loss	2.8 dB Max.	2.33 dB		
7	Isolation	70 dB Min.	77.4 dB		
8	Switching Speed Max	100 ns Max.	Pass See Typical Characteristics		
9	Power Supply	5 V @ 150 mA Typ -15 V @ 100 mA Typ	5 V @ 78 mA -15 V @ 68 mA		
10	Control Signal	TTL LOGIC '0' : Insertion Loss '1' : Isolation	Pass		PMI QA2

QA/QC Approval:       PMI  
QA2

Date: 4/10/2023

SUMMARY TEST DATA  
ON  
P3T-8G12G-70-T-SFF

34153

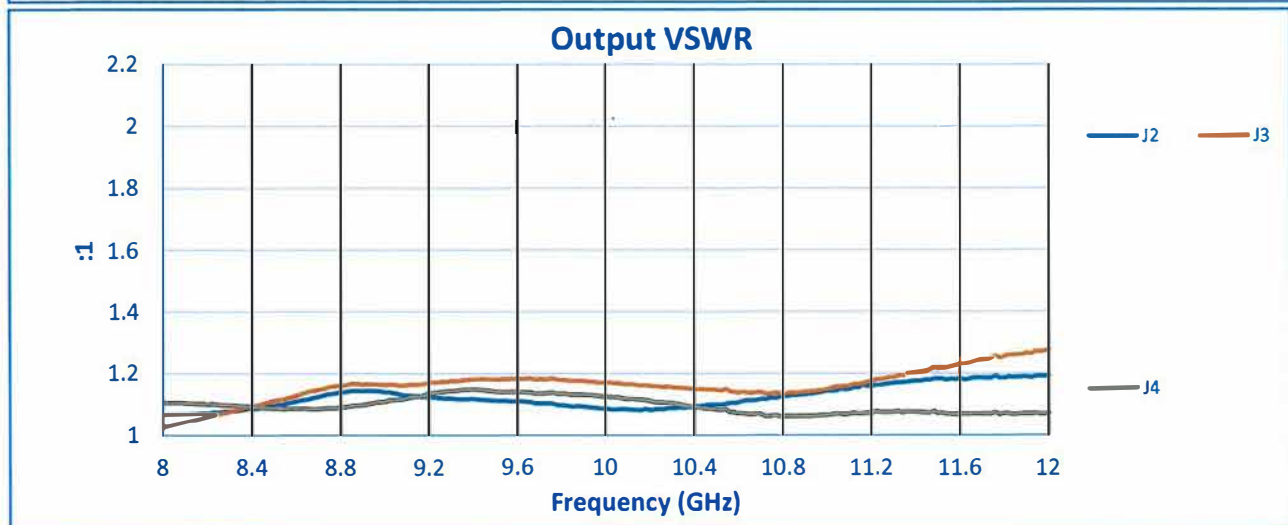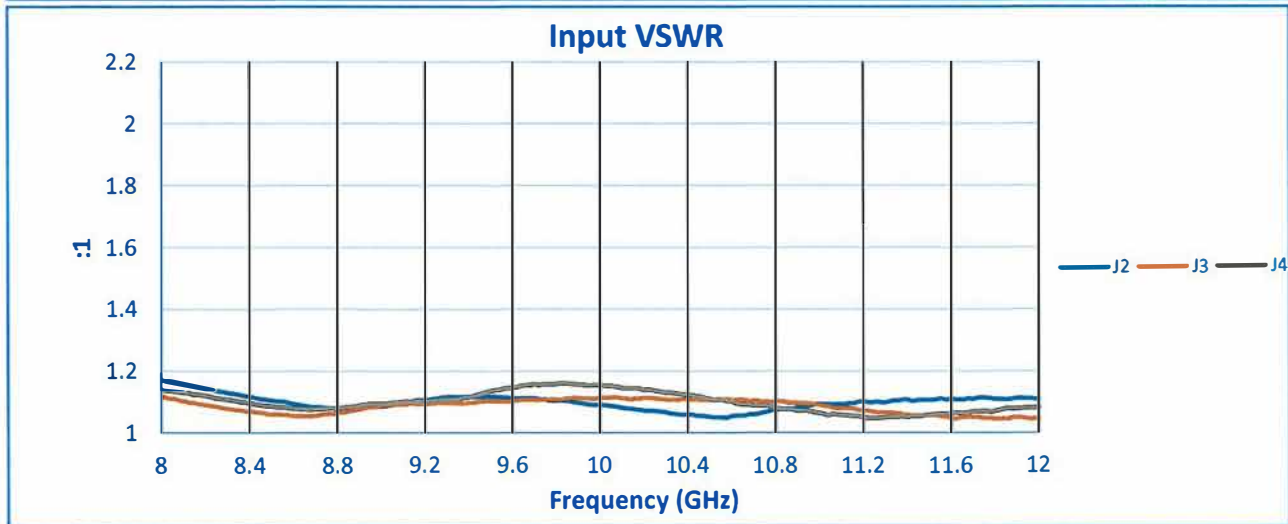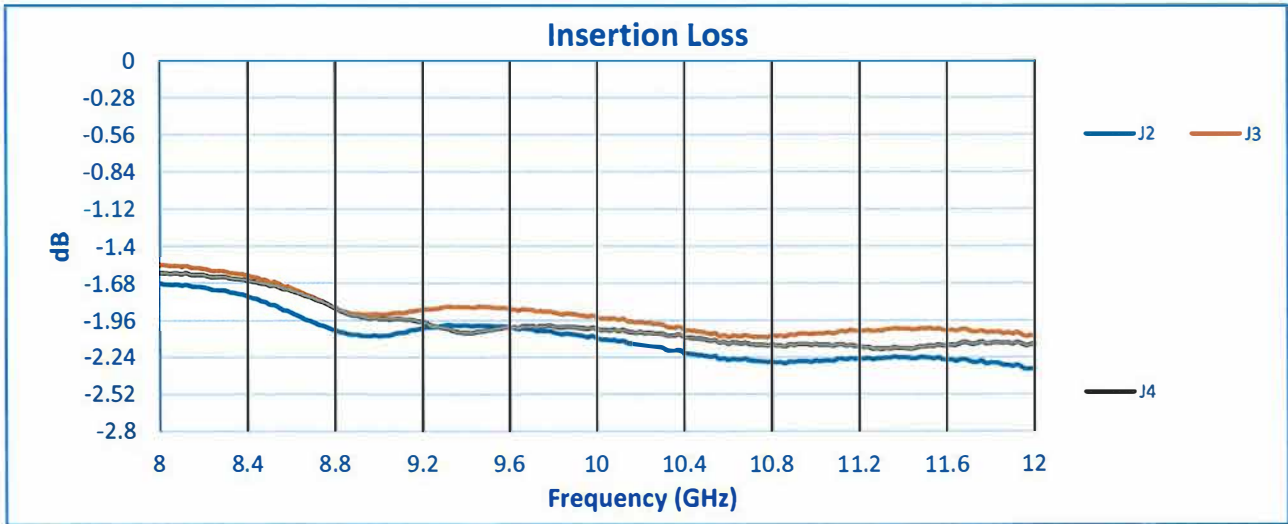

SUMMARY TEST DATA  
ON  
P3T-8G12G-70-T-SFF

34153

